


GLO-BALL BASIC ZERO

Designed by Jasper Morrison, 2009


F3330009

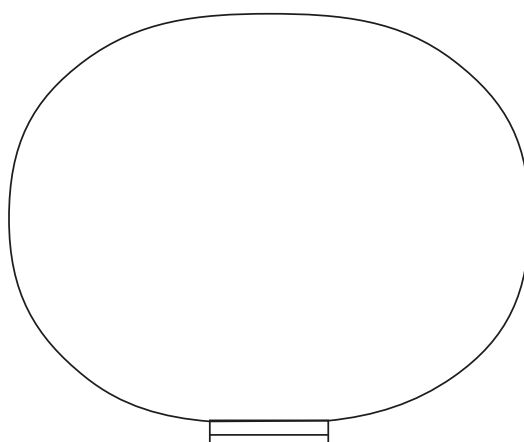

GLO-BALL BASIC ZERO

F3330009

EN

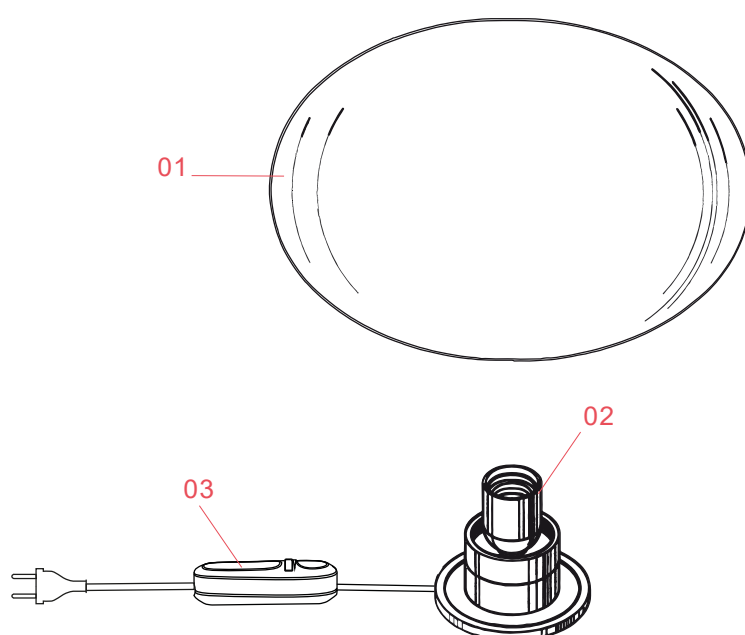

01. RF3335100 – Diffuser assembly

02. RF18844 – Lamp holder fitting E14

03. RF28206 – Led dimmer 1004P LFP100-240V 4-150WHL

GLO-BALL BASIC ZERO F3330009

EN

RF3335100

DIFFUSER ASSEMBLY



Glo-ball
Basic 0
p.03



Glo-ball
C/W zero
p.03

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

RF3335100

DIFFUSER ASSEMBLY

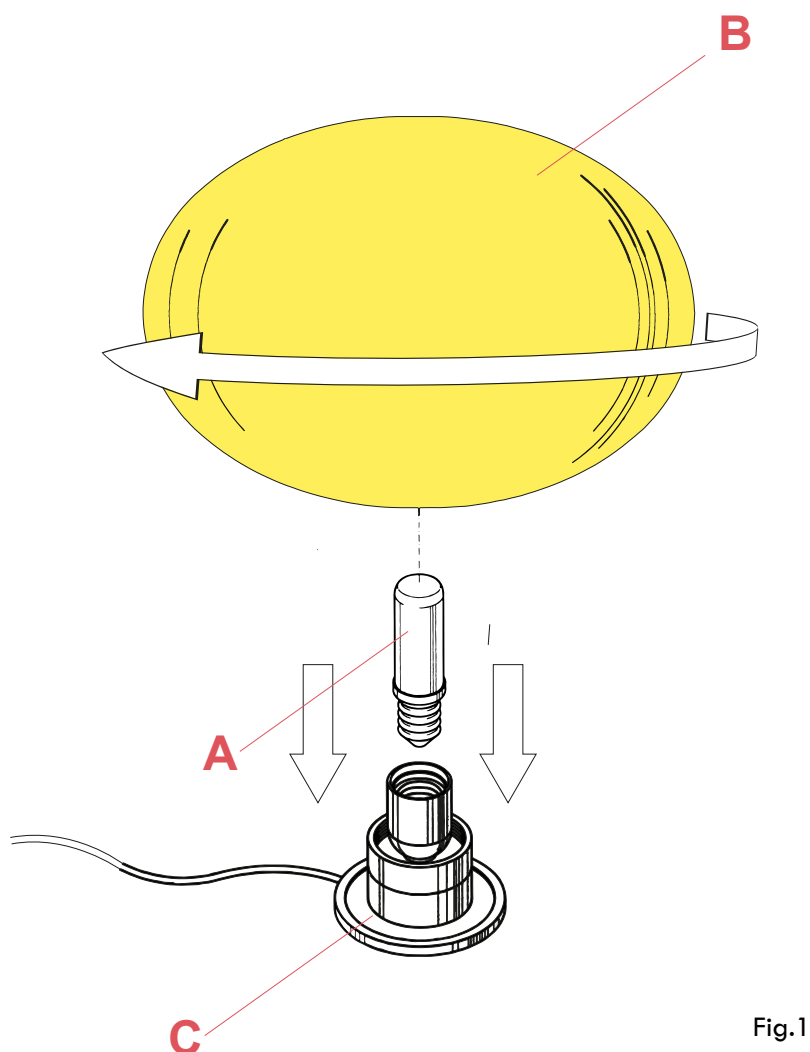


Fig.1

Insert the bulb (A). Position the diffuser (B) on the support (C) and secure it, turning it clockwise.

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

GLO-BALL BASIC ZERO F3330009

EN

RF18844

LAMP HOLDER FITTING E14



Glo-ball
Basic 0
p.05



Glo-ball
C/W zero
p.05

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

GLO-BALL BASIC ZERO F3330009

EN

RF18844

LAMP HOLDER FITTING E14



Fig.1

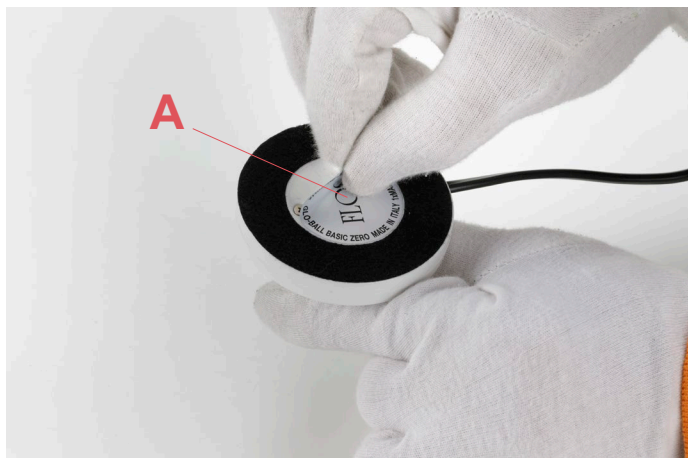


Fig.2

Turn upside down the electrical assembly and remove delicately without tearing the label (A) from the base (do not throw away).

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - www.flos.com
Flos reserves the right to introduce any changes to its own models, without prior notice.

RF18844

LAMP HOLDER FITTING E14



Fig.3

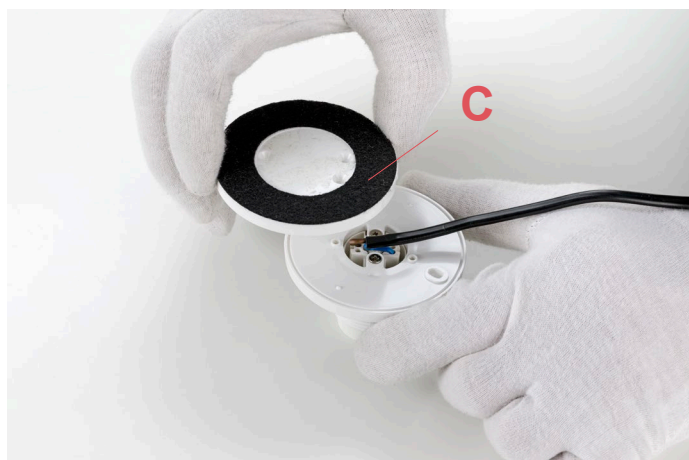


Fig.4

Unfasten the three screws (B) present on the base.

Remove the base (C) from the assembly.

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - www.flos.com
Flos reserves the right to introduce any changes to its own models, without prior notice.

GLO-BALL BASIC ZERO F3330009

EN

RF18844

LAMP HOLDER FITTING E14

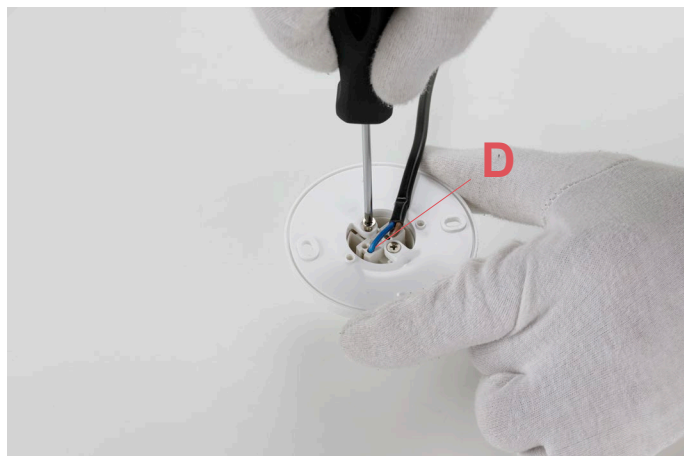


Fig.5



Fig.6

Unfasten the lamp holder fixing screws (D) and free the lamp holder (E) from the assembly.

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - www.flos.com
Flos reserves the right to introduce any changes to its own models, without prior notice.

GLO-BALL BASIC ZERO F3330009

EN

RF18844

LAMP HOLDER FITTING E14

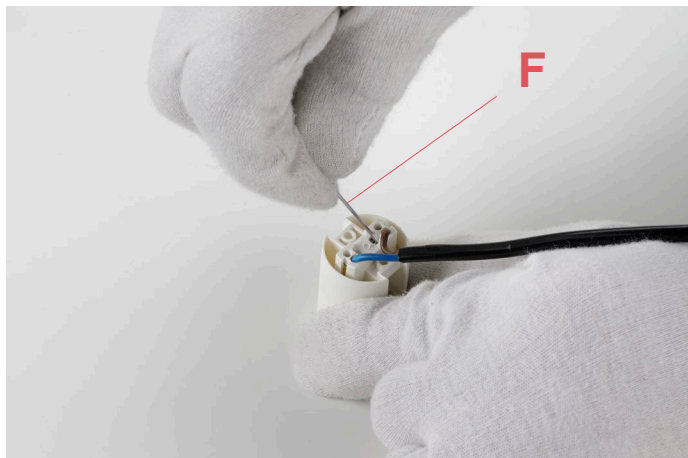


Fig.7

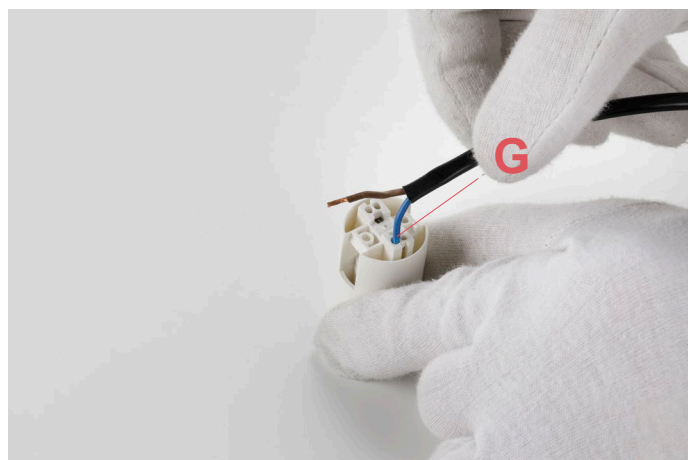


Fig.8

Disconnect the electrical wires (G) from the lamp holder by pressing the push terminals with a paper clip (F).

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - www.flos.com
Flos reserves the right to introduce any changes to its own models, without prior notice.

RF18844

LAMP HOLDER FITTING E14



Fig.9

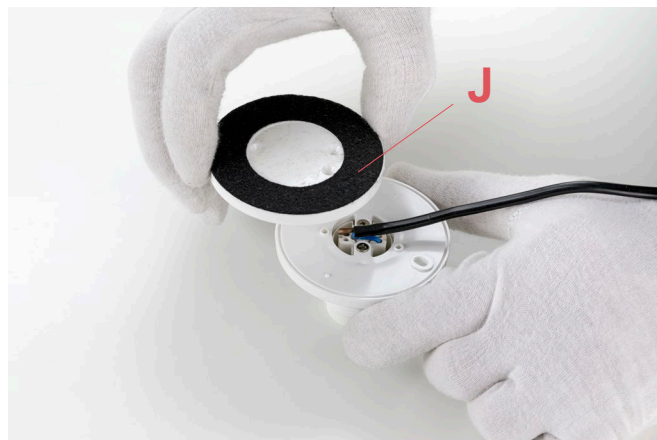


Fig.10



Fig.11



Fig.12

Assemble now the new spare-part:

Connect the electrical wires by utilizing always paper clip. Connect the Brown “L” (live) wire in the terminal that corresponds (opposite side) to the centre brass contact of the lamp holder and then connect the Blue “N” (neutral) wire in the other terminal.

N.B. The electrical wires are connected by pushing the wires inside the terminals, therefore it is necessary to verify that they are connected properly.

Insert the lamp holder inside the assembly and fasten the lamp holder fixing screws (H) and then position the electrical cable (I) between the two threaded holes.

Position the base (J) on top of the assembly (the holes of the base must correspond with the holes of the assembly) and then fasten the three screws (K).

Glue the lamp label (L) back-on the base.

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

GLO-BALL BASIC ZERO F3330009

EN

RF28206

LED DIMMER 1004P LFP100-240V 4-150WHL



Bedside
Gun
p.12



Chiara T
p.03



Glo-ball
Basic 0
p.11



Glo-ball
Basic 1
p.14



Glo-ball
Basic 2
p.05



Glo-ball
T1
p.11



Ic T1
High
p.08



Ic T1
Low
p.08



Ic T2
p.08



Ktribe T1
p.05



Ktribe T2
p.05



Miss K
p.13



Ray T
p.17



Romeo
Moon T1
p.32



Romeo
Soft T1
p.32



Spun
Light T1
p.12



Spun
Light T2
p.12




Table
Gun
p.12

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

GLO-BALL BASIC ZERO F3330009

EN

RF28206

LED DIMMER 1004P LFP100-240V 4-150WHL



Fig.1



Fig.2

Open the dimmer box of the damaged dimmer. For the opening, it is necessary to remove the n°2 screws using a star screw driver.

Lift-up the dimmer casing from the dimmer base;

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - www.flos.com
Flos reserves the right to introduce any changes to its own models, without prior notice.

RF28206

LED DIMMER 1004P LFP100-240V 4-150WHL

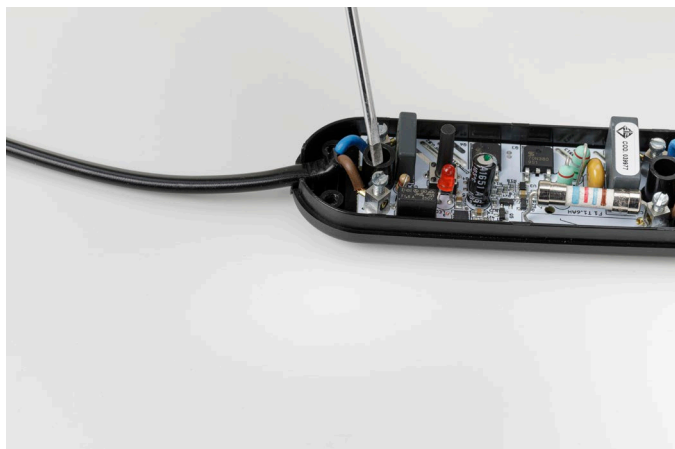


Fig.3

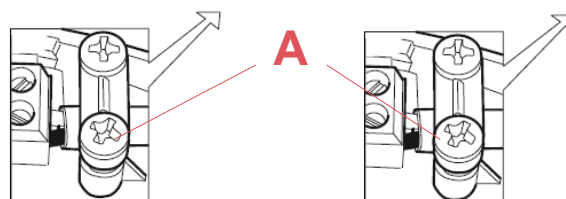


Fig.3.1

Remove the cable clamps by unfastening the 4 screws (A) and disconnect the wires from the terminal blocks through a tiny flat headed screw driver;

Replace the dimmer and connect the wires. When connecting the wires it is necessary to respect the polarities (L = Brown and N = Blue) to the terminal box.

Lock the electrical cables by fastening the screws (A) of the cable clamps and make sure to block the isolation of the electrical cable.

Close the dimmer box.

It is necessary to place the casing on top and press down until it locks in.

it is necessary to insert the n°2 screws using a star screw driver

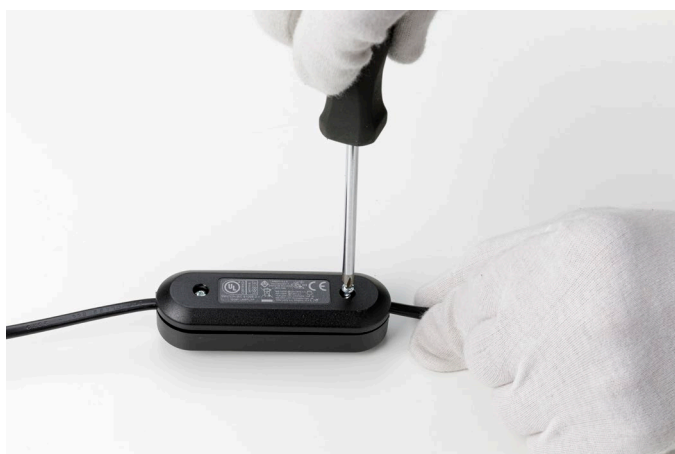


Fig.4