

FRISBI F2500000

EN

RF00862

REFLECTOR



WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - www.flos.com
Flos reserves the right to introduce any changes to its own models, without prior notice.

FRISBI F2500000

EN

RF00862

REFLECTOR

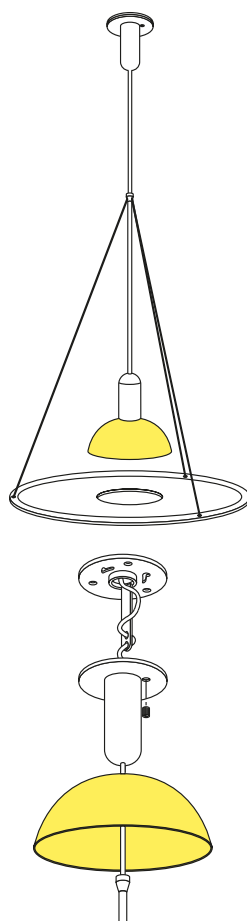


Fig.1

Remove the Plexiglas diffuser (J) by unhooking the steel suspension wires from the “tige” rod clamp (H);
Remove the ceiling rose (D) by unfastening the screw (E) and then disconnect the lamp electrical wires from the electrical terminal box;

Remove the electrical cable from the wall attachment (A) and ceiling rose (D) and then remove the reflector (B) from the “tige” rod (I);

Install the new reflector by inserting it through the electrical cable (C) and through the “tige” rod (I) and then install the appliance (refer to installation sheet).

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.