

WARNING

ATENCIÓN




Only use with the electrical supply track system:
Usar solo con los siguientes sistemas de carriles eléctricos:

“The Tracking Magnet EVO System or Infra-Struccture EVO System ”


LUMINAIRE INSTALLATION

INSTALACIÓN DE LA LUMINARIA / INSTALLAZIONE DELLA LAMPADA / INSTALLATION DER BELEUCHTUNG / INSTALLATION DU LUMINAIRE / INSTALAÇÃO DO APARELHO DE ILUMINAÇÃO / 照明器具の設置・据付け / 灯具的安装 / МОНТАЖ ОСВЕТИТЕЛЬНОГО ПРИБОРА / ШАМДАЛДЫ ОРНАТУ / تركيب وحدة الإنارة



SPOTS

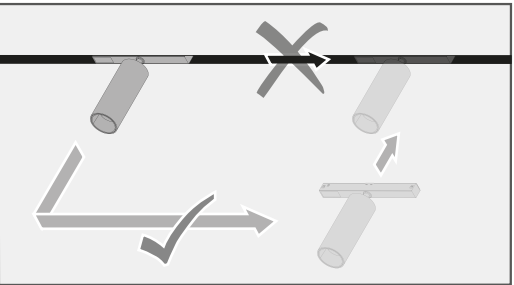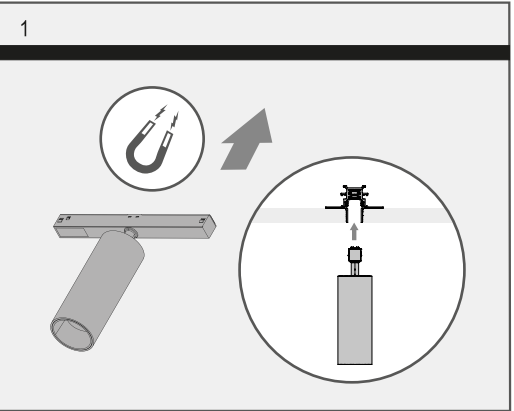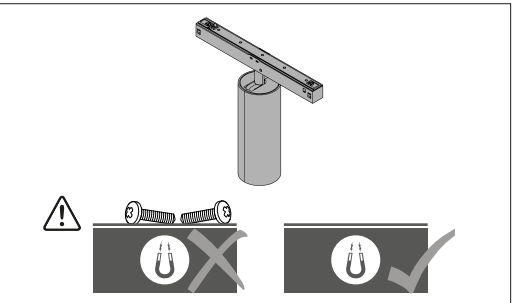

WARNING:
Only allowed ceiling installation for Traking Magnet EVO.
Solo se permite la instalación en el techo para Tracking Magnet EVO

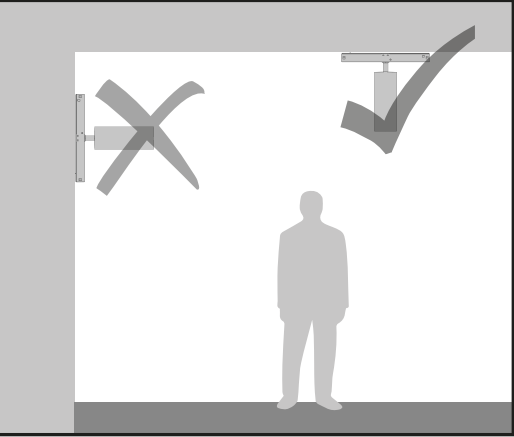


MULTI SPOT MINI

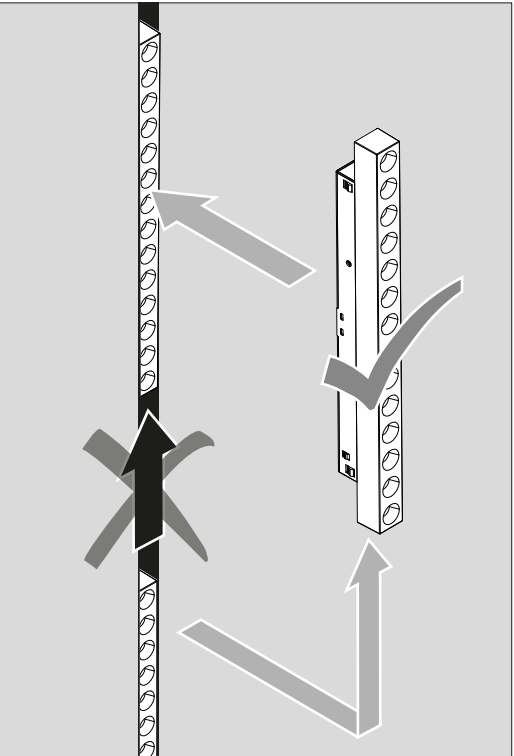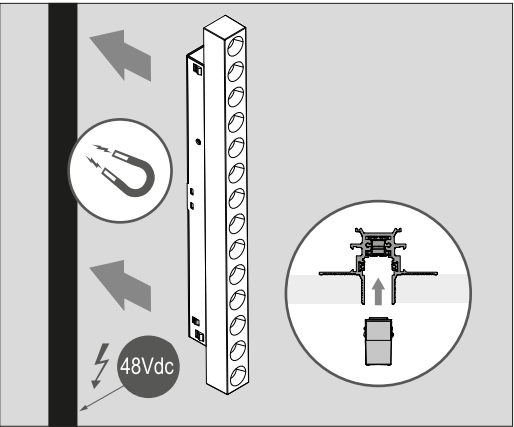


C TILT AND LOCKING ADJUSTMENT

REGULACIÓN DE LA INCLINACIÓN Y BLOQUEOS / REGOLAZIONE DELL'INCLINAZIONE E BLOCCHI / NEIGUNGSREGLER UND SPERREN / RÉGLAGE DE L'INCLINAISON ET VERROUILLAGES / REGULAÇÃO DA INCLINAÇÃO E BLOQUEIOS / 角度調節と固定 / 调节倾斜度和锁定装置 / РЕГУЛИРОВКА НАКЛОНА С ФИКСАЦИЕЙ / БҢКЕЙІТУДІ ЖӨНЕ ҚҰРСАУЛАУДЫ РЕТТЕУ / ضبط الإمالة والكيح

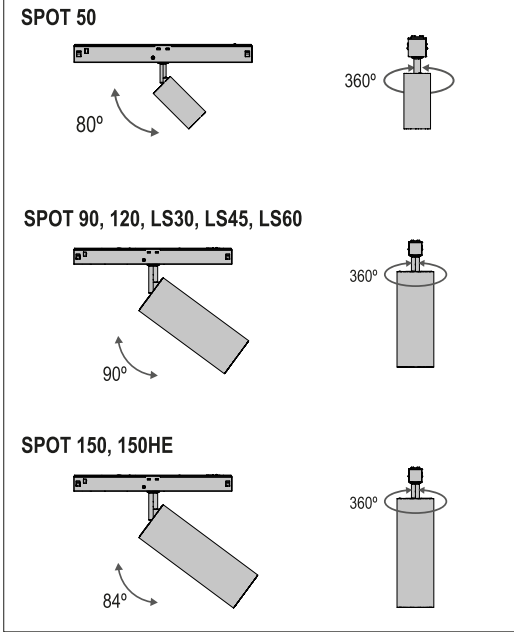


SPOT 150 - SPOT 150HE





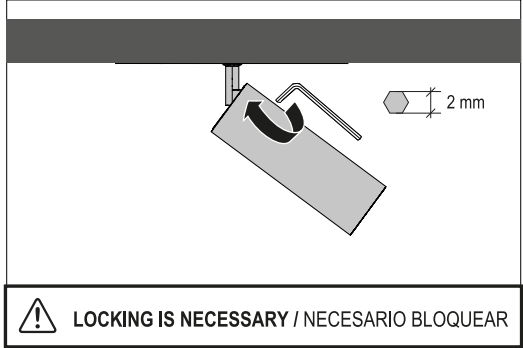


C ACCESSORIES




ACCESORIOS / ACCESSORI / ZUBEHÖR / ACCESSOIRES / ACCESSÓRIOS / アクセサリー / 配件 / АКСЕССУАРЫ / КЕРЕК-ЖАРАҚТАР / التمسيرات

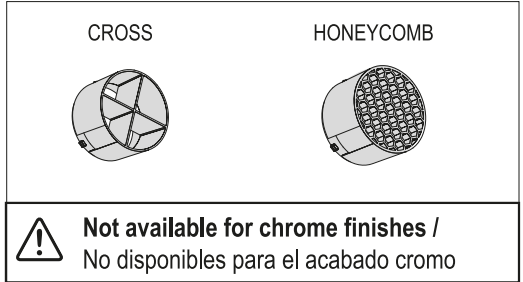


ACCESSORIES FOR SPOT 50

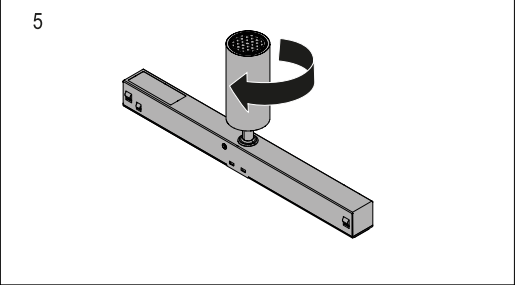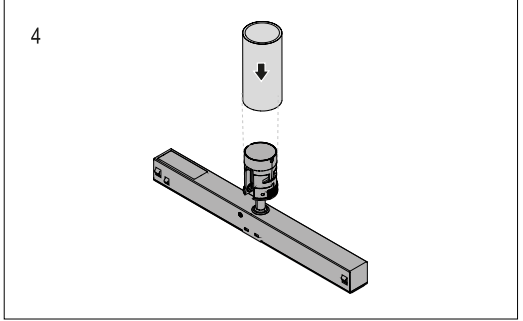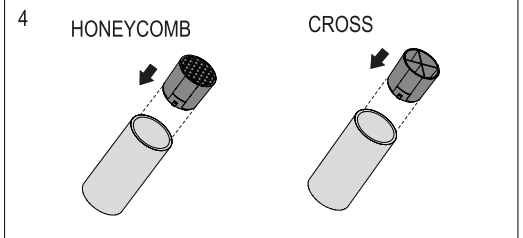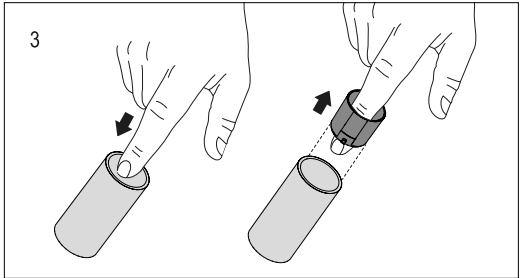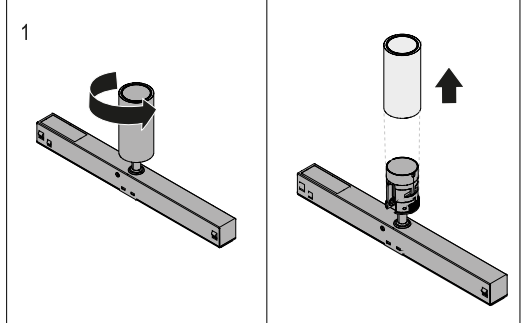


ACCESSORIES FOR SPOT 90

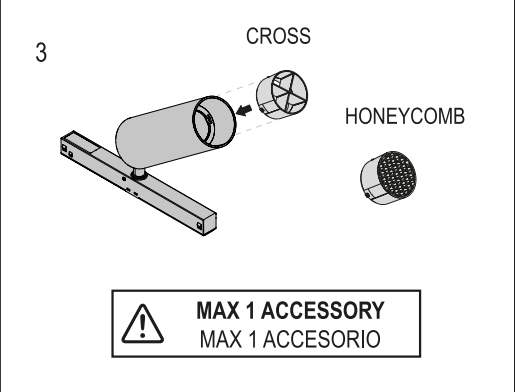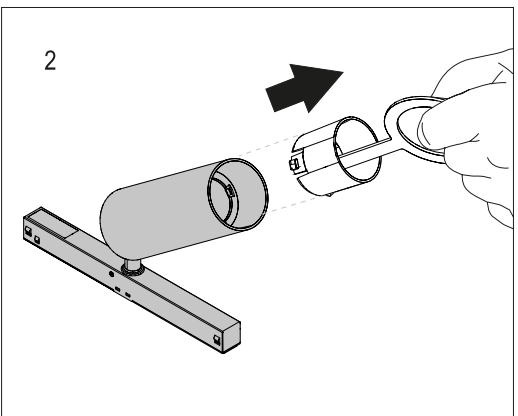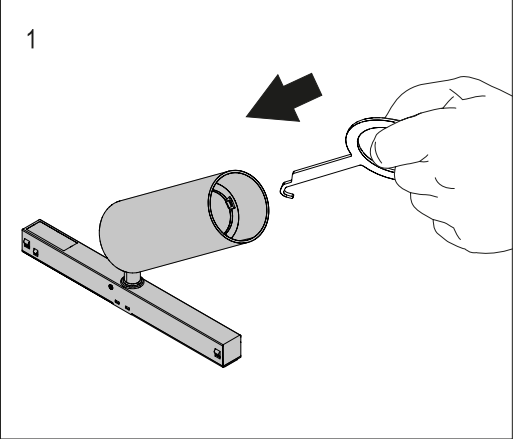


ACCESSORIES FOR SPOT 120 +150 +150HE

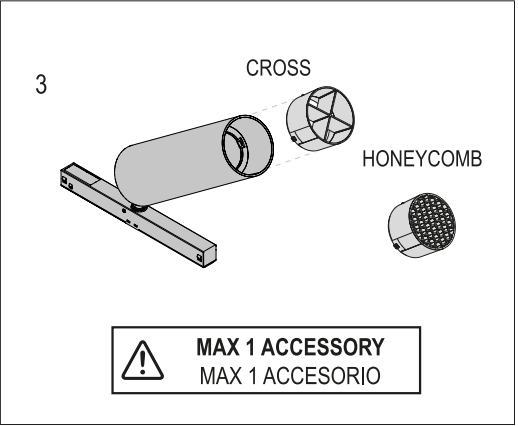



ACCESSORIES FOR LIGHT SHADOW 60

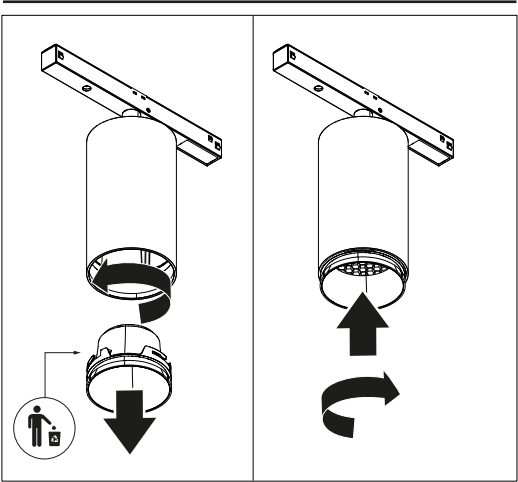




ACCESSORIES FOR LIGHT SHADOW 30

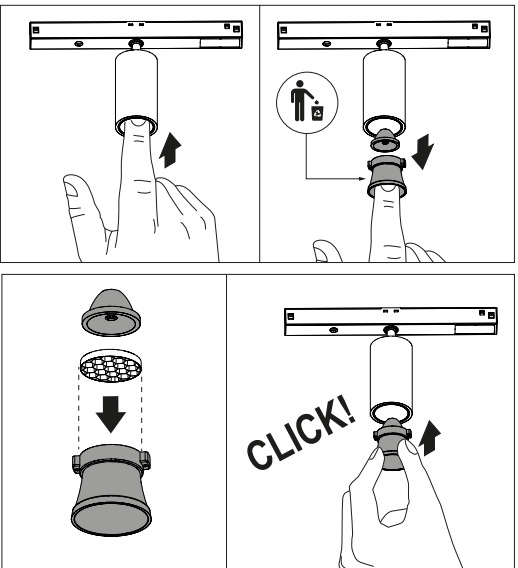

ACCESSORIES FOR LIGHT SHADOW 45

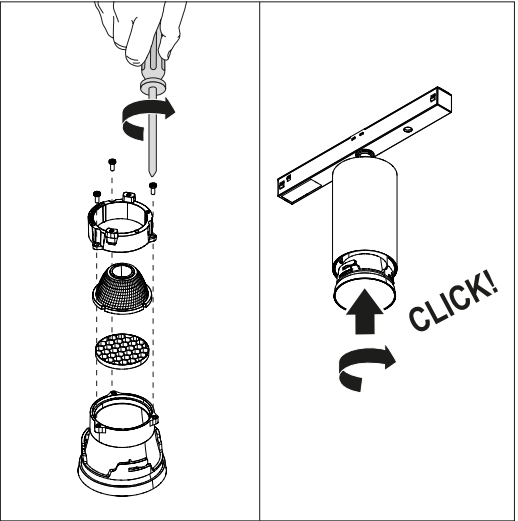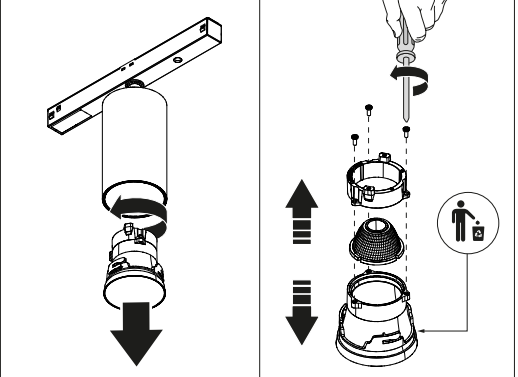

A.4 SPOT STRUCTURE

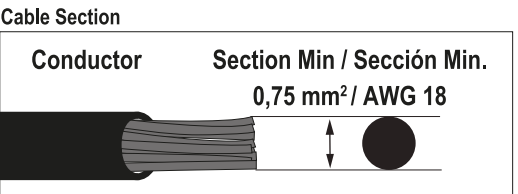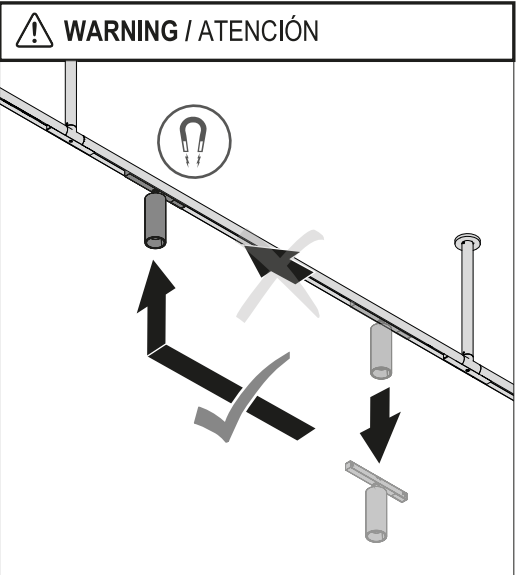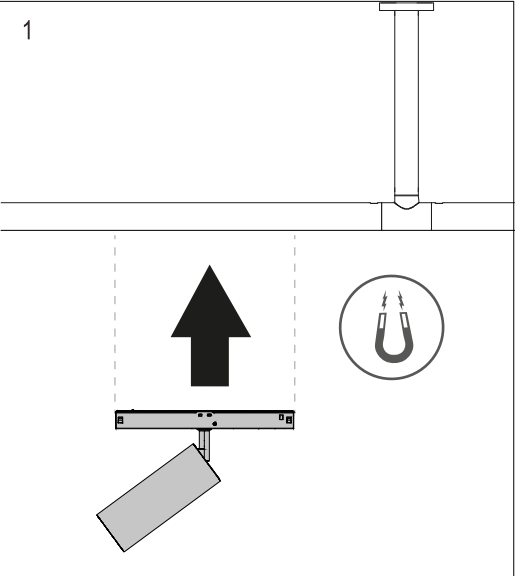

WARNING

ADVERTENCIA

Calculate the total power of system output by applying a safety coefficient of +15% without exceeding the driver's full potential.
Calcule la potencia total de salida del sistema aplicando un coeficiente de seguridad de + 15% sin exceder el potencial total del conductor.

mm	inch
16	0,63
24	0,94
35	1,37
46	1,81
50	1,96
57	2,24
90	3,54
120	4,72
150	5,90
178	7,00

CASAMBI VERSION

- MAX. 200: Luminaires for a single CASAMBI network. / Luminarias para una sola red CASAMBI.
- The CASAMBI control will be / El control CASAMBI será del : 1% to 100%
- MAX. 15: Meters between luminaires if the environment is an open space (no wall in between luminaires) / Metros entre luminarias si el entorno es un espacio abierto (sin pared entre luminarias)
- To know more about all CASAMBI options visit / Para saber más sobre todas las opciones de CASAMBI visite : www.casambi.com

WARNING / ADVERTENCIA

E

La luminaria debería colocarse de forma que no se espera una mirada prolongada a la luminaria a una distancia más cercana a X m

GB

The luminaire should be positioned so that prolonged staring into the luminaire at a distance closer of X m. is not expected.

I

L'apparechio dovrà essere collocato in modo che non ci si aspetti uno sguardo prolungato verso l'apparechio da una distanza di circa x m.

D

Die Lampe ist so zu positionieren, dass ein direkter Blick vermieden wird. Dies geschieht durch eine Längspositionierung auf x Metern Distanz.

F

Le luminaire doit être positionné de manière à ne pas attendre un regard prolongé vers le luminaire à une distance proche de x mètres.

P

A luminária deverá ser posicionada de tal forma que uma pessoa a x metros de distancia não mantenha o olhar prolongado à mesma.

JP

本照明器具は、X mより近い距離から内部を長時間凝視することがない場所に設置してください。

CN

请勿将灯具放置于接近于离视线 X 公尺的距离。。

RU

Светильник должен располагаться таким образом, чтобы длительное смотрение на светильник находилось на расстоянии x м

AR

متر لتجنب انظر الى الإنارة لمدة طويلة، يجب وضع الإنارة على مسافة أقرب من

KZ

Ұзақ қарау күтілмейт а x м-ға ең жақын дейінгі қашықтықтағы жарық түсірілш құрылғы оранлыстырған жөн

LIGHT SHADOW SPOT 30		
OPTICS	T°	X
Spot	2700 K	X = 50cm
Medium	3000 K	X = 175 cm
Spot	3000 K	X = 175 cm
Spot	4000 K	X = 360 cm
Medium	4000 K	X = 226 cm
Flood	4000 K	X = 168 cm
W.Flood	4000 K	X = 140 cm
Light Shadow Spot 45		X = 250 cm
Light Shadow Spot 60 (Super Spot)		X = 250 cm
Spot 90		X = 180cm
Spot 120		X = 260cm

ALL VERSIONS

- CLASIFICACION ENERGÉTICA

- ENERGY CLASSIFICATION

EXCEPT

LIGHT SHADOW SPOT 30 - 4000K

- CLASIFICACION ENERGÉTICA

- ENERGY CLASSIFICATION

MULTI SPOT MINI

- CLASIFICACION ENERGÉTICA

- ENERGY CLASSIFICATION

Replaceable (LED only) light source by a professional / Fuente de luz (solo LED) reemplazable por un profesional

Replaceable control gear by professional / Equipo de control reemplazable por profesional