

FLOS SMART CONTROL APP

User Manual



TABLE OF CONTENTS

IOS APP 2

 INSTALL THE APPLICATION 2

 USING THE FLOS SMART CONTROL APP..... 2

 MAIN SCREEN 3

SCENES 5

 SINGLE POINT SCENES 5

 GROUP SCENES..... 9

TIMER 11

OPTIONS MENU..... 14

 MODULE NAME 15

 PASSWORD 15

 REST CONFIGURATION 15

 SEARCH 15

 ABOUT 15


 CONFIGURATION APLICATION 15

SMART CONTROL APP User Manual

IOS APP

INSTALL THE APPLICATION

For iOS version go to App Store and search for **Smart Control**, Select and Install the App.

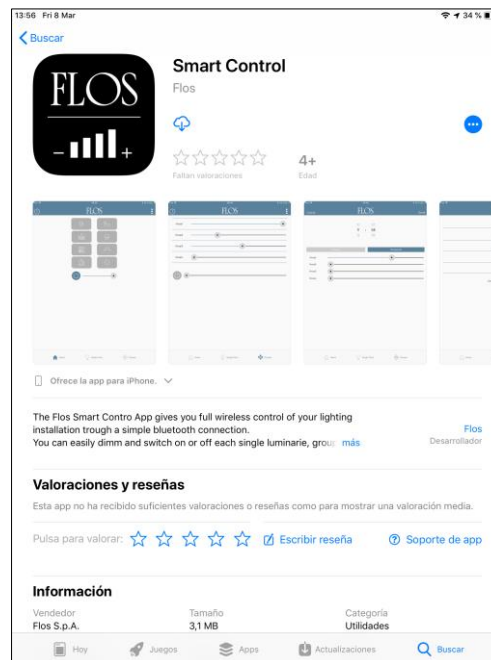

USING THE FLOS SMART CONTROL APP

When you have installed the Smart Control, you will find the following icon on your device's screen:




Launch the application. We will now review its functions and how to use them.


SMART CONTROL APP User Manual

MAIN SCREEN

The first time that you launch the application you have to select the GATEWAY module you wish to connect by tapping on it; this launches the connection between your smart device and the GATEWAY module (the maximum distance for a proper connection is 15 meters).

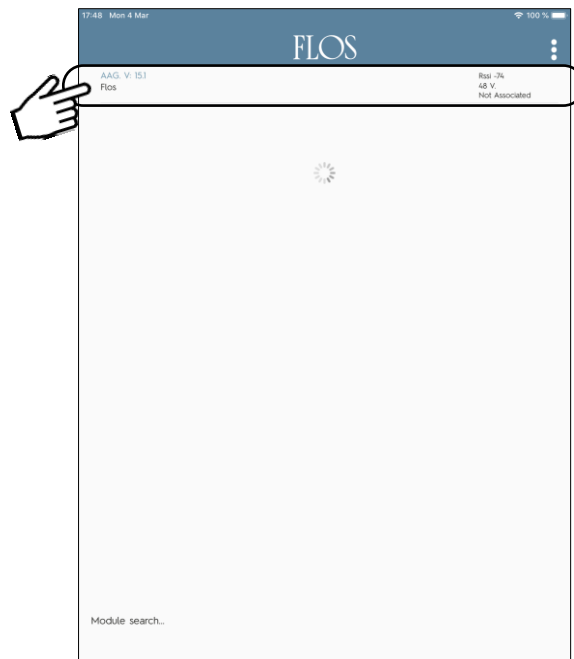


The first time that you connect to a Gateway the App will run a lamps search automatically.

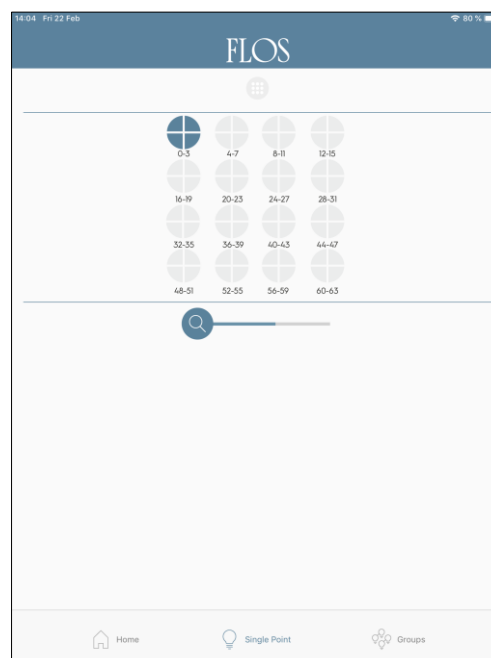

SMART CONTROL APP User Manual

This section presents the main screen (Home) where you can do an ALL ON/ALL OFF in broadcast mode, set-up scenes and access to the rest of functionalities of the Smart Control App.

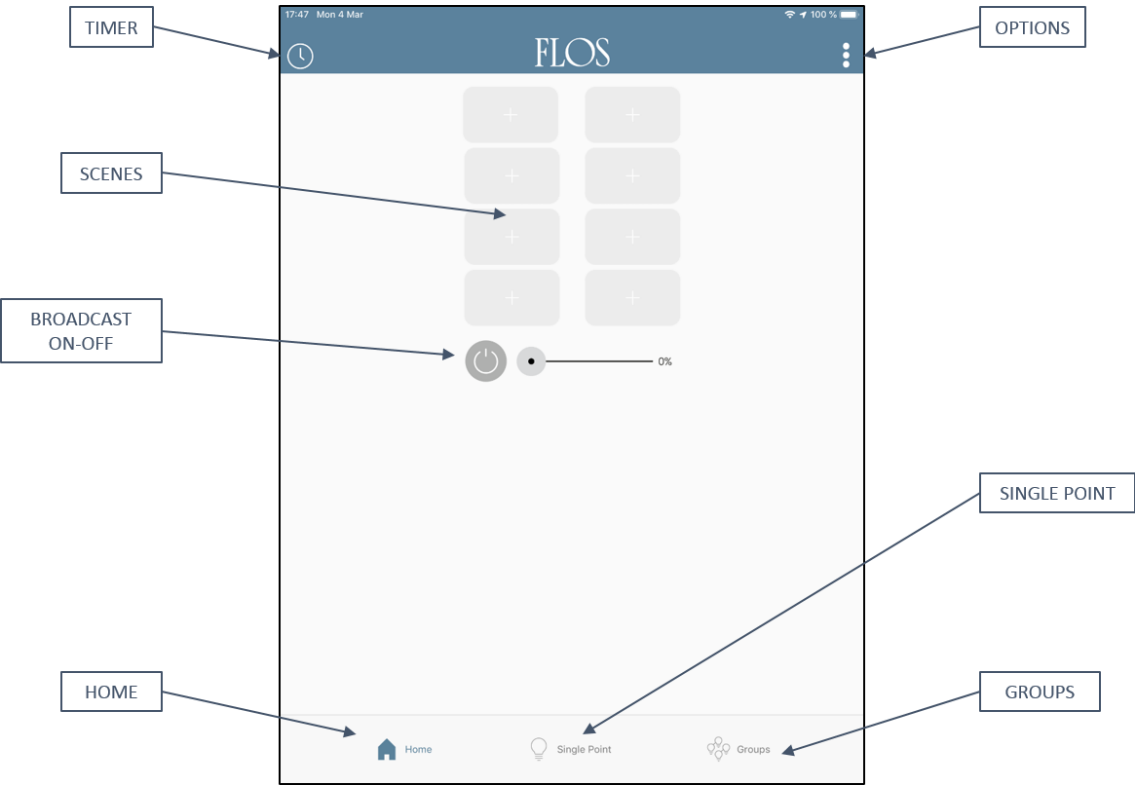


Home	→ Button that give you access to the Home page from any other screen.
Scenes	→ Buttons to save your configuration of lamps. Brightness, lamps on and lamps off. User can save up to 8 scenes.
Broadcast On-Off	→ Button and Slider to do an All ON/All OFF in broadcast mode.
Timer	→ This function give the user the possibility to set-up a timer.
Options	→ This menu gives you access to the Module Name, Password, Reset Configuration, Search, About and Smart Settings App.
Single Point	→ This function gives access to set up the brightness lamp by lamp.
Groups	→ This function gives access to set up the brightness of the 4 groups created in the Smart Settings App.

SMART CONTROL APP User Manual


SCENES

This section explains how to set, save and delete scenes. The user can save up to 8 scenes. Before saving a scene the user must configure the lamps by accessing to the Single Point configuration screen or the Groups configuration screen (it is not possible to save a scene by configuring lamps on Single Point mode and Group mode at the same time).

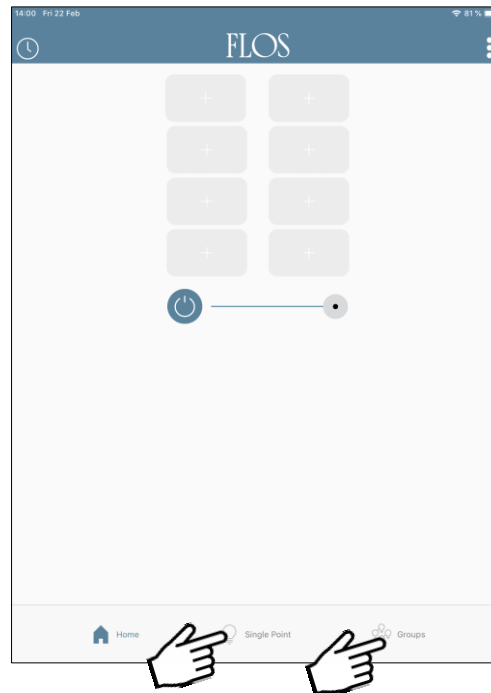


SINGLE POINT SCENES

In the Single Point screen the user can configure the brightness of the lamps individually and switch ON/OFF the four lamps shown in the screen (the screen shows up to 4 lamps).

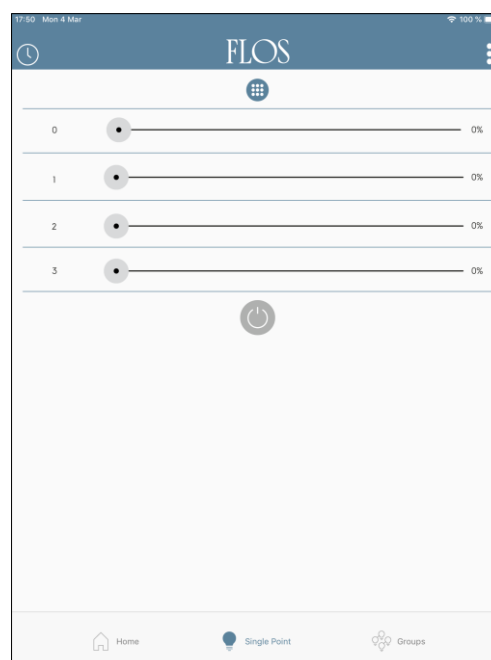


SMART CONTROL APP User Manual

If the user wants to change to other four lamps, user must press the grid button.

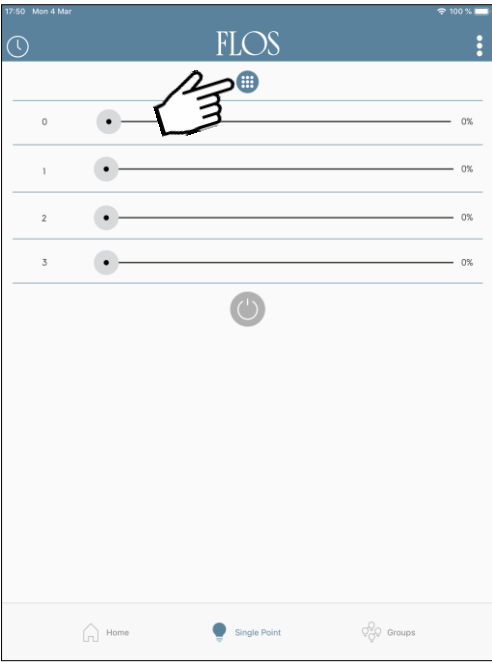

Then press another pie chart with addressed lamps to configure the brightness of the lamps selected. The user will return to the previous screen but it will show the new addressed lamps selected.

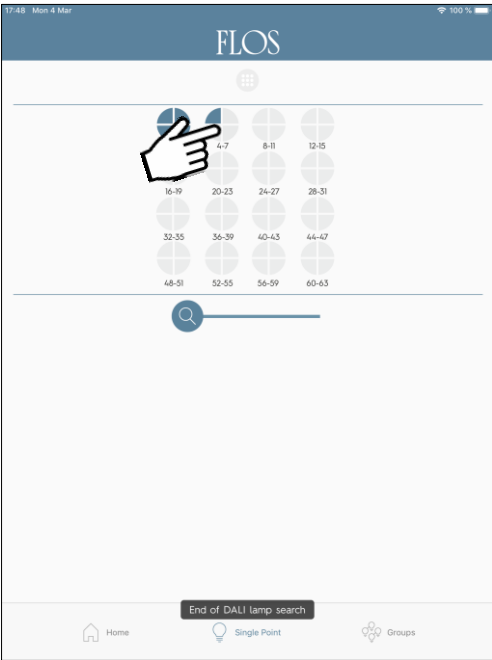


SMART CONTROL APP User Manual


Once the user has configured all the lamps required individually, the user can go to the Home page to save the desired configuration as a Scene.




Press and hold for a few seconds one of the eight scene buttons to have the possibility to select one and then save the configured scene.

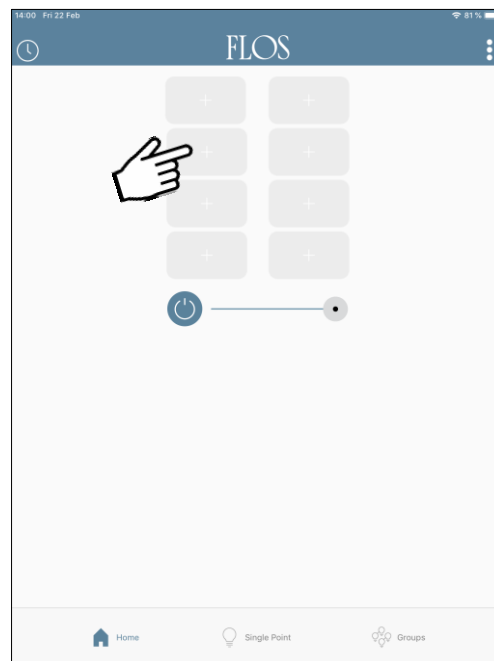

SMART CONTROL APP User Manual

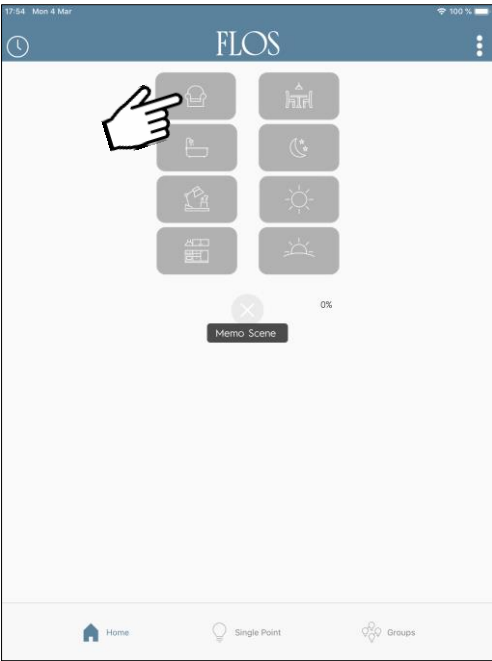


As described previously, the user can create up to 8 scenes. User can move from scene to scene by pressing the scene buttons. The activated scene button will turn from grey to blue.

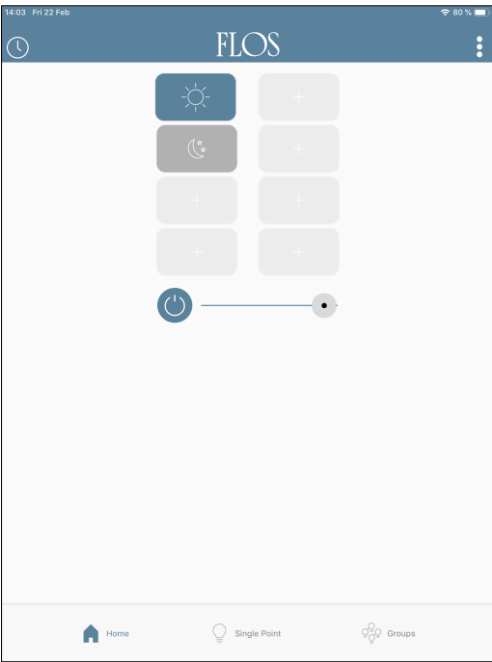


SMART CONTROL APP User Manual

The user can clear a Scene by pressing and holding the button for a few seconds. User then has to follow the instructions shown in the pop-up windows.

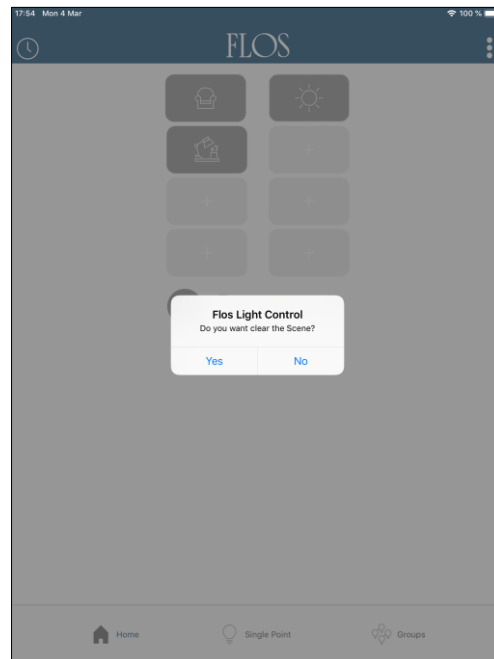


GROUP SCENES

In the Groups screen the user can configure the brightness of the four groups created previously in the Smart Setting App.

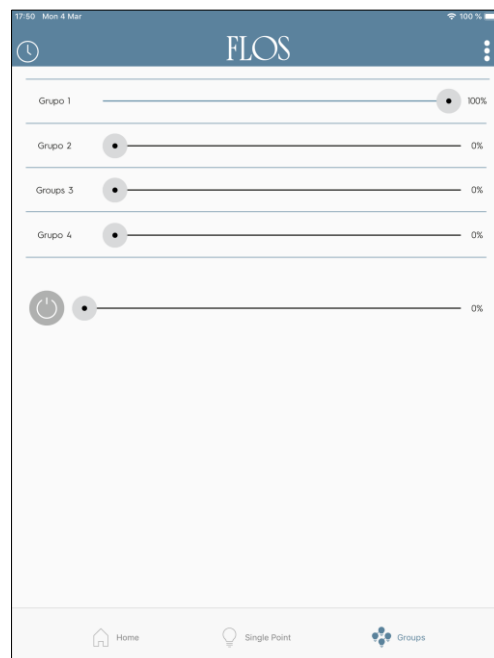


SMART CONTROL APP User Manual

Once the user has configured the groups, the user can go to the Home page to save the desired configuration as a Scene.

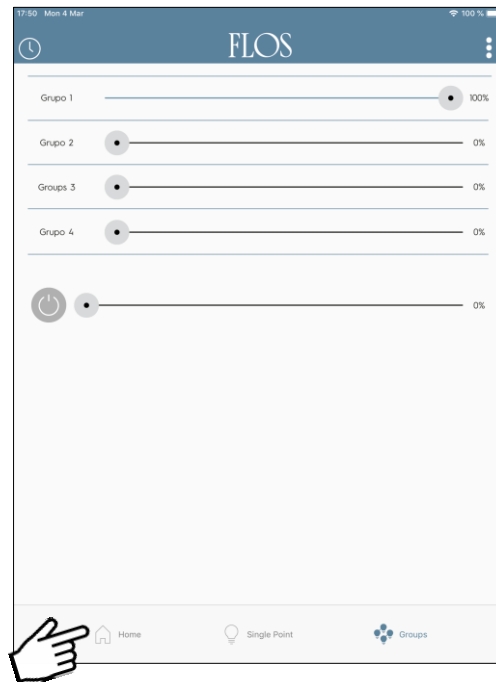

As explained in the section Single Point scenes, press and hold for a few seconds one of the eight scene buttons to have the possibility to select one and then save the configured scene.

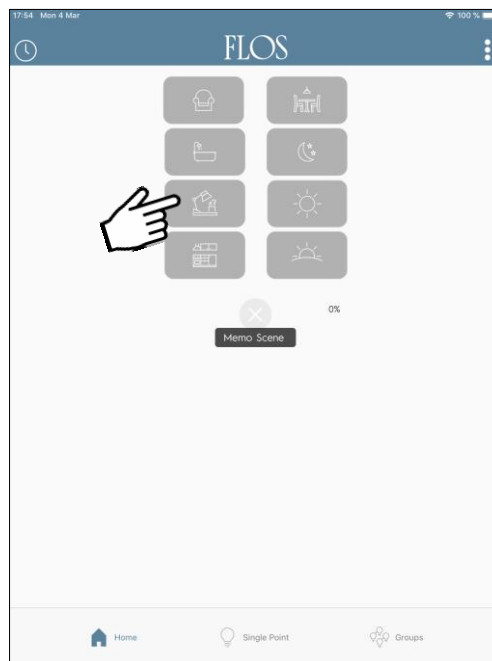


SMART CONTROL APP User Manual

TIMER


This section explains how to configure and manage the Timer. It is important to know that timer works only with the four configured groups in the Smart Setting App.

Note: Timer cannot be associated to a Scene.

To access to the Timer configurator, press the clock button on the left top part of the screen.

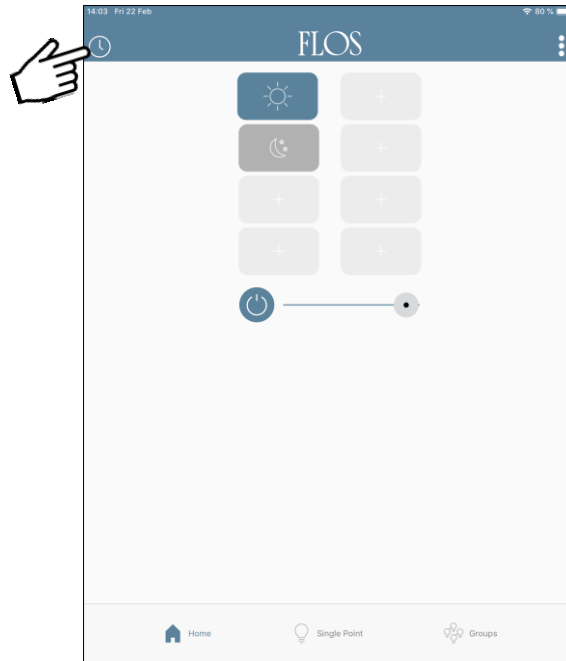


If the user access to the Timer by the first time, user will see the following screen. To add the first timer press the “Add” button.

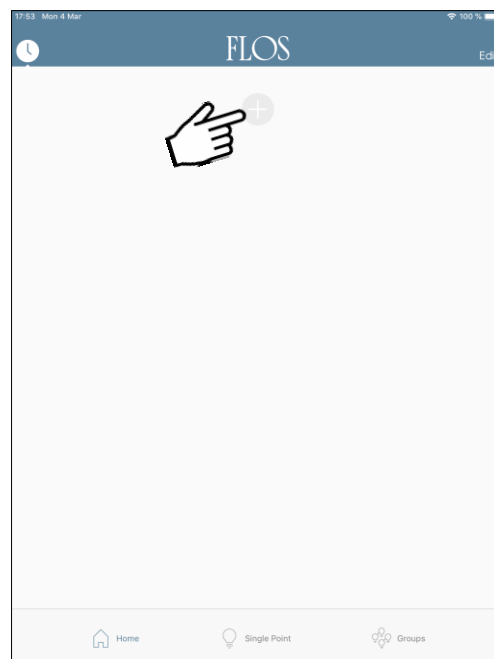


SMART CONTROL APP User Manual

Now the user is in the Timer configuration environment. Configure the brightness of the four groups, establish at what time you want to activate the scene and press “Done” when you are finished.

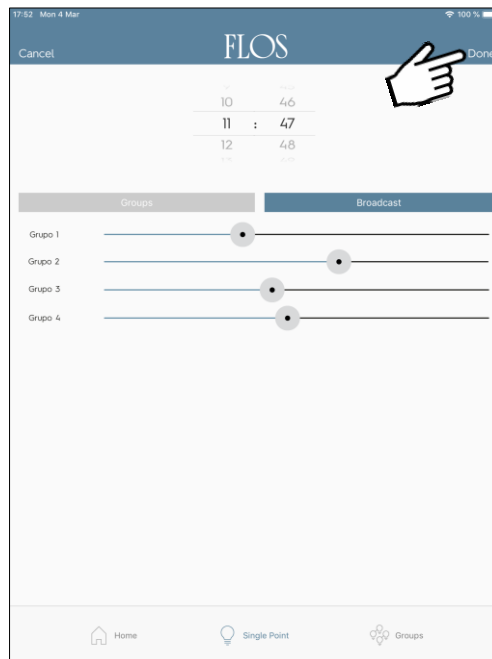


Once the user configured the first timer, the timer screen will look as follow. Now the user can add up to three more timers by pressing the “Add” button.

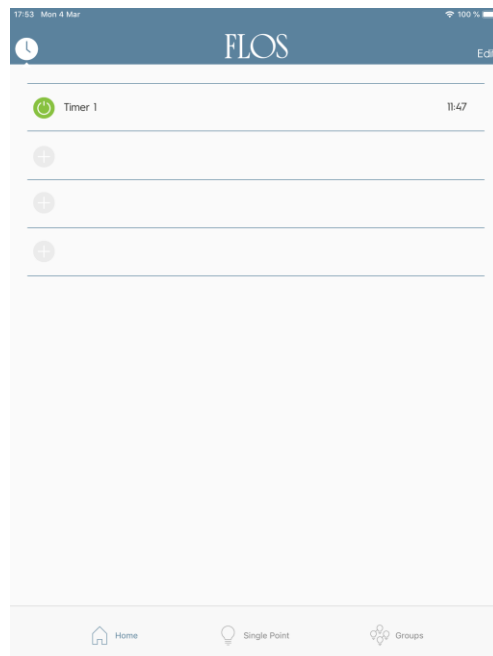


SMART CONTROL APP User Manual

To edit or cancel a timer, user must press the “Edit” button on the right top part of the screen.

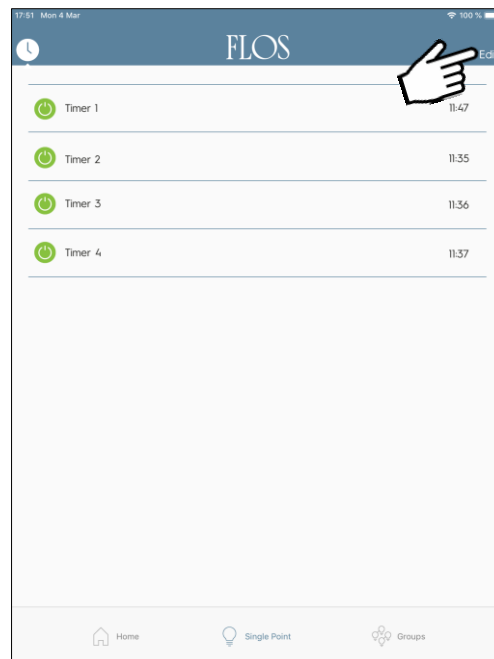



Press the red button to eliminate the timer or the time to edit the brightness of the groups and the time of the timer.

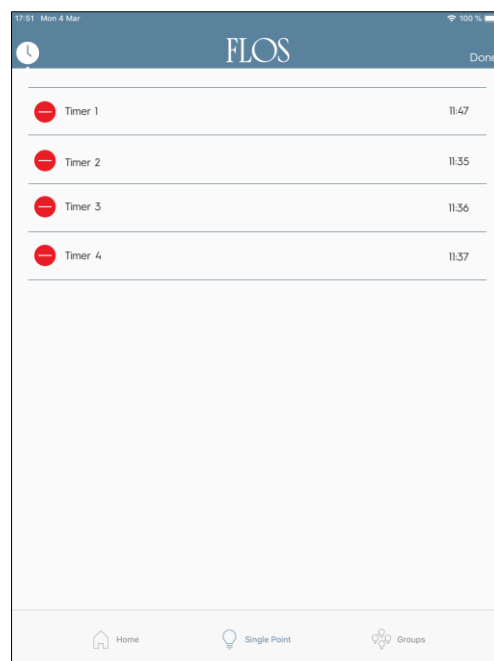

SMART CONTROL APP User Manual

OPTIONS MENU

The user has access to other options by pressing the three dots button on the right top part of the screen.

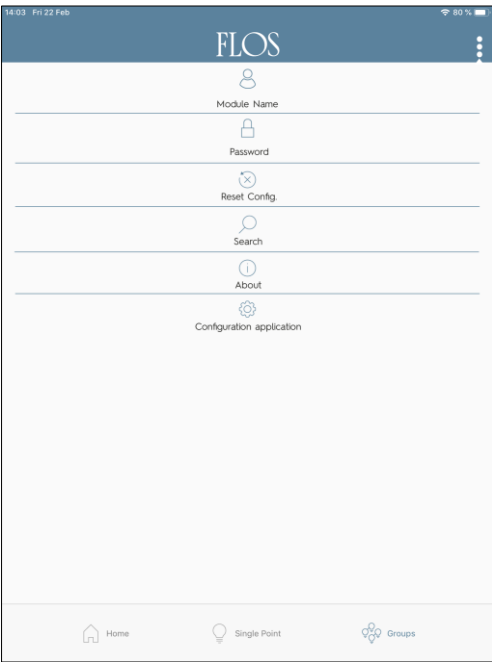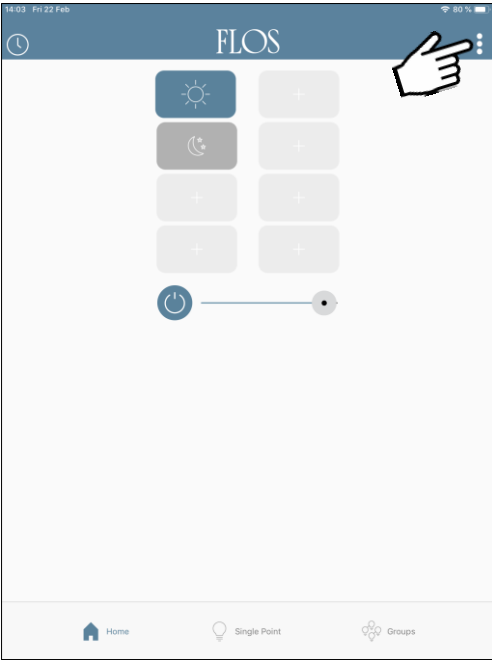

SMART CONTROL APP User Manual

MODULE NAME

With this option the user can change the name of the Gateway



PASSWORD

With this option the user can change the password.



RESET CONFIGURATION

With this option the user will disconnect from the Gateway in order to have the possibility to connect to another the Gateway. If the user disconnect from the Gateway the App will close automatically.



SEARCH

This option allows the user to search the lamps linked the Gateway.



ABOUT

This option shows the version of the App.



CONFIGURATION APPLICATION

This option will run the Smart Settings App (the use of the Smart Setting App is not covered on this User Manual).

