

**RF01438**

Parentesi inox turnbuckle &amp; grub screw



WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

## RF01438

Parentesi inox turnbuckle & grub screw

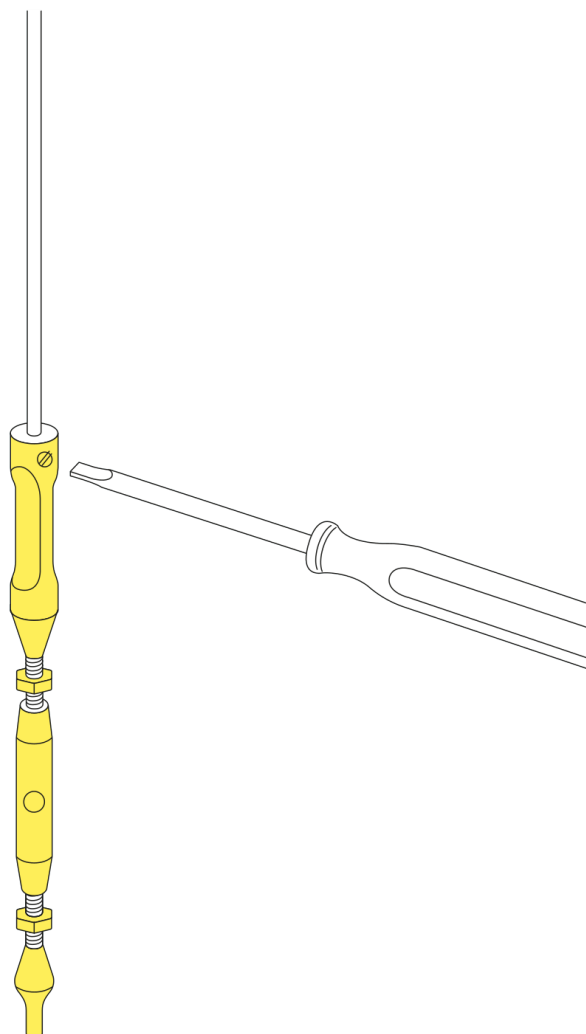


Fig.1

Insert the end point of the steel cable into the upper hole of the turnbuckle and then fasten the locking screw.

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

**RF01438**

Parentesi inox turnbuckle &amp; grub screw

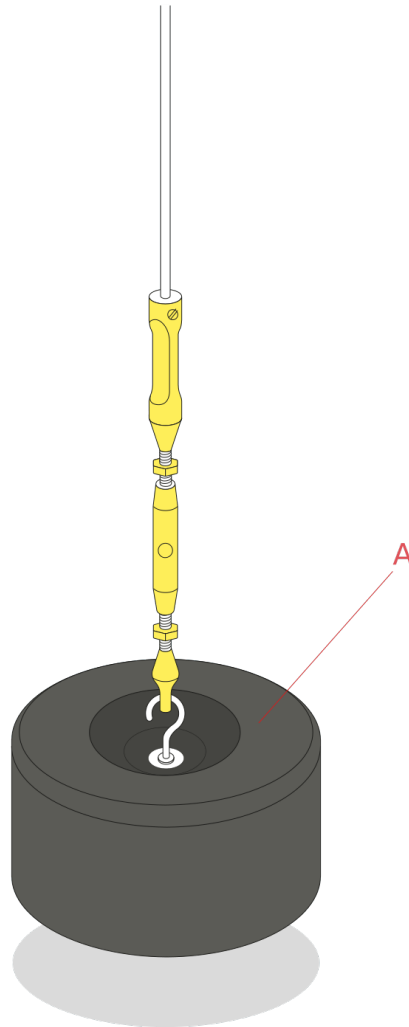


Fig.2

Hook the turnbuckle to the counterweight (A).

Regulate the turnbuckle in a way that the counterweight (A) almost touches the floor and then fasten the locking bolts. Verify that the suspension wire is perpendicular.

**WARNING!** Lifting up the counterweight will cause mechanical tension loss of the suspension wire, causing the tube and lamp support to fall down.

**WARNING!** When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.