



TO AVOID SHADOWS IN THE CORNERS, INSTALL LED MODULES IN THE OPPOSITE DIRECTION AS SHOWN BELOW



USO 100 50, USO 140 90 & USO 900

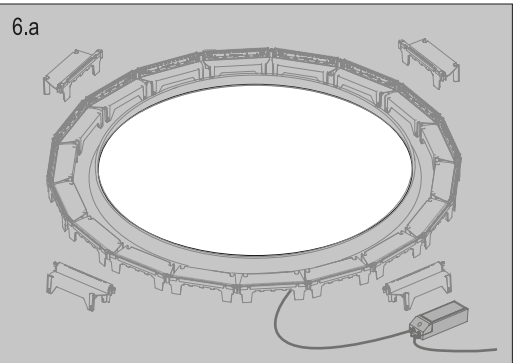


USO 1700

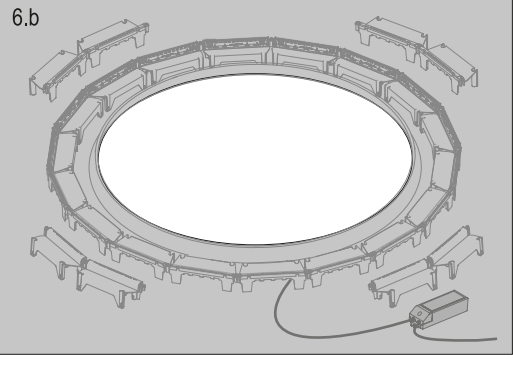


USO 2200 & USO 2500

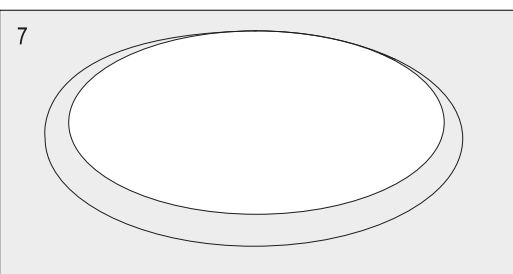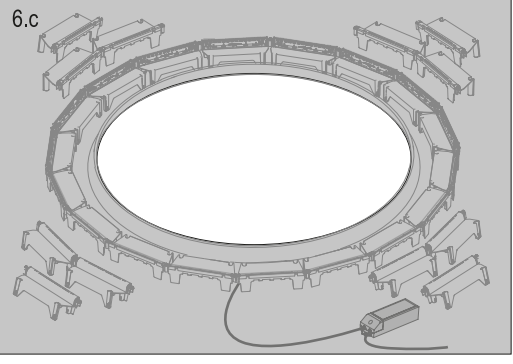


NOTE 1. Secondary connection detail

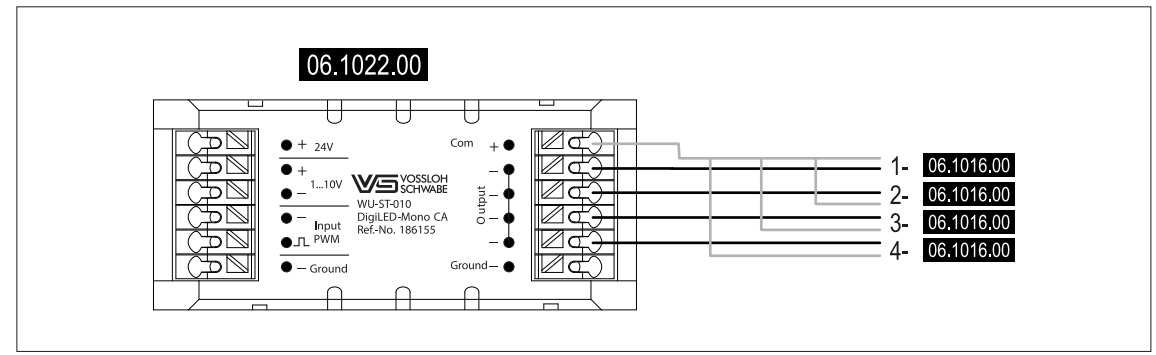


C CONNECTION DIAGRAM LED WHITE NOT DIMMABLE

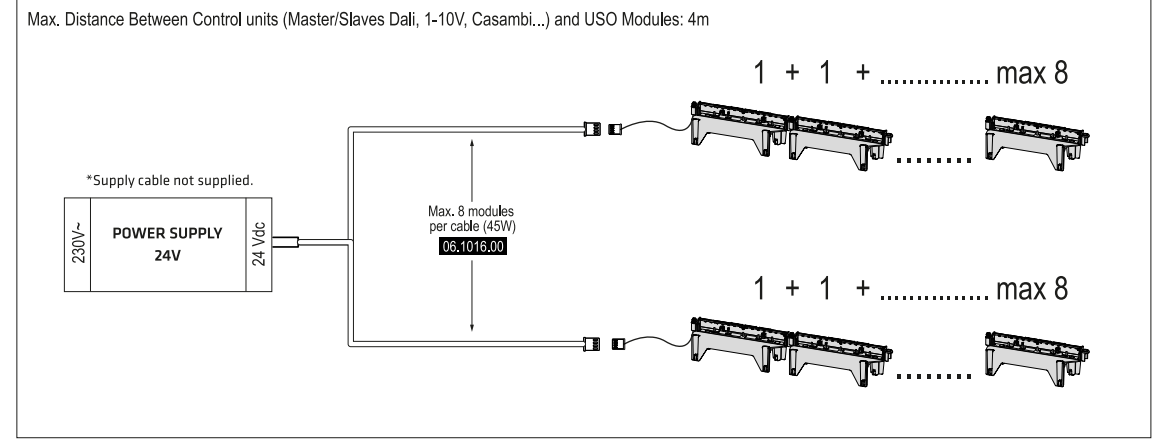


D CONNECTION DIAGRAM LED WHITE DIMMABLE 1-10V

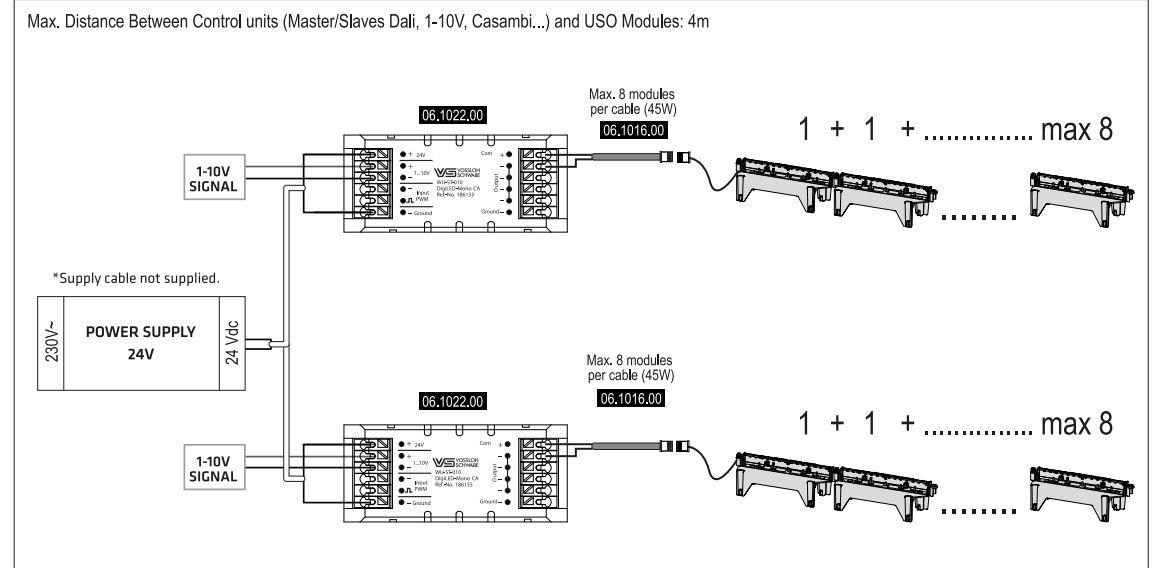


E CONNECTION DIAGRAM LED WHITE DIMMABLE DALI (USO 100 50, USO 140 90, USO 900)

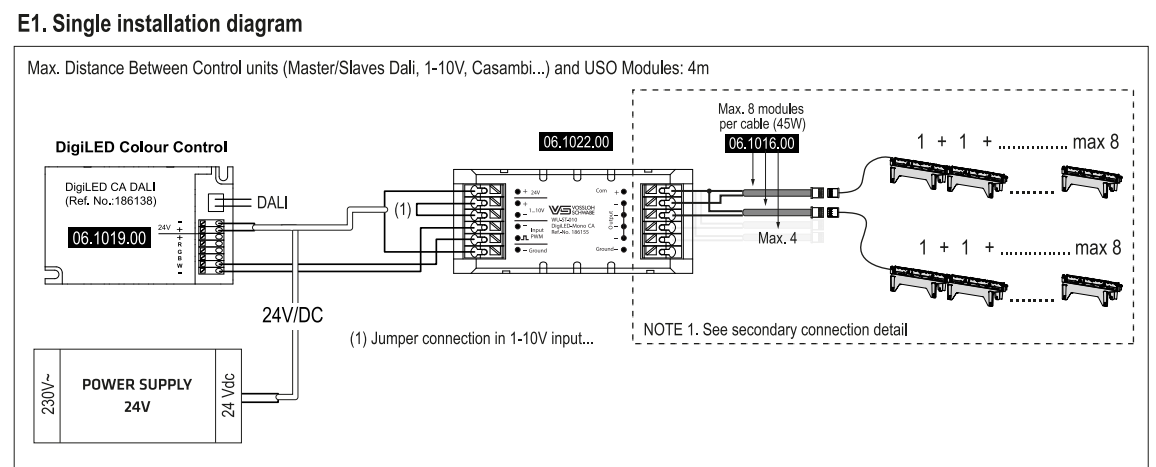


E2. Group installation diagram

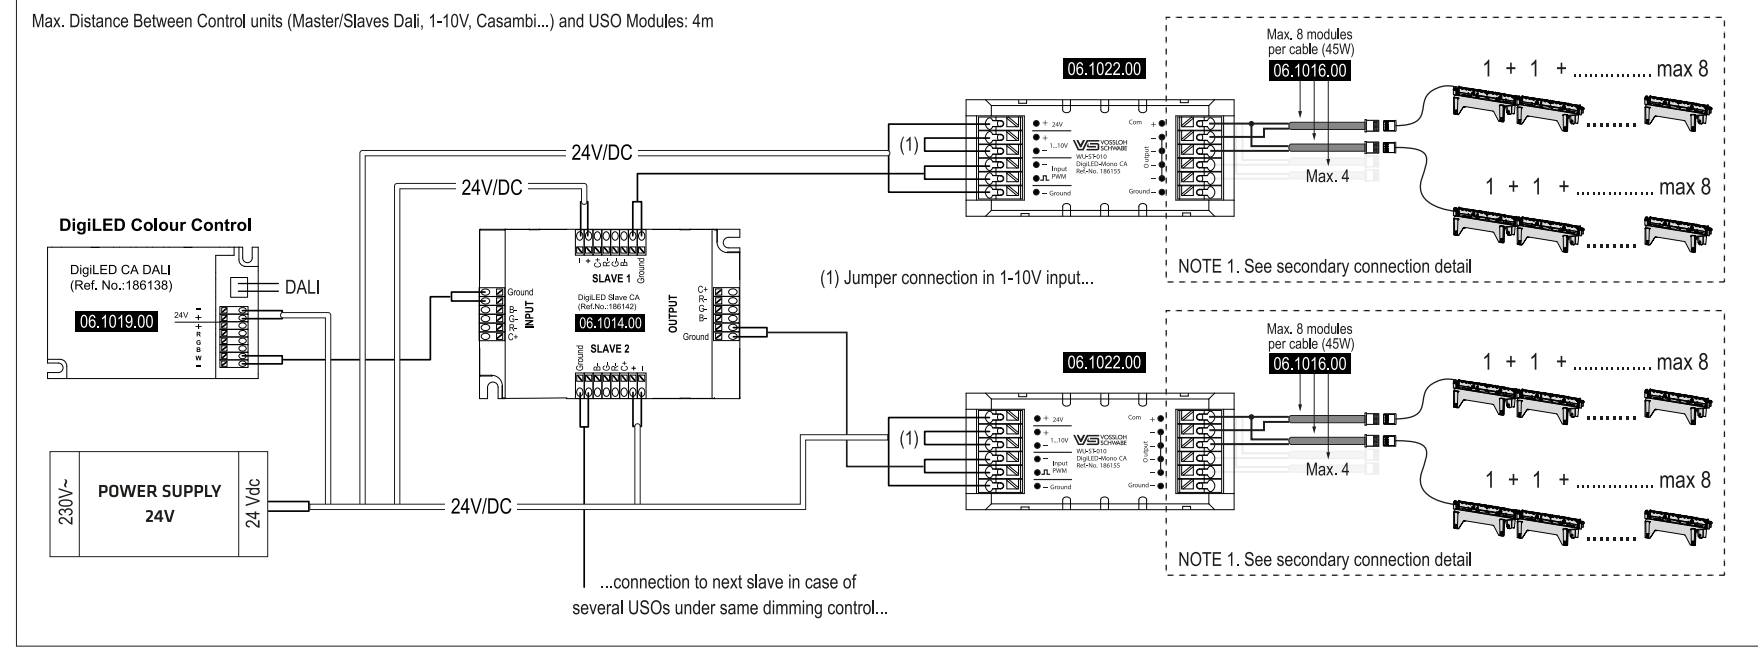


F CONNECTION DIAGRAM LED WHITE DIMMABLE DALI (USO 1700, USO 2200, USO 2500 or more than USO in the installation)

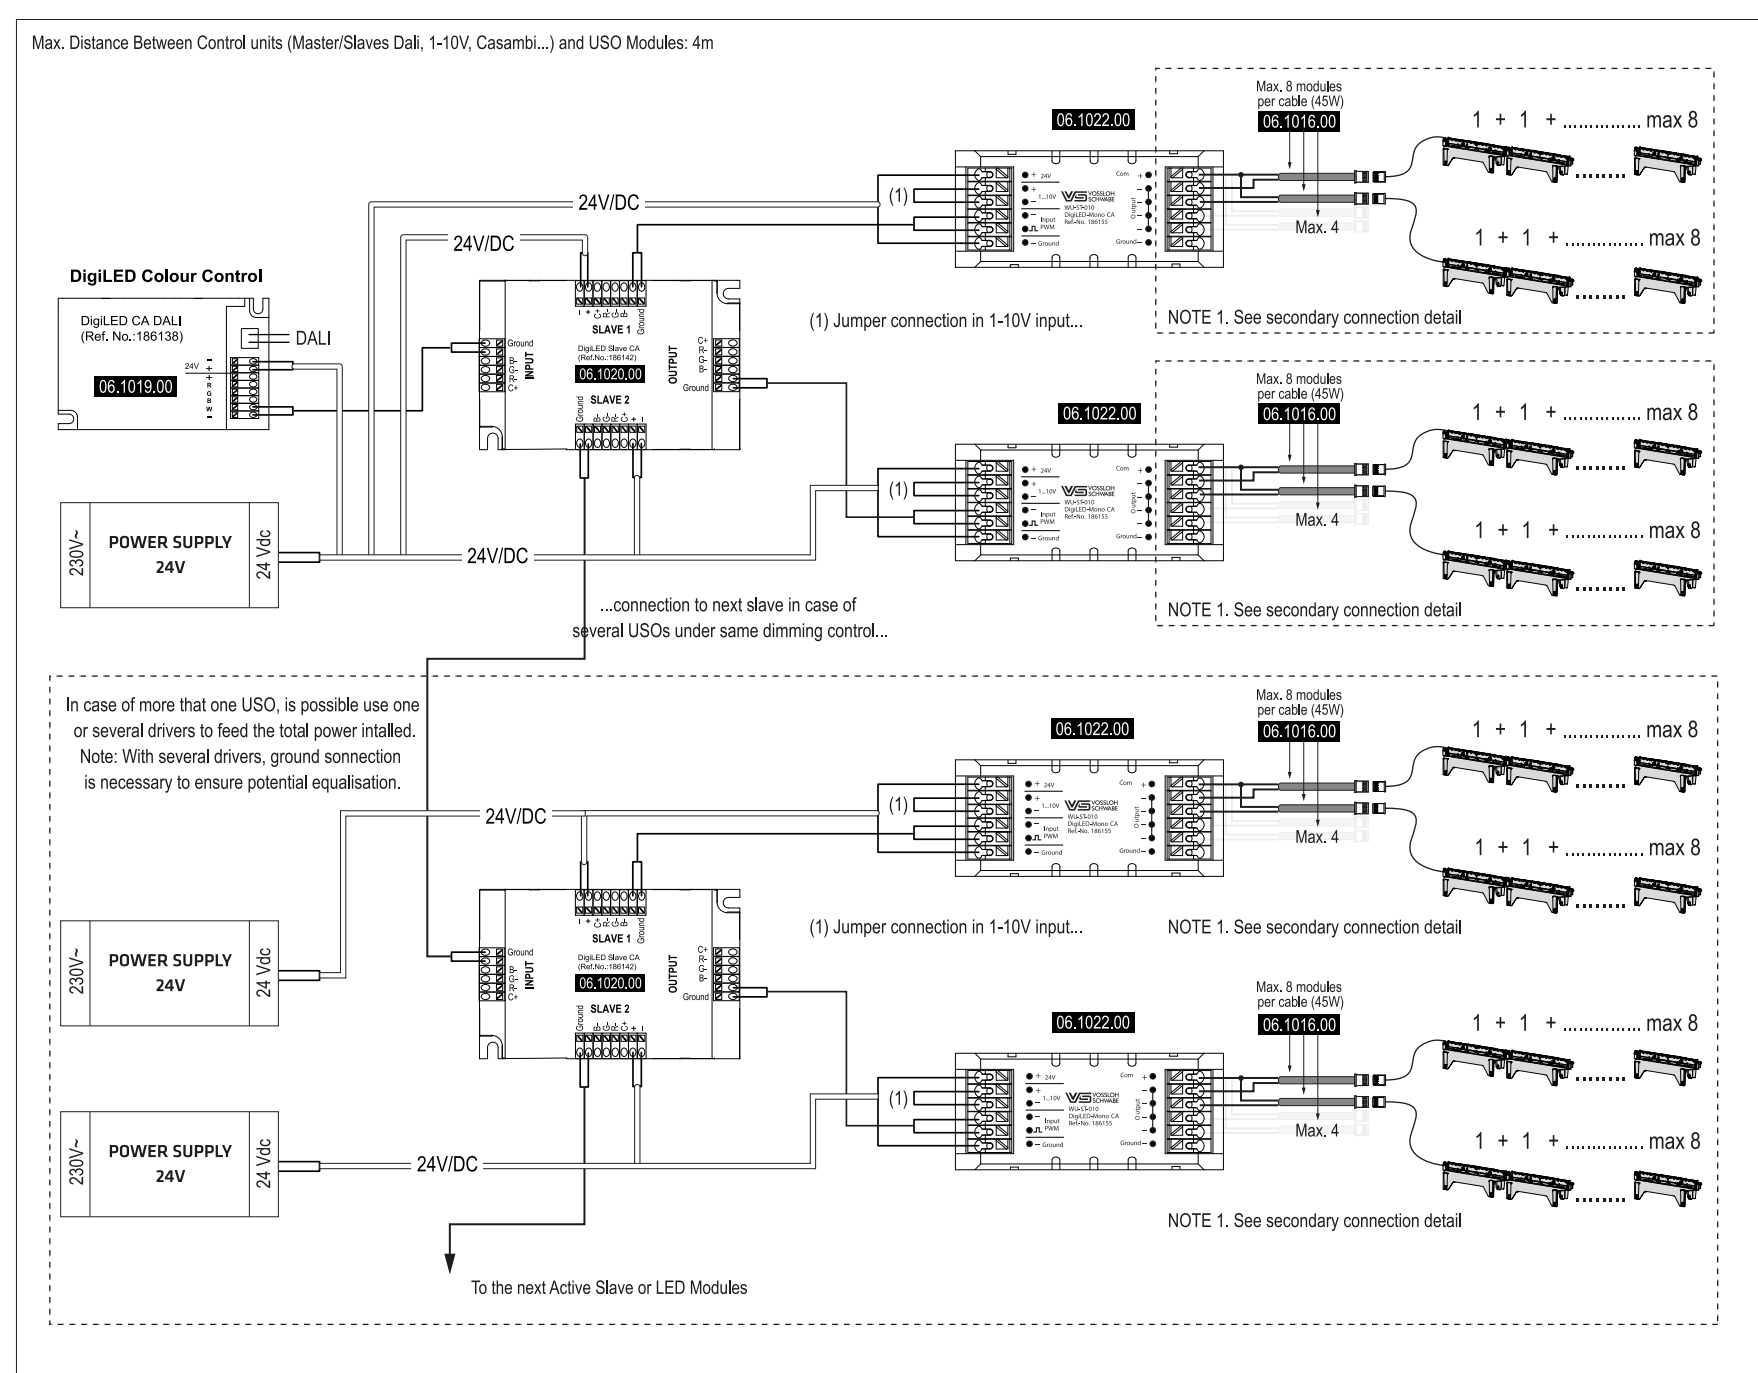


G CONNECTION DIAGRAM LED RGB (USO 100 50, USO 140 90, USO 900)

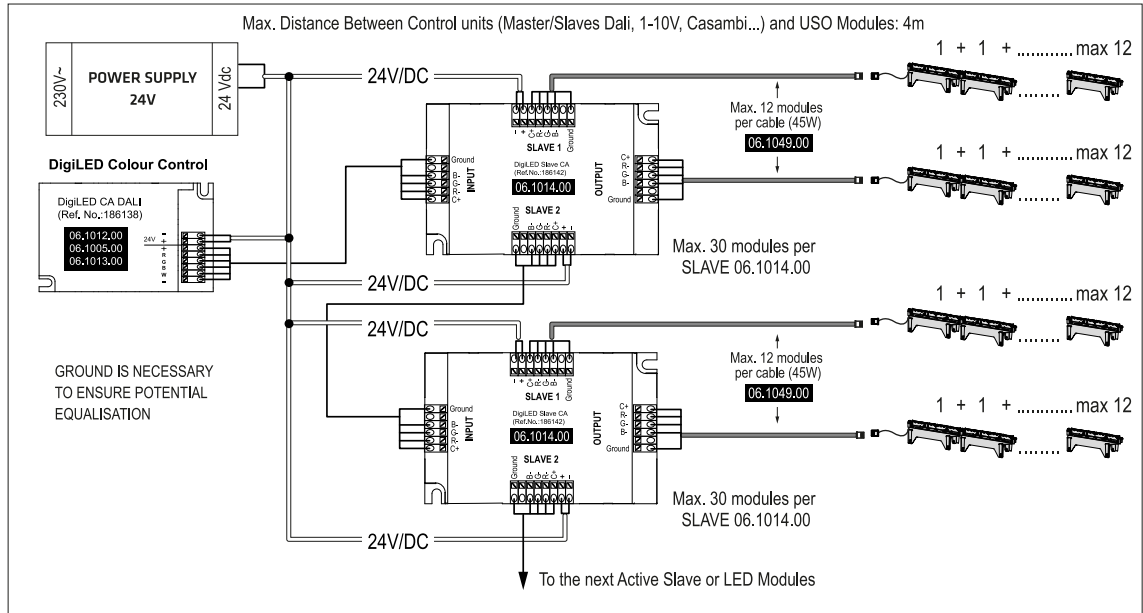

H CONNECTION DIAGRAM LED RGB (USO 1700, 2200, 2500)

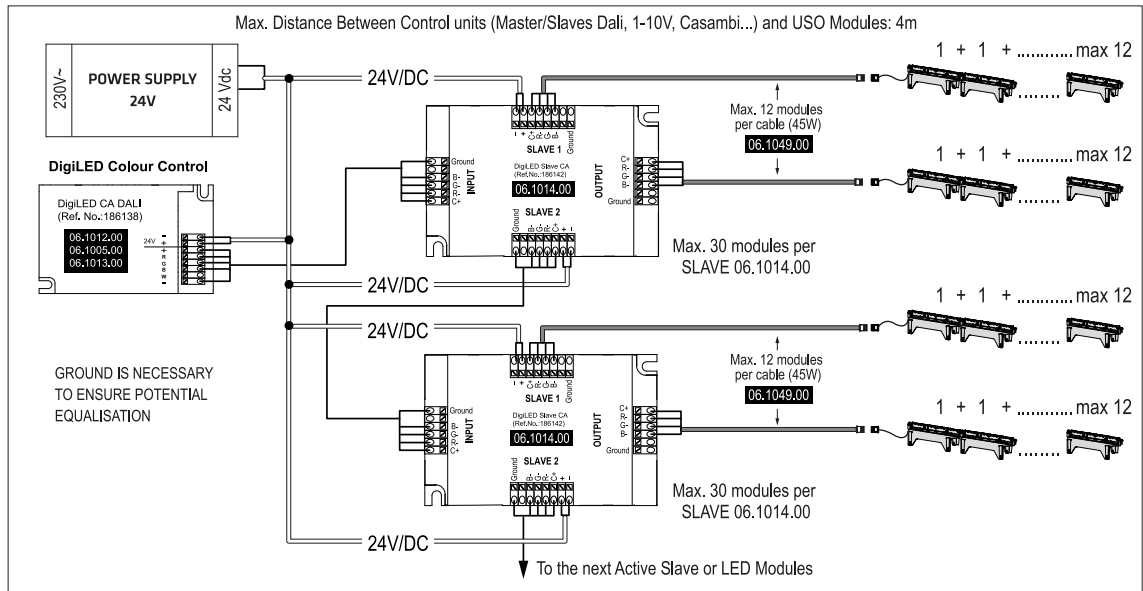

I CONNECTION DIAGRAM LED WHITE DIM CASAMBI

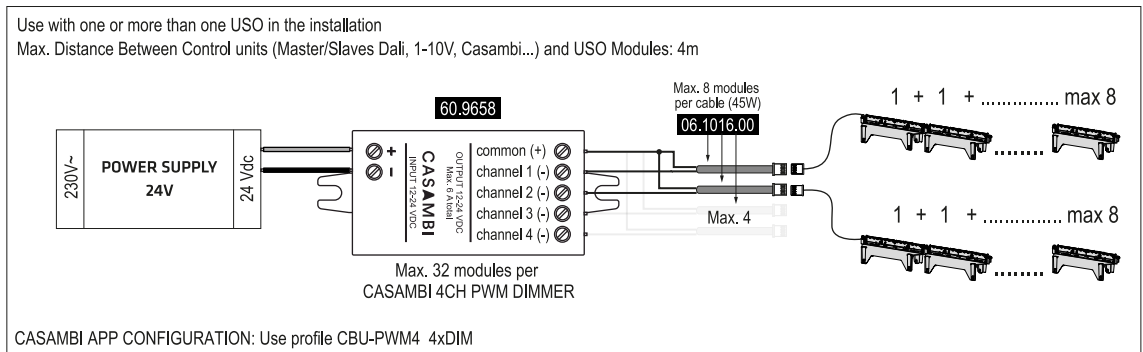

J CONNECTION DIAGRAM LED RGB DIM CASAMBI

