


Minimum clearance diameter for overlaying material
Diámetro libre mínimo para material superpuesto.









ECLECTIC 70 ADJ: 130mm
ECLECTIC 90 ADJ: 170mm

MODEL	I (mA)
ECLECTIC 70 FIX SP-MD-FL	600
ECLECTIC 70 ADJ SP-MD-FL	600
ECLECTIC 90 FIX SP-MD-FL-WF	275
ECLECTIC 90 ADJ SP-MD-FL-WF	275
ECLECTIC 90 FIX PW SS-SP-MD	600
ECLECTIC 90 ADJ PW SS-SP-MD	600




B LUMINAIRE INSTALLATION

INSTALACIÓN DE LA LUMINARIA / INSTALLAZIONE DELLA LAMPADA /
INSTALLATION DER BELEUCHTUNG / INSTALLATION DU LUMINAIRE /
INSTALAÇÃO DO APARELHO DE ILUMINAÇÃO / 照明器具の設置・据付け /
灯具的安装 / МОНТАЖ ОСВЕТИТЕЛЬНОГО ПРИБОРА /
شامدلدى ornаты / تركيب وحدة الإنارة


NO TRIM

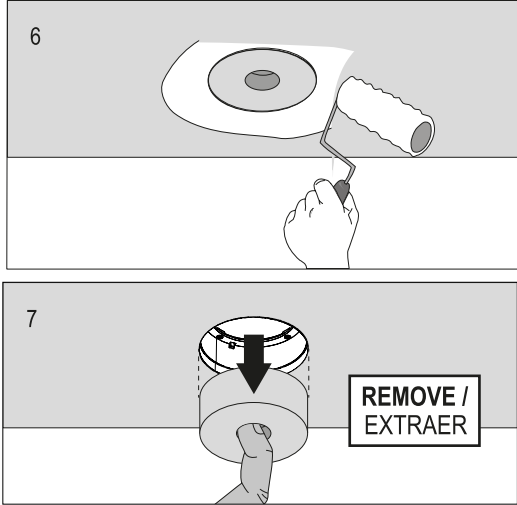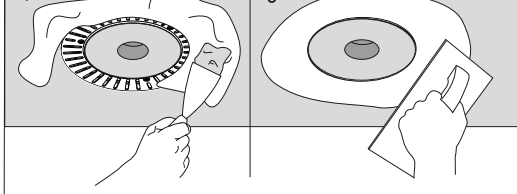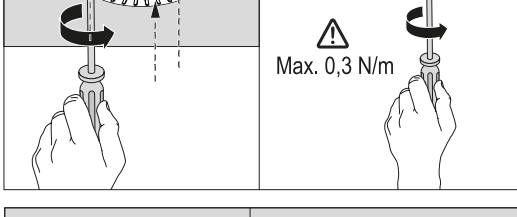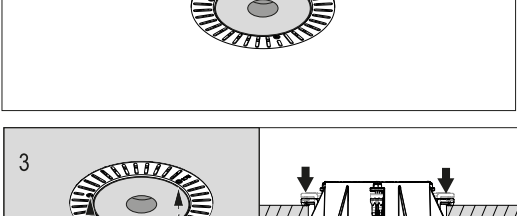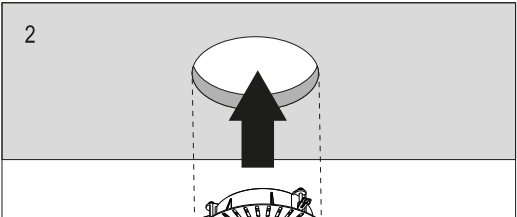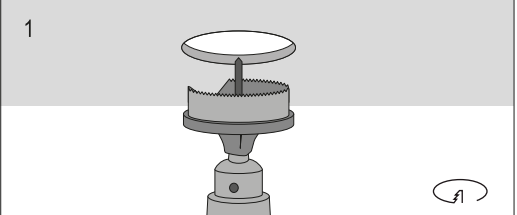

TRIM

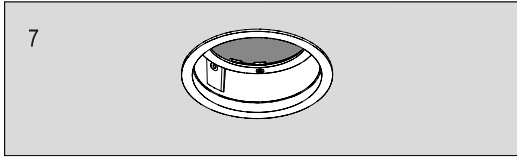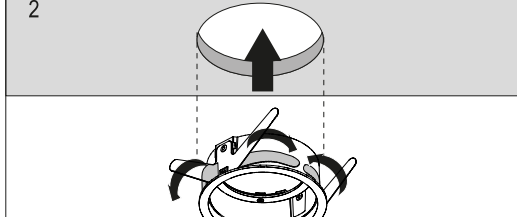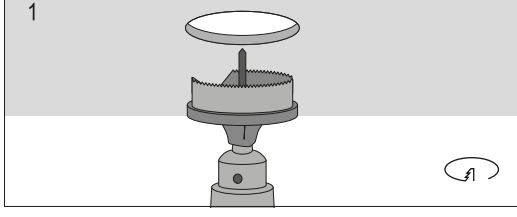

FIXED / ADJUSTABLE

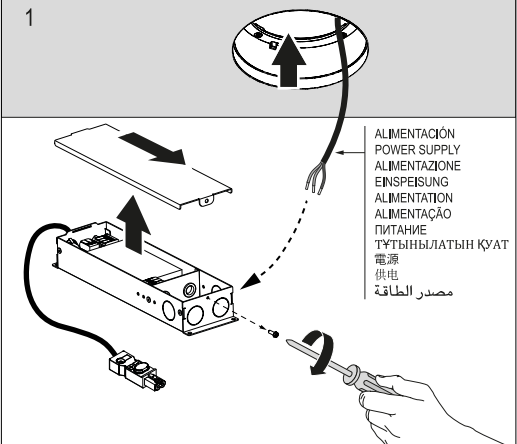

PHASE DIMMING

WARNING / ATENCIÓN!
L → L L = Phase for dimming
N → N Fase para dimado

Connect Line volt building power to driver
input 120V - 50/60Hz
Conectar la línea de luz al driver tensión
120V-50/60hZ




DIMMING 1-10V / DALI REF.: XX,XXXX,UL7U

WARNING / ATENCIÓN!
L → L
N → N




Connect Line volt building power to driver
input 120/277V - 50/60Hz
Conectar la línea de luz al driver tensión
120/277V-50/60hZ

D1 / D2
+ / -

Connect Dimming wires
from driver to control wires.
Conectar cables de dimado
desde el driver al control de
cables.

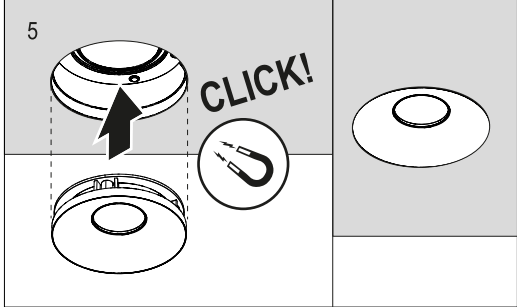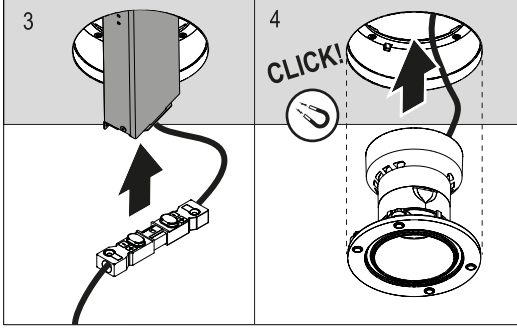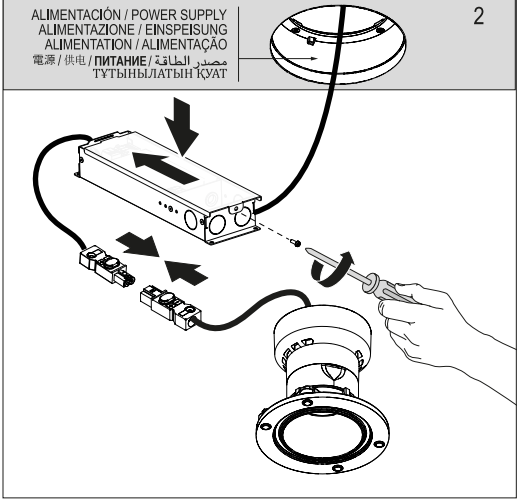


TO REMOVE / PARA EXTRAER

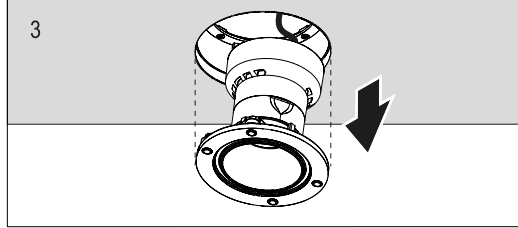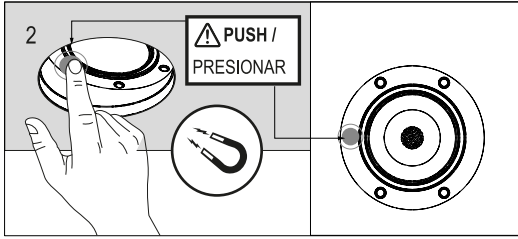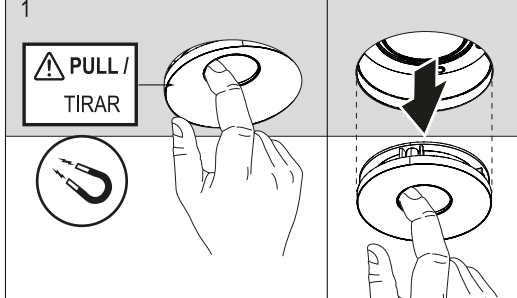


C TILT AND LOCKING ADJUSTMENT

REGULACIÓN DE LA INCLINACIÓN Y BLOQUEOS / REGOLAZIONE
DELL'INCLINAZIONE E BLOCCHI / NEIGUNGSREGLER UND SPERREN /
RÉGLAGE DE L'INCLINAISON ET VERROUILLAGES / REGULAÇÃO DA
INCLINAÇÃO E BLOQUEIOS / 角度調節と固定 / 调节倾斜度和锁定
裝置 / РЕГУЛИРОВКА НАКЛОНА С ФИКСАЦИЕЙ / ЕВКЕИТУДІ ЖӘНЕ
БЛОКАУЛАУДЫ РЕТТЕУ ضبط الإمالة والكيح

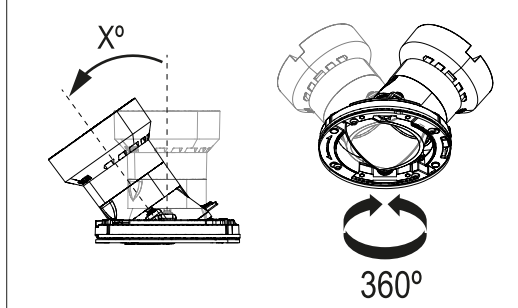

Light Sniper 70 X = 35°
Light Sniper 90 X = 40°



WARNING / ATENCIÓN: Don't touch the lens
with your finger / No toque la lente con el dedo.

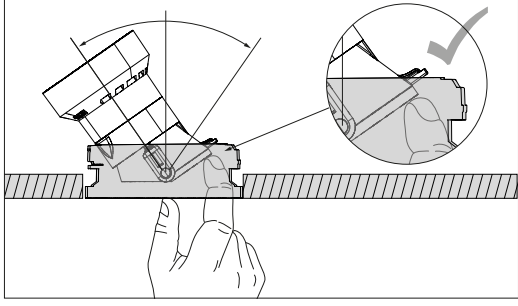






D ACCESSORIES
ACCESORIOS / ACCESSORI / ZUBEHÖR / ACCESSOIRES /
ACCESSÓRIOS / アクセサリー / 配件 / AKCECCYARY /
الامسوارات / KEPEK-JAPARATAP

CHANGE SPARE


FLAT 70 BL : 08.0723.14 FLAT 70 WH : 08.0723.40 FLAT 90 BL : 08.0726.14 FLAT 90 WH : 08.0726.40
CONE 70 BL : 08.0721.14 CONE 70 WH : 08.0721.40 CONE 90 BL : 08.0724.14 CONE 90 WH : 08.0724.40
SOFT 70 BL : 08.0722.14 SOFT 70 WH : 08.0722.40 SOFT 90 BL : 08.0725.14 SOFT 90 WH : 08.0725.40

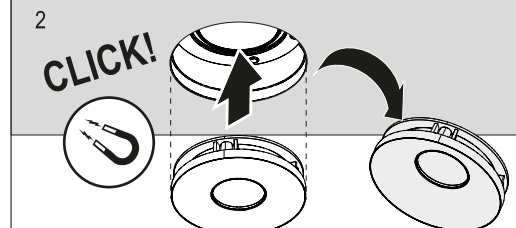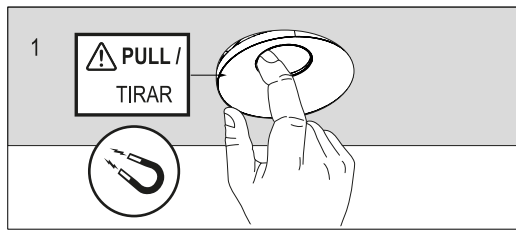



CHANGE LENS

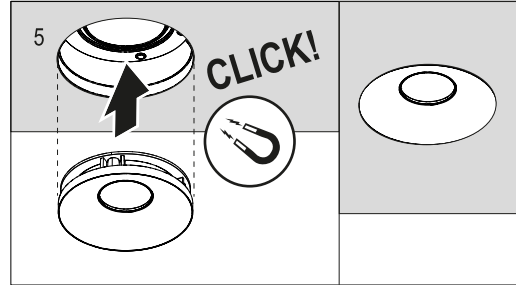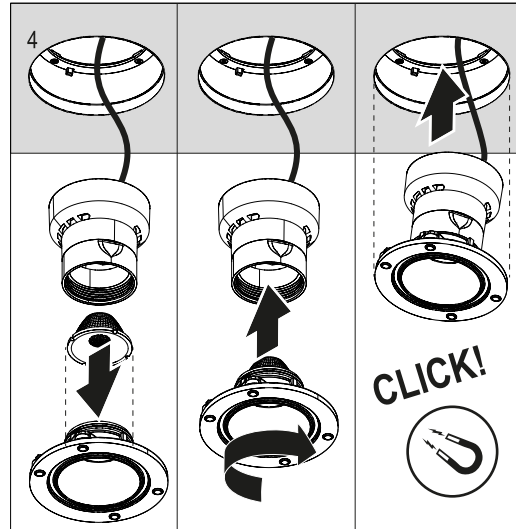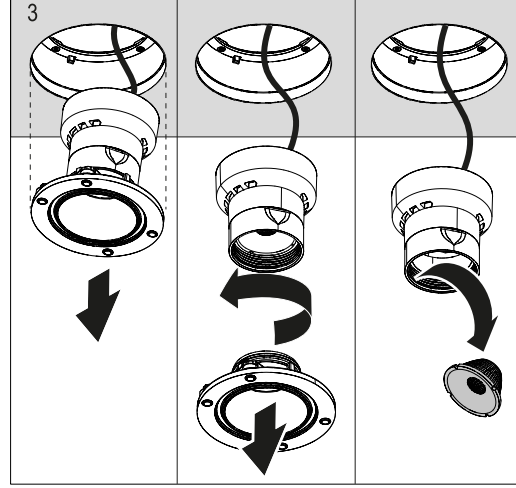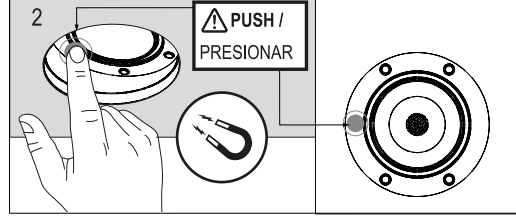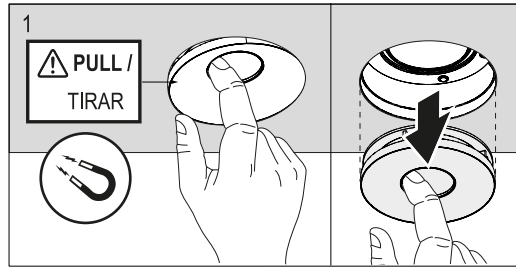


IP 54 ACCESSORY

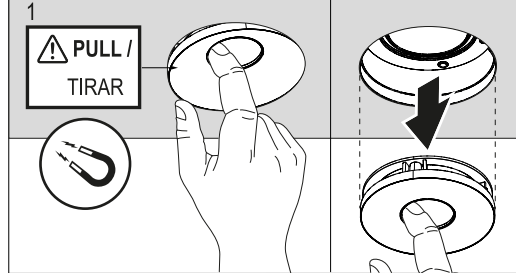


Eclectic 70 Ref: 08.0729.00
Eclectic 90 Ref: 08.0730.00

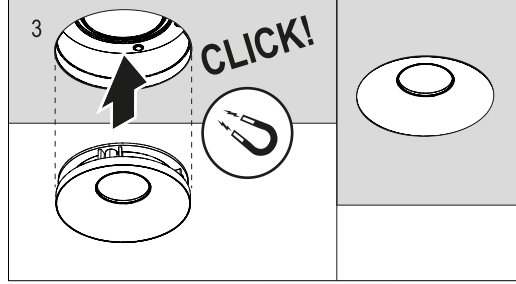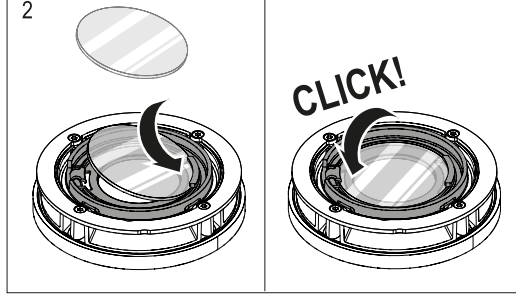

REMOVE IP VERSION

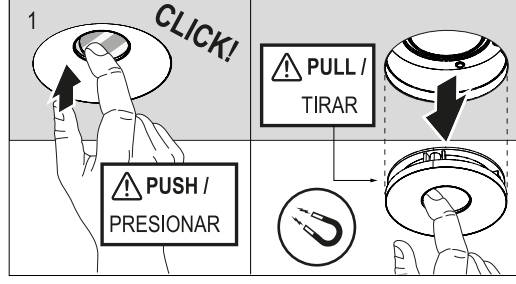


COLOR CORRECTION

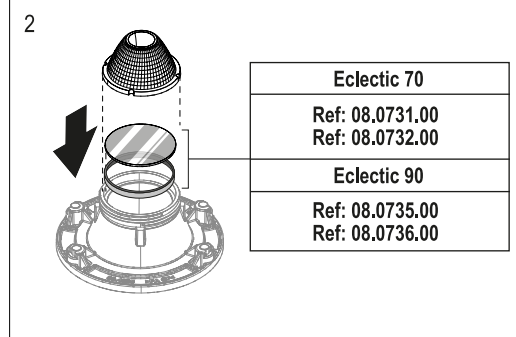



HONEYCOMB

Eclectic 70 Ref: 08.0727.00
Eclectic 90 Ref: 08.0728.00


COLOR CORRECTION + HONEYCOMB

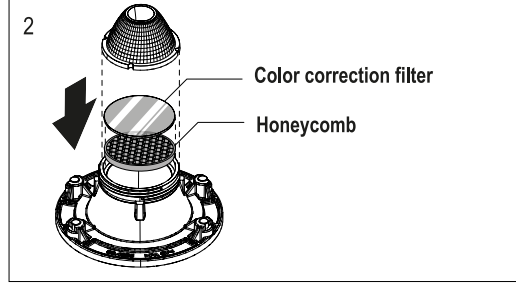

CHANGE POWER LED LENS

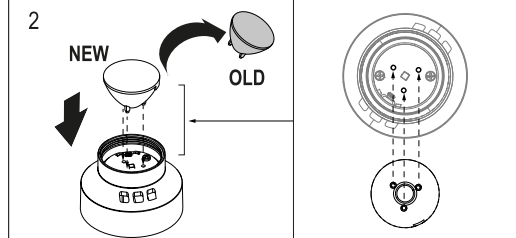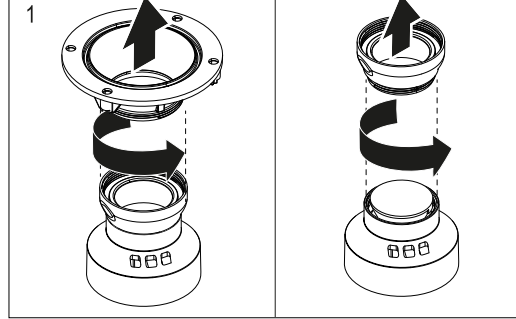

Align dots / Alinear puntos

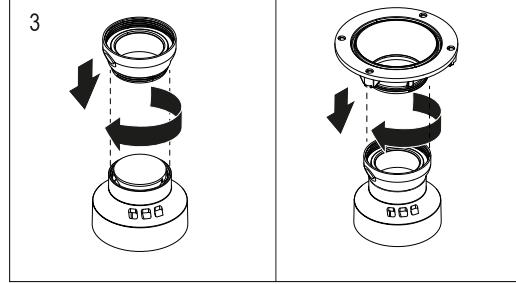

Cable Section / Sección del cable

Conductor	Section Min / Sección Min 0,75 mm² / AWG 18

WARNING!

Calculate the total power of system output by applying a
safety coefficient of +15% without exceeding the driver's
full potential. Calcule la potencia total de salida del sistema
aplicando un coeficiente de seguridad de + 15% sin exceder el
potencial total del controlador.

Replaceable (LED only) light source
by a professional / Fuente de luz (solo
LED) reemplazable por un profesional

Replaceable control gear by professional
/ Equipo de control reemplazable por
profesional

CLASIFICACION ENERGÉTICA

ENERGY CLASSIFICATION

70 FIX 27K 70 ADJ 27K	G
70 FIX 30K 70 ADJ 30K	F
90 FIX 27K 90 ADJ 27K 90 FIX 30K 90 ADJ 30K	
90 FIX 27K PW 90 ADJ 27K PW 90 FIX 30K PW 90 ADJ 30K PW	