

ΕN

RF23023

Counterweight



ΕN

RF23023

Counterweight

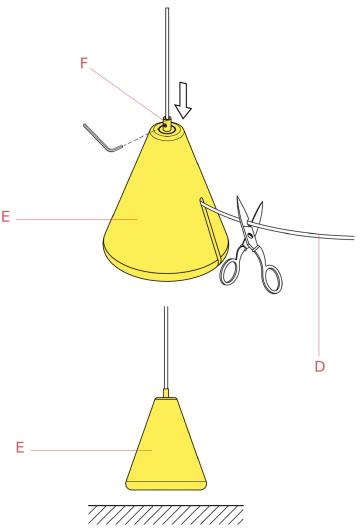


Fig.1

Pass the steel wire (D) through the counterweight (E) and run it through until the counterweight remains slightly suspended above the floor, then lock the wire by tightening the screw (F) and cut off the excess wire. WARNING! Lifting up the counterweight will cause mechanical tension loss of the suspension wire, causing the lamp fixture to fall down.