

RF35320

Black Flag down 2700°K stripe assembly



WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - www.flos.com
Flos reserves the right to introduce any changes to its own models, without prior notice.

RF35320

Black Flag down 2700°K stripe assembly

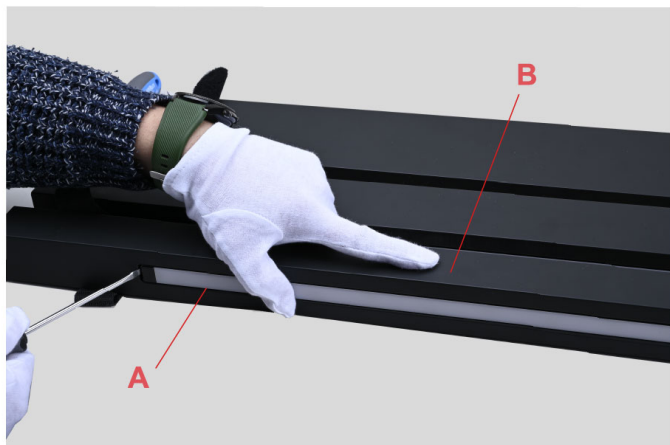


Fig.1



Fig.2

Fig. 1: Using a flat screwdriver, lift the LED diffuser (A) from the lamp body (B).

Fig. 2: Remove the LED diffuser from the lamp body.

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - www.flos.com
Flos reserves the right to introduce any changes to its own models, without prior notice.

RF35320

Black Flag down 2700°K stripe assembly



Fig.3



Fig.4

Fig. 3: Using a cross-head screwdriver, unscrew the black screws inside the lamp body.

Fig. 4: Using a magnet (purchasable as a spare if not available) remove the metal cover to access the internal area of the lamp body.

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

RF35320

Black Flag down 2700°K stripe assembly

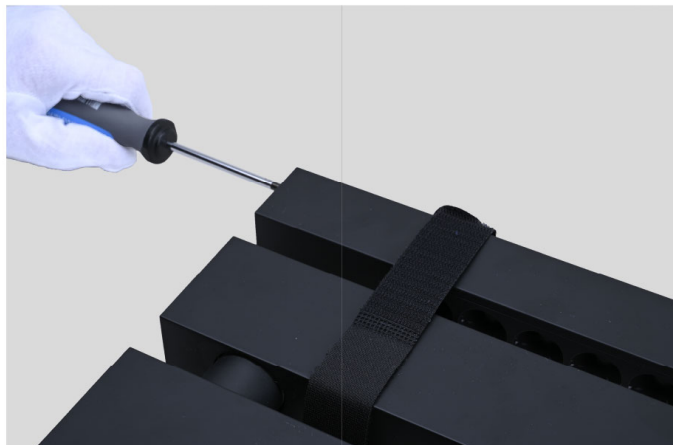


Fig.5

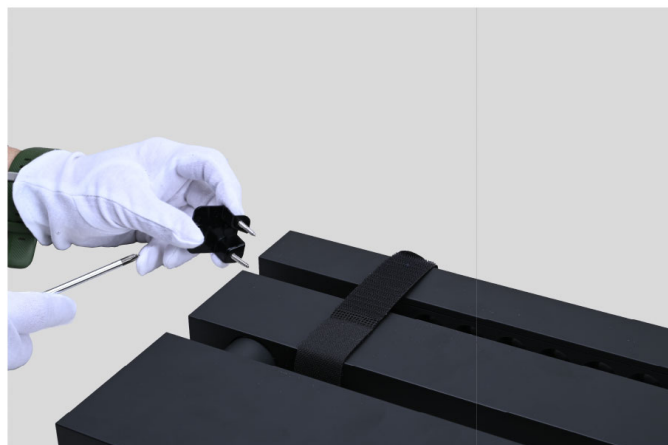


Fig.6

Fig. 5: Using a cross-head screwdriver, unscrew the two screws on the internal cap.
Fig. 6: Remove the internal cap from the lamp body.

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - www.flos.com
Flos reserves the right to introduce any changes to its own models, without prior notice.

RF35320

Black Flag down 2700°K stripe assembly



Fig.7



Fig.8

Fig. 7 & Fig. 8: Remove the complete Led strip.
Perform the procedure in reverse to connect the new LED strip.

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.