

ΕN

RF01484

Rose assembly



ΕN

RF01484

Rose assembly

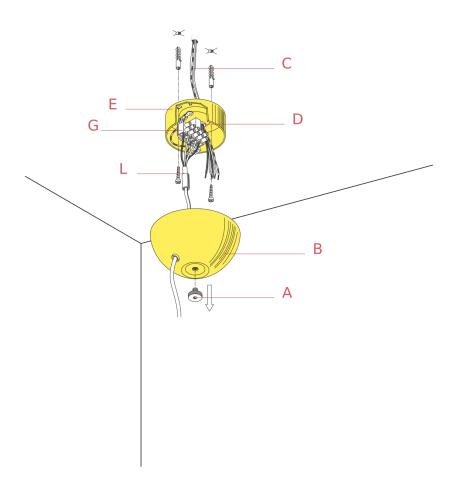


Fig.1

Remove the ceiling rose (B) by unscrewing the knurled screw (A). Pass the wires (C) through the cable entry (D). Fix the wall attachment (B) to the ceiling with screws and plugs.

NOTE: Select and utilize screw plugs which are suited to the surface where the appliance is to be installed. Rotate the terminal board (G) by 90° to facilitate the electrical wiring.

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.