

RF37995

Black Flag Pro down 2700-5000°K stripe assembly



RF37995

Black Flag Pro down 2700-5000°K stripe assembly

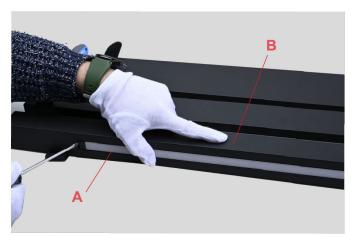




Fig.1 Fig.2

Fig. 1: Using a flat screwdriver, lift the LED diffuser (A) from the lamp body (B).

Fig. 2: Remove the LED diffuser from the lamp body.



RF37995

Black Flag Pro down 2700-5000°K stripe assembly





Fig.3 Fig.4

Fig. 3: Using a cross-head screwdriver, unscrew the black screws inside the lamp body.

Fig. 4: Using a magnet (purchasable as a spare if not available) remove the metal cover to access the internal area of the lamp body.



RF37995

Black Flag Pro down 2700-5000°K stripe assembly

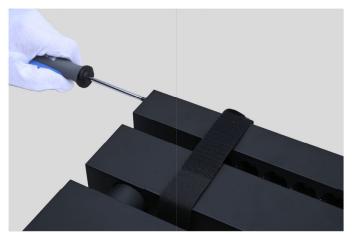




Fig.5 Fig.6

Fig. 5: Using a cross-head screwdriver, unscrew the two screws on the internal cap.

Fig. 6: Remove the internal cap from the lamp body.

RF37995

Black Flag Pro down 2700-5000°K stripe assembly





Fig.7 Fig.8

Fig. 7 & Fig. 8: Remove the complete Led strip.

Perform the procedure in reverse to connect the new LED strip.