

FLOS


09.3780.30A9S White

Find Me 0 (Trim/No Trim)

Designed by Jorge Herrera, 2021

LED - Power LED - 2.8W - 189lm - 3000K - CRI> 90 - Beam° 26

Hide-and-go-seek brought to light. The versatile Find Me is a tiny semi-recessed downlight hidden in the ceiling until otherwise sought. With a simple pull, the downlight can extend below the ceiling and transform into a refined cylindrical monopoint. This diminutive yet powerful luminaire is endlessly versatile and can tilt 90 degrees and rotate 360 degrees. Deep matte black snoot maximizes cut off and reduces glare. The Find Me line is available as a single with trim or without and as a pendant.

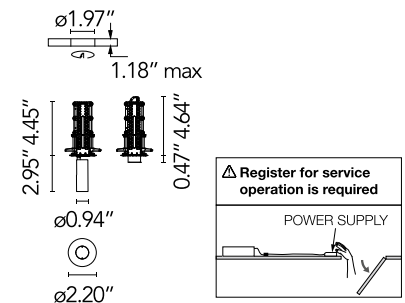

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	2.8
System flux (lm)	189

Physical

Color	White
Orientation	Adjustable
Rotation (°)	360
Longitudinal tilting (°)	90
Recessed depth (in)	5.32
Net weight (lb)	0.3
Gross weight (lb)	0.51
Package volume (in)	245
IP internal	20

Download

Family spec sheet	ZIP
Mounting instructions	PDF

Photometric Files


LDT / IES	ZIP
-----------	-----

Ecodesign and Energy Labelling



IP
20

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
Beam angle C0-180 (°)	26
Beam angle C90-270 (°)	26
UGRL	<10


Electrical

Insulation class	III
Forward voltage (V)	12
LED current (mA)	250
Driver	Remote excluded
Dimmable	Yes

Notes

Integral LED is not field replaceable. IC-rated downlight for direct insulation contact. Fixture is constant Current Low Volatge LED, Class 2. Just 1 accessory can be install at the time. For filter options contact Flos. Wiring suitable for plenum spaces. Maximum remote distance is 50ft with 16ga. 3500K available, but not cataloged. Consult factory for additional color temperatures. Accessories included (honeycomb and screening crosspiece). Remote power supply to be installed in an accessible place. It is not recommended to use dimmable drivers of several brands due to the specific dimming curves of each brand. To use only one driver for various spots, connect the spots in series. Register for service operation is required.

Accessories & Power Supply



REQUIRED
Power supply

SP25W250MA-10V-A01
Splice Box with LED 25W 250mA
0-10V dimmable