

FLOS

03.9931.ESA Bronze

Light Shadow Pro Ø 60 Adjustable Optic Spot

Designed by FLOS Architectural, 2022



10.5W - 783lm - 4000K - CRI> 90 - Beam° 15

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED array
Number of lamps	1
Power (W)	10.5
Source flux (lm)	1148
Lumen Output (lm)	783
Efficacy (lm/W)	75

Physical

Colour	Bronze
Orientation	Adjustable
Rotation (°)	355
Longitudinal tilting (°)	30
Transversal tilting (°)	30
Spot diameter (mm)	60
Net weight (kg)	0.22
Package height (mm)	157
Package width (mm)	210
Package length (mm)	135
IP internal	20

Download

Mounting instructions  PDF

Photometric Files

LDT / IES  ZIP

Technical Drawings

2D  ZIP

3D  ZIP


 Bim  ZIP

Ecodesign and Energy Labelling


This product contains a light source of energy efficiency class E

 REPLACEABLE2

 PWRSUPRPL2

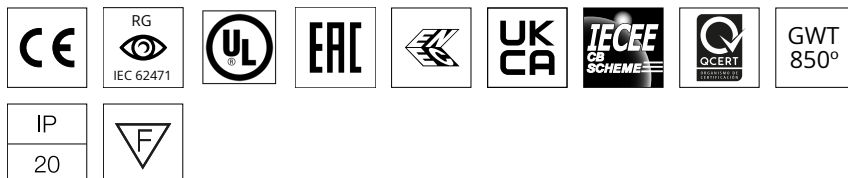

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	4000
CRI>	90
McAdam steps (SDCM)	2
Rf fidelity index	92
Rg gamut index	100
LED Life / Failure Ratio	L70B40 > 50.000h (Tc=85°C)
Beam angle C0-180 (°)	15
Beam angle C90-270 (°)	15
Extreme cut off	Yes
UGRL	<10

Electrical

Insulation class	III
Forward voltage (V)	12.5
LED current (mA)	800
Power supply	Remote excluded
Dimmable	Yes
Power supply type	Non Dimmable, Dimmable Casambi, Mains Cut Dimming, Dimmable DALI 2, Dimmable, Dimmable 1-10V, Dimmable DALI 1

Accessories & Power Supply



REQUIRED
Power supply

ACCESSORYTYPE1

60.9188

Continuous current power supply of 13-20W, 110*/240V - 50/60Hz with current selected through adjustable 200 mA - 13W / 300 mA - 15W / 350 mA - 18W / 400 / 450 / 500 / 550 / 600 / 650 / 700 / 750 / 800 / 850 / 900 mA - 20W. switch. 0/1-10V or push.



REQUIRED
Power supply

ACCESSORYTYPE1

60.9207

Casambi continuous current power supply, dimmable 220/240V - 50/60Hz, 300mA - 16W / 350mA - 18,5W / 400mA - 21,5W / 450 mA - 24W / 500mA - 27W / 600mA - 32W / 650 mA - 35W / 700 mA - 36W /750 /800 /900 /1000 /1050 /1200 mA - 38W.



REQUIRED
Power supply

ACCESSORYTYPE1

60.9439

Continuous current power supply, 0/1-10V dimmable, 220/240V - 50/60Hz, 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W /700 /750 /800 /900/ 950/ 1000 /1050mA-36W



REQUIRED
Power supply

ACCESSORYTYPE1

60.9467

Mains dimming 20W Constant current power supply, AC phase-cut adjustable, trailing & leading edge dimming, 220/240V - 50/60Hz, with dip-switch programmable power supply current. Output current: 900mA - 20W / 850mA - 20W / 800mA - 20W / 750mA - 20W / 70...



REQUIRED
Power supply

ACCESSORYTYPE1

60.7678

Continuous current supply source of 240V - 50/60Hz with dimmable Dali 2, Push dimming. 150mA - 7.8W / 200mA - 10.4W / 250mA - 13W / 300mA - 15.6W / 350mA - 18.2W / 400mA - 20.8W / 500mA - 26W / 600mA - 31.2W / 700mA - 36.4W / 750mA - 39W / 800mA - 41.6...



REQUIRED
Power supply

ACCESSORYTYPE1

60.7677

Non dimmable continuous current power supply of 220/240V - 50/60Hz with power current selected through adjustable with switch. 300mA - 14.4W / 350mA - 16.8W / 400mA - 19.2W / 450mA - 21.6W / 500mA - 24W / 550mA - 26.4W / 600mA - 31.2W / 650mA - 31.2W / ...



REQUIRED
Frame

ACCESSORYTYPE2

08.0164.ES

Installation Frame Trim Ø60



REQUIRED
Frame

08.0166.00

Installation Frame No Trim Ø60



OPTIONAL
Accessory

ACCESSORYTYPE3

08.0825.00

Orientation Toolkit