

FLOS

09.3708.14C9S Black

Find Me 2 (Trim/No Trim)


Designed by Jorge Herrera, 2015



Hide-and-go-seek brought to light. The versatile Find Me is a tiny semi-recessed downlight hidden in the ceiling until otherwise sought. With a simple pull, the downlight can extend below the ceiling and transform into a refined cylindrical monopoint. This diminutive yet powerful luminaire is endlessly versatile and can tilt 90 degrees and rotate 360 degrees. Deep matte black snoot maximizes cut off and reduces glare. The Find Me line is available as a single with trim or without and as a pendant.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

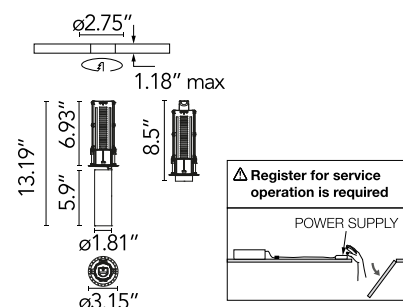

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	7.2
Source flux (lm)	960
System flux (lm)	731

Physical

Color	Black
Orientation	Adjustable
Rotation (°)	360
Longitudinal tilting (°)	90
Recessed depth (in)	7.37
Net weight (lb)	1.2
Package volume (in)	916
IP internal	20

Download

Family spec sheet [ZIP](#)

Mounting instructions [PDF](#)

Photometric Files


LDT / IES [ZIP](#)

Ecodesign and Energy Labelling



Replaceable (LED only)
light source by a
professional

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
Rf fidelity index	91
Rg gamut index	98
LED Life / Failure Ratio	L80B20 >36000h (Tc=85°C)
Beam angle C0-180 (°)	18
Beam angle C90-270 (°)	18
UGR _L	<10

Electrical

Insulation class	III
Forward voltage (V)	12
LED current (mA)	600
Driver	Remote excluded
Dimmable	Yes

Notes

Integral LED is not field replaceable. IC-rated downlight for direct insulation contact. Fixture is constant Current Low Volatge LED, Class 2. Just 1 accessory can be install at the time. For filter options contact Flos. Wiring suitable for plenum spaces. Maximum remote distance is 50ft with 16ga. 3500K available, but not cataloged. Consult factory for additional color temperatures. Accessories included (honeycomb and screening crosspiece). Remote power supply to be installed in an accessible place. It is not recommended to use dimmable drivers of several brands due to the specific dimming curves of each brand. To use only one driver for various spots, connect the spots in series. Register for service operation is required.


Accessories & Power Supply



REQUIRED
Power supply

SP25W600MA-10V-A02

Splice Box 7"x3-5/8"x1-1/4",
600mA , 25W, 0-10V Dimmable,
120/277V



REQUIRED
Power supply

Electrical

SP40W600MA-10V-A01

Splice Box UL 7"x3-5/8"x1-1/4",
600mA , 40W, 0-10V Dimmable,
120/277V