

FLOS

■ F5400030 Black

Parentesi

Designed by Achille Castiglioni and Pio Manzu, 1971


Halogen - 150W



Lamp providing direct light. Lamp moves vertically via sliding of a painted or nickel-plated shaped steel tube on a ceiling-to-floor steel cable (4000 mm long). Fixture head made of injection-molded black elastomer housing a switch. Length of power cord from lamp-holder 4000 mm. Net weight 3 kg.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

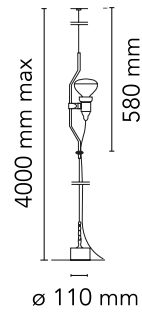

Main specifications

EAN	8059607020272
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	Bulb
Lamp category	Halogen
Lamp holders	E27
Ilcos	HSGSR
Number of heads	1
Power (W)	150

Physical

Colour	Black
Length (mm)	110
Cord colour	Black
Cord length (mm)	4000
Canopy colour	Black
Canopy dimension (mm)	64
Canopy height (mm)	20
Net weight (kg)	3.2
Package height (mm)	90
Package width (mm)	150
Package length (mm)	610
Package volume (m3)	0.01
IP internal	20

Download

[Mounting instructions](#)  PDF

[Spare Parts](#)  PDF

Photometric Files

[LDT / IES](#)  LDT

Technical Drawings


[2D](#)  ZIP

[3D](#)  ZIP

[Bim](#)  ZIP



Schematic light drawing

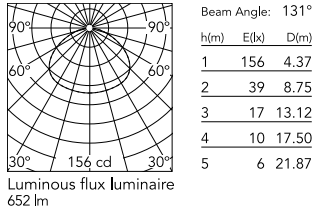

Photometric

Light distribution	Symmetric
Extreme cut off	No

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-250
LED voltage Vf (Vdc)	null
Dimmable	Yes
Dimming interface	Switch Integrated (Remote Dimmable)
Plug type	Type C
Batteries inside	No

Accessories & Power Supply




OPTIONAL

F5500030

Parentesi Element


Bulbs



NOT INCLUDED

RF32366

LED Lamp 12W E27 220-240V
2700K R125




NOT INCLUDED

RF35355

LED Lamp 13W E27 220-240V
2700K R125

Spare Parts

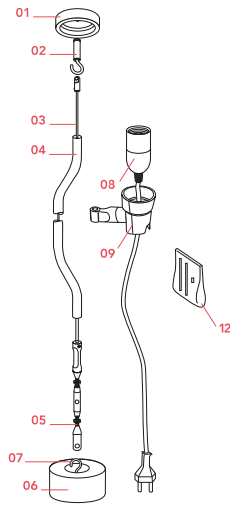

01.	Complete black rose	RF5400130
02.	Anchor hook screw	RF06745
03.	Parentesi 4m steel cable	RF01442
03.	Parentesi 6m steel cable	RF01444
04.	Black tube	RF02600
05.	Parentesi inox turnbuckle & grub screw	RF01438
06.	Base for Parentesi & Parentesi D	RF5601600
07.	Hook + nut	RF06747
08.	Parentesi switch assembly	RF04633
09.	Parentesi rubber support	RF35511
12.	Kit wire ties and screw	RF5600200

DOWNLOAD



RF5400130

Complete black rose



RF06745

Anchor hook screw



RF01442

Parentesi 4m steel cable



RF01444

Parentesi 6m steel cable



RF02600

Black tube



RF01438

Parentesi inox turnbuckle & grub screw



RF5601600

Base for Parentesi & Pasentesi D



RF06747

Hook + nut



RF04633

Parentesi switch assembly



RF35511

Parentesi rubber support



RF5600200

Kit wire ties and screw