

Easy Kap 80 Plus Square Adjustable Optic Spot

Designed by FLOS Architectural, 2019


LED - LED array - 13W - 1067lm - 2700K - CRI> 90 - Beam° 17

Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary. Diffusing lens included.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED array
Lamp category	LED
Number of lamps	1
Power (W)	13
System power (W)	13.4
Source flux (lm)	1342
Lumen Output (lm)	1067
Efficacy (lm/W)	79

Physical

Colour	Gold
Trim	Yes
Orientation	Adjustable
Rotation (°)	360
Longitudinal tilting (°)	20
Transversal tilting (°)	20
Recessed depth (mm)	150
Bezel diameter (mm)	80
Spot diameter (mm)	80
Length (mm)	80
Net weight (kg)	0.24
Package height (mm)	90
Package width (mm)	125
Package length (mm)	145
IP internal	20
IP external	54

Download

Mounting instructions	PDF
Item information	JPG

Photometric Files


LDT / IES	ZIP
-----------	---------------------

Technical Drawings

2D	ZIP
3D	ZIP
Bim	ZIP



Schematic light drawing



Beam Angle:	17°	
h(m)	E(lx)	D(m)
1	4173	0.31
2	1043	0.62
3	464	0.92
4	261	1.23
5	167	1.54

Luminous flux luminaire
1067 lm (EXTREME CUT OFF)


Photometric

Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B50 > 50.000h (Tc=85°C)
Beam angle C0-180 (°)	17
Beam angle C90-270 (°)	17
UGRL	<19

Electrical

Insulation class	III
Frequency (Hz)	0
Forward voltage (V)	17.8
LED current (mA)	700
Power supply	Remote excluded
Dimmable	Yes
Power supply type	Non Dimmable, Dimmable DALI 2, Dimmable 0-10V, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1, Mains Cut Dimming

Ecodesign and Energy Labelling

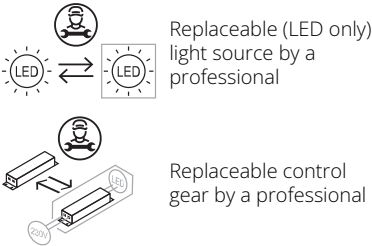

Accessories & Power Supply



REQUIRED
Power supply

ACCESSORYTYPE1

60.9188

Continuous current power supply of 13-20W, 110*/240V - 50/60Hz with current selected through adjustable 200 mA - 13W / 300 mA - 15W / 350 mA - 18W / 400 / 450 / 500 / 550 / 600 / 650 / 700 / 750 / 800 / 850 / 900 mA - 20W. switch. 0/1-10V or push.

REQUIRED
Power supply

ACCESSORYTYPE1

60.9592

Non dimmable continuous current power supply. 15-30W, 220/240V -50/60Hz with power current selected through adjustable switch. 350mA - 15W / 400mA - 17W / 450mA - 19W / 500mA - 22W / 550mA - 24W / 600mA - 26W / 650mA - 28W / 700mA - 30W.

REQUIRED
Power supply

ACCESSORYTYPE1

60.9826

Continuous current power supply of 12-20W, 110/240V - 50/60Hz with power current selected through DIP-switch 350mA - 15W / 500mA - 21W / 600mA - 26W / 700mA - 30W dimmable Dali 1, Dali 2 & PUSH

REQUIRED
Power supply

ACCESSORYTYPE1

60.9207

Casambi continuous current power supply, dimmable 220/240V - 50/60Hz, 300mA - 16W / 350mA - 18,5W / 400mA - 21,5W / 450 mA - 24W / 500mA - 27W / 600mA - 32W / 650 mA - 35W / 700 mA - 36W /750 /800 /900 /1000 /1050 /1200 mA - 38W.



REQUIRED Power supply

ACCESSORYTYPE1

60.9467

Mains dimming 20W Constant current power supply, AC phase-cut adjustable, trailing & leading edge dimming, 220/240V - 50/60Hz, with dip-switch programmable power supply current. Output current: 900mA - 20W / 850mA - 20W / 800mA - 20W / 750mA - 20W / 70...