

# FLOS


FA1051740018 Deep Brown

## Aimer 3 Rgb

Designed by FLOS Outdoor



RGB LED source included. Remote electrical power supply with DMX 3chx350mA interface to be ordered separately. Serial connection. Equipped with a 2000 mm protruding section of neoprene cable and a kit with crimpable connectors and adhesive heat-shrinkable sleeves that guarantee the tightness of the connection. Transparent screen-printed glass. The metal nail for ground installation needs to be ordered separately.

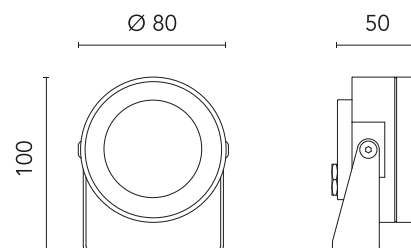

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

EAN	8054793608389
Mounting	Ground
Environments	Outdoor wet location
LED type	Power LED
Power (W)	3
System power (W)	3.4

### Physical

Colour	Deep Brown
Orientation	Directional
Longitudinal tilting (°)	185
Net weight (kg)	0.65
Package height (mm)	75
Package width (mm)	145
Package length (mm)	235
IP internal	66
IP external	67

### Download

[Mounting instructions](#)



### Ecodesign and Energy Labelling



Replaceable (LED only) light source by a professional



## Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	RGB
Extreme cut off	No

## Electrical

Insulation class	III
Power supply	Remote excluded
Power supply type	Dimmable DMX
Emergency	No

## Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

---

## Accessories & Power Supply



OPTIONAL  
Accessory

F990B10A000

DMX controller; dimmer switch for recessed box (60mm hole centres)



OPTIONAL  
Accessory

F990B11A000

DMX controller; stand-alone/pc interface.



OPTIONAL  
Accessory

F990B13A000

DMX splitter 512



OPTIONAL  
Accessory

F990B12A000

DMX cable - shielded twisted pair with 110 Ohm constant impedance



OPTIONAL  
Accessory

FA5130

Visor for Aimer 3



OPTIONAL  
Accessory

FA136

Ground Spike Aimer 1/Aimer 2/Aimer 3/Perseo 2