

FLOS


FA1051740033 Anthracite

Aimer 3 Rgb

Designed by FLOS Outdoor, 2011



RGB LED source included. Remote electrical power supply with DMX 3chx350mA interface to be ordered separately. Serial connection. Equipped with a 2000 mm protruding section of neoprene cable and a kit with crimpable connectors and adhesive heat-shrinkable sleeves that guarantee the tightness of the connection. Transparent screen-printed glass. The metal nail for ground installation needs to be ordered separately.

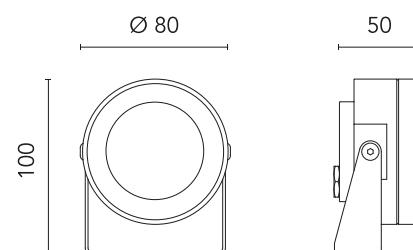

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

| | |
|------------------------|----------------------|
| EAN | 8054793608402 |
| Mounting | Ground |
| Environments | Outdoor wet location |
| Light source type | LED |
| Light sources included | Yes |
| LED type | Power LED |
| Number of lamps | 1 |
| Power (W) | 3 |
| System power (W) | 3.4 |

Physical

| | |
|--------------------------|-------------|
| Colour | Anthracite |
| Orientation | Directional |
| Longitudinal tilting (°) | 185 |
| Net weight (kg) | 0.65 |
| Package height (mm) | 75 |
| Package width (mm) | 145 |
| Package length (mm) | 235 |
| IP internal | 67 |
| IP external | 66 |

Download

Mounting instructions [↓ ZIP](#)

Ecodesign and Energy Labelling



Replaceable (LED only) light source by a professional



Photometric

| | |
|--------------------|-----------|
| Lighting type | Direct |
| Light distribution | Symmetric |
| CCT (K) | RGB |
| Extreme cut off | No |

Electrical

| | |
|-------------------|---|
| Insulation class | III |
| Frequency (Hz) | 50/60 |
| Power supply | Remote excluded |
| Dimmable | Yes |
| Power supply type | Dimmable DMX |
| Dimming interface | Remote Dimmable (Dimmer Not Included) |
| Emergency | No |

Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

Accessories & Power Supply



OPTIONAL Accessory

F990B10A000

DMX controller; dimmer switch for recessed box (60mm hole centres)



OPTIONAL Accessory

F990B11A000

DMX controller; stand-alone/pc interface.



OPTIONAL Accessory

F990B13A000

DMX splitter 512



OPTIONAL Accessory

F990B12A000

DMX cable - shielded twisted pair with 110 Ohm constant impedance



OPTIONAL Power supply

F990B22A000

Power supply with DMX interface for RGB fixtures 36W/220÷240v-3CH x 350mA (3CH x 10 x 1W) DMX control allowed IP67 Class I Selv Eq.



OPTIONAL Accessory

FA5130

Visor for Aimer 3



OPTIONAL Accessory

FA136

Ground Spike Aimer 1/Aimer 2/Aimer 3/Perseo 2