

60.7709

Continuous current supply source of 220-240V - 50/60Hz with selectable current via switch. Dimmable Dali 1, Dali 2, push dimming. 150mA - 7.8W / 200mA - 10.4W / 250mA - 13W / 300mA - 15.6W / 350mA - 18.2W / 400mA - 20.8W / 450mA - 23.4W / 500mA - 26W /...



Continuous current supply source of 220 - 240V - 50/60Hz with dimmable Dali 2 & push dimming, 150mA - 7.8W / 200mA - 10.4W / 250mA - 13W / 300mA - 15.6W / 350mA - 18.2W / 400mA - 20.8W / 450mA - 23.4W / 500mA - 26W / 550mA - 26.1W / 600mA - 26.1W / 650mA - 26W / 700mA - 26.3W

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Power (W) 26.3

Physical

IP internal 20

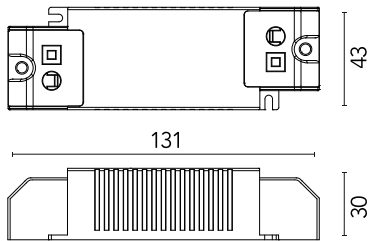

Photometric

Extreme cut off No

Electrical

Frequency (Hz)	50/60
Main voltage (Vac)	230
Driver output voltage (V)	9-37.5
LED current (mA)	150 mA – 700 mA
Power supply type	Dimmable DALI 2, Mains Cut Dimming
Precabled	No