

**Continuous current power supply of 12-20W,  
110/240V - 50/60Hz with power current selected  
through DIP-switch 350mA - 15W / 500mA - 21W /  
600mA - 26W / 700mA - 30W dimmable Dali 1, Dali  
2 & PUSH**



Continuous current power supply of 110/240V - 50/60Hz with power current selected through DIP-switch 350mA - 15W / 500mA - 21W / 600mA - 26W / 700mA - 30W Dali 1, Dali 2 & PUSH dimming

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

## Main specifications

Environments	Indoor dry location
Power (W)	30
System power (W)	35.7

## Physical

Length (mm)	152
Net weight (kg)	0.26
IP internal	20

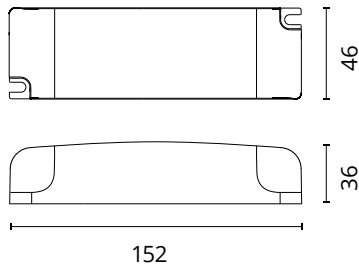

IP  
20

## Ecodesign and Energy Labelling



Replaceable control gear by a professional

Electrical

Insulation class	II
Frequency (Hz)	50-60
Main voltage (Vac)	110-240
Driver output voltage (V)	10-43
Forward voltage (V)	10
LED current (mA)	350 / 500 / 600 / 700
Dimmable	Yes
Power supply type	Dimmable DALI 2, Dimmable Push, Dimmable DALI 1
Dimming range (%)	1-100
Precabled	No