


# FLOS

F0392009 Off-white

## Almendra Linear Suspension 4 Primer

Designed by Patricia Urquiola, 2022

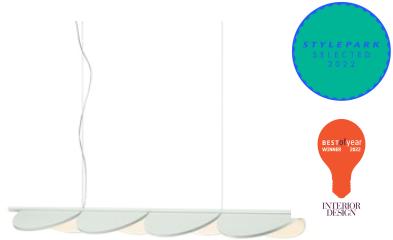


60W - 2340lm - 2700K - CRI>95

Suspension lamp with diffused light emission available in linear and organic compositions. Tubular structure made of aluminium and CNC aluminium terminals with matte or metallized finish. Edge Lighting technology integrated. Light units can be turned by steps of 60° within the structure in order to change the direction of the light emitted. Metal rosette with primer finish. The integrated electronics in the ceiling rose allow the use of different dimming systems: 1-10V, DALI, push-dim or potentiometer. Useful length of the cable 3 mt. The product has been designed according to the ISCC standards and it is assembled with total absence of glued components so that it can be completely separated for future recyclability.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

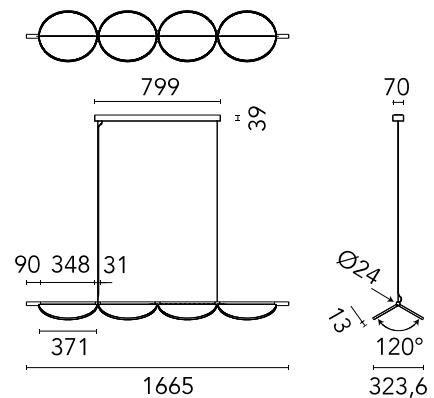

### Main specifications

EAN	8059607050743
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Edge Lighting
Power (W)	60
Lumen Output (lm)	2340

### Physical

Colour	Off-white
Length (mm)	1665
Cord colour	Clear
Canopy colour	Primer
Canopy length/diameter (mm)	799
Canopy width (mm)	70
Canopy height (mm)	39
Net weight (kg)	10.18
Package volume (m3)	0.22
IP internal	20

### Download

Mounting instructions [PDF](#)

### Photometric Files

LDT / IES [LDT](#)

### Technical Drawings


2D [ZIP](#)

3D [ZIP](#)

Bim [ZIP](#)




## Schematic light drawing



## Ecodesesign and Energy Labelling

This product contains a light source of energy efficiency class E



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional


## Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	95

## Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)

## Spare Parts

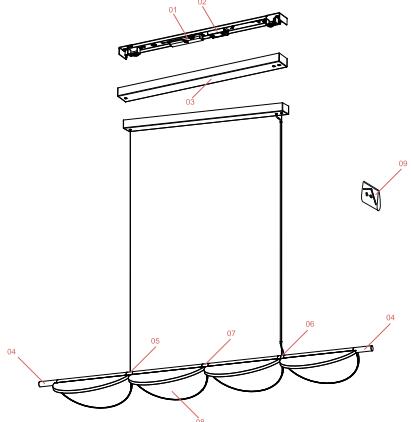

01.	Driver 96W 48V 220-240V	RF32405
02.	Led dimmer kit	RF34197
04.	Almendra White terminal joint L90	RF32773
05.	Almendra wiring and connections white assembly	RF32530
06.	Almendra white suspension wiring assembly	RF32521
07.	Assembly Almendra Suspension Wiring White	RF32569
08.	Almendra Suspension White body assembly	RF32514
09.	Kit with screws and allen key	RF3160100



RF32405

Driver 96W 48V 220-240V



RF34197

Led dimmer kit



RF32773

Almendra White terminal joint  
L90

# FLOS

RF32530

Almendra wiring and connections  
white assembly

RF32521

Almendra white suspension  
wiring assembly

RF32569

Assembly Almendra Suspension  
Wiring White

RF32514

Almendra Suspension White body  
assembly

RF3160100

Kit with screws and allen key