

03.8027.40B1V White

Anthony Spot Track Dimmable 1-10V

Designed by Antonio Citterio, 2018



LED - LED array - 1479lm - Beam° 15

Accent lighting LED module to be installed in The Tracking Magnet System. To obtain flood optics (35°) order Anthony Spot Medium + flood lens.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Track
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED array
Lamp category	LED
Number of lamps	1
System power (W)	17.5
Source flux (lm)	1931
Lumen Output (lm)	1479
Efficacy (lm/W)	85

Physical

Colour	White
Trim	No
Orientation	Adjustable
Rotation (°)	360
Longitudinal tilting (°)	90
Spot diameter (mm)	110
Length (mm)	178
Net weight (kg)	0.43
IP internal	20
IP external	20

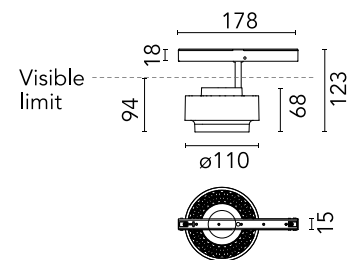

Download

Mounting instructions [Download PDF](#)

Photometric Files

LDT / IES [Download ZIP](#)

Technical Drawings

2D [Download ZIP](#)

3D [Download ZIP](#)




Ecodesign and Energy Labelling

 Replaceable (LED only) light source by a professional

 Replaceable control gear by a professional

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
LED Life / Failure Ratio	L80B50 > 50.000h (Tc=85°C)
Beam angle C0-180 (°)	15
Beam angle C90-270 (°)	15
Extreme cut off	No
UGRL	<16

Electrical

Insulation class	III
Forward voltage (V)	48
LED current (mA)	450
Power supply	Remote excluded
Dimmable	Yes
Power supply type	Dimmable 1-10V
Dimming range (%)	20-100
Dimming interface	Remote Dimmable (Dimmer Not Included)
Emergency	No

Notes

Only compatible with 1-10V profile version. For wireless lighting control, choose integrated Casambi versions.

Accessories & Power Supply



OPTIONAL
Accessory

ACCESSORYTYPE4

08.8419.14A

Honeycomb



OPTIONAL
Accessory

ACCESSORYTYPE4

08.0050.00

Flood lens



OPTIONAL
Accessory

ACCESSORYTYPE4

08.8418.68A

Elliptical lens