

FLOS


FA10517114357.A Polished Stainless Steel

Aqua Aimer 1

Designed by FLOS Outdoor, 2011



LED source. 316L stainless steel body and bracket, suitable for submersion. Remote power supply 350 mA ON/OFF and dimmable 1-10V or DALI. Must be ordered separately. Serial connection. Equipped with a 5000 mm protruding section of neoprene cable and a kit with crimpable connectors and adhesive heat-shrinkable sleeves that guarantee the tightness of the connection. Extraclear transparent glass. The metal nail for ground installation needs to be ordered separately. 2700K and 3000K models available upon request.

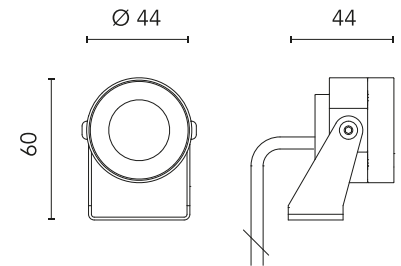

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

| | |
|------------------------|---------------|
| EAN | 8054793607948 |
| Mounting | Ground |
| Light source type | LED |
| Light sources included | Yes |
| LED type | Power LED |
| Number of lamps | 1 |
| Power (W) | 1 |
| System power (W) | 1.1 |
| Source flux (lm) | 124 |
| Lumen Output (lm) | 103 |

Physical

| | |
|---------------------|--------------------------|
| Colour | Polished Stainless Steel |
| Orientation | Directional |
| Net weight (kg) | 0.4 |
| Package height (mm) | 90 |
| Package width (mm) | 140 |
| Package length (mm) | 140 |
| IP internal | 68 |
| IP external | 66 |

Photometric Files

LDT / IES [ZIP](#)

Technical Drawings

2D [ZIP](#)


3D [ZIP](#)

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Schematic light drawing



| | | |
|-------------|-------|------|
| Beam Angle: | 47° | |
| h(m) | E(lx) | D(m) |
| 1 | 145 | 0.86 |
| 2 | 36 | 1.73 |
| 3 | 16 | 2.59 |
| 4 | 9 | 3.45 |
| 5 | 6 | 4.31 |

Photometric

| | |
|------------------------|-----------|
| Lighting type | Direct |
| Light distribution | Symmetric |
| CCT (K) | 4000 |
| CRI> | 80 |
| Beam angle C0-180 (°) | 46 |
| Beam angle C90-270 (°) | 46 |
| Extreme cut off | No |

Electrical

| | |
|-------------------|---|
| Insulation class | III |
| Frequency (Hz) | 50/60 |
| Power supply | Remote excluded |
| Dimmable | Yes |
| Power supply type | Non Dimmable, Dimmable 1-10V, Dimmable DALI 1 |
| Dimming interface | Remote Dimmable (Dimmer Not Included) |
| Emergency | No |

Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

Accessories & Power Supply



OPTIONAL Accessory

FA136

Ground Spike Aimer 1/Aimer
2/Aimer 3/Perseo 2



OPTIONAL Power supply

FA184

Power supply 16 x 1W/ 110÷240V
- Iout 350mA (12x1W@110V) IP67
Class II Selv Dimmable Push-
Dimm Or 1.10V



OPTIONAL Power supply

RF25748

Power Supply dual function C.V.
Vout 24Vdc 8W, Vin 220÷240V
C.C. Iout 350mA: 8W, Vin
220÷240V IP 65 Class II Selv. NON
Dimmable