

FLOS

■ F0418030 Black

Arrangements Recessed Rose

Designed by Michael Anastassiades, 2018



Recessed Rose-MAX190W

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Download

[Mounting instructions](#)  PDF

[Spare Parts](#)  PDF

Main specifications

EAN	8059607014202
Environments	Indoor dry location
Power (W)	210

Physical

Colour	Black
Recessed depth (mm)	250
Cord colour	Black
Cord length (mm)	2400
Canopy colour	Black
Canopy length/diameter (mm)	190
Canopy height (mm)	8
Net weight (kg)	3.35
Package height (mm)	220
Package width (mm)	300
Package length (mm)	470
Package volume (m3)	0.03
IP internal	20




Photometric

Extreme cut off No

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Spare Parts

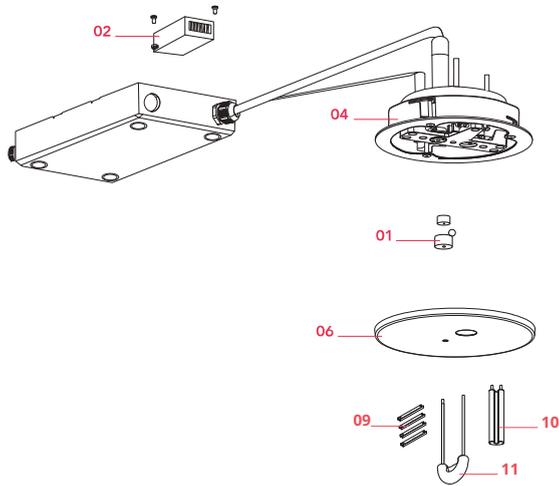

- | | | |
|-----|---|---------|
| 00. | Push button and cables assembly for dimmer | RF27318 |
| 02. | Led dimmer kit | RF34197 |
| 03. | Arrangements Recessed power unit | RF27614 |
| 04. | Arrangements Recessed ceiling wall assembly | RF27613 |
| 06. | Arrangements Recessed ceiling rose cover | RF26773 |
| 09. | Spacers cable | RF26602 |
| 10. | Regulation cables key | RF26440 |
| 11. | Element support assembly | RF26906 |

[DOWNLOAD](#)



RF27318
Push button and cables assembly
for dimmer



RF34197
Led dimmer kit



RF27614
Arrangements Recessed power
unit



RF27613
Arrangements Recessed ceiling
wall assembly



RF26773
Arrangements Recessed ceiling
rose cover



RF26602
Spacers cable



RF26440
Regulation cables key



RF26906
Element support assembly