

Atom 90

Designed by Piero Lissoni, 2018



Accent lighting LED module to be installed in the Zero Track system. Incorporated DC/DC electronic converter. Module non-dimmable. To individually control the lights, select integrated Casambi versions.

 Drawing Thumbnail

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Track
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Number of lamps	1
Power (W)	4.7
Source flux (lm)	485
System flux (lm)	261
Efficacy (lm/W)	56

Physical

Color	Polished Silver
Trim	No
Orientation	Adjustable
Rotation (°)	360
Longitudinal tilting (°)	90
Length (in)	0.9
Net weight (lb)	0.23
IP internal	20

Download

Family spec sheet	ZIP
Mounting instructions	PDF
Item information	JPG

Photometric Files


LDT / IES	ZIP
-----------	---------------------

Technical Drawings


2D	ZIP
3D	ZIP



Ecodesign and Energy Labelling

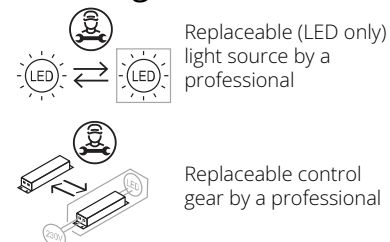

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B50>50.000h (Tc=85°C)
Beam angle C0-180 (°)	25
Beam angle C90-270 (°)	25
Extreme cut off	No
UGR _L	<10

Electrical

Insulation class	III
Forward voltage (V)	24
LED current (mA)	330
Driver	Remote excluded
Dimmable	Yes
Dimming type	Non Dimmable

Notes

Accessories included (honeycomb and screening crosspiece).