

## Bellhop Bollard H 380 mm Non Dimmable


Designed by Edward Barber and Jay Osgerby, 2018

8W - 607lm - 4000K - CRI> 80 - Beam° 85



Outdoor bollard lamp emitting diffused light. Structure in extruded and die-cast aluminium or stainless steel. Integrated LED light source and 100–240V power supply. Designed for installation on solid surfaces. Recommended IP68 terminal block sold separately.

Designed by Edward Barber and Jay Osgerby, Bellhop Bollard translates the iconic Bellhop silhouette into an outdoor setting. Evolving from the original lamp created in 2016 for the Design Museum in London, it combines the familiar bell-shaped diffuser with a more architectural form. This model expands the collection's versatility to a vast new sector, bringing soft, atmospheric lighting to pathways and gardens with the same understated elegance that defines the family.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

|                        |                      |
|------------------------|----------------------|
| EAN                    | 8054793186177        |
| Mounting               | Ground               |
| Environments           | Outdoor wet location |
| Light Source Type      | LED                  |
| Light sources included | Yes                  |
| LED type               | Power LED            |
| Number of lamps        | 1                    |
| Power (W)              | 8                    |
| Source flux (lm)       | 873                  |
| System flux (lm)       | 607                  |

### Physical

|                     |            |
|---------------------|------------|
| Color               | Deep Brown |
| Trim                | No         |
| Orientation         | Fixed      |
| Net weight (lb)     | 3.97       |
| Gross weight (lb)   | 4.41       |
| Package height (in) | 20.28      |
| Package width (in)  | 6.5        |
| Package length (in) | 6.5        |
| Package volume (in) | 73.23      |
| IP internal         | 65         |
| H2O stop            | No         |
| Dynamic load (kg)   | No         |

### Download


Family spec sheet [ZIP](#)  
Mounting instructions [ZIP](#)

### Photometric Files

LDT / IES [ZIP](#)


### Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D

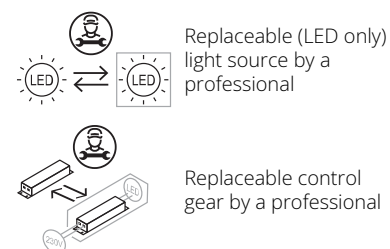



## Schematic light drawing



## Photometric

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| Light distribution     | Symmetric |
| CCT (K)                | 4000      |
| CRI>                   | 80        |
| Beam angle C0-180 (°)  | 85        |
| Beam angle C90-270 (°) | 85        |
| Extreme cut off        | No        |

## Electrical

|                    |              |
|--------------------|--------------|
| Insulation class   | I            |
| Frequency (Hz)     | 60           |
| Main voltage (Vac) | 120          |
| Driver             | Integrated   |
| Dimmable           | No           |
| Dimming type       | Non Dimmable |
| Dimming interface  | Not Dimmable |
| Emergency type     | No           |

## Notes

During the installation and the maintenance of the fixtures it is important to be careful and avoid damages on the paint coating.

Damages on the coating exposed to outdoor conditions or water, could cause corrosion.

Chemical substances affect the anticorrosion covering protection.

For LED fixtures, there is evidence that most of the damages are connected to electrical effects related to the insulations, which cause destructive electrical discharges

These effects are frequently caused by:

- over voltage coming from the mains' network where fixture is connected.
- electrostatic discharge (ESD) coming from the environment.

The use of a protective device against the overvoltage on the electrical installation is warmly suggest this helps to reduce the intensity of some of these phenomenon and prevent irreversible damages. The selection of the type of device to be used must be adjust on the electrical plant.

---

Accessories & Power Supply



OPTIONAL  
Accessory

F003Z010000

Base plate with bolt