

Bellhop Unplugged


Designed by Edward Barber and Jay Osgerby, 2018



2W - 87lm - 2200-2700-3000K - CRI> 90

Portable table lamp emitting direct light. Features a polycarbonate (PC) base and dome with an opaline, injection-moulded, photo-engraved PC diffuser. The base houses a push-button switch with 4-step dimming, 3-step colour temperature selection and a battery status indicator. Provides up to 24 hours of use. IP54 protection rating for outdoor use. Rechargeable via USB-C. Charging cable included.

Originally designed in 2016 as a bespoke table light for the Parabola restaurant and members' room at the Design Museum in London, Bellhop has since become a contemporary essential. Its iconic bell-shaped diffuser evokes the warm glow of a modern-day candle, bringing soft, atmospheric light wherever needed. Created for everyday use in any setting, Bellhop's name pays homage to the hotel porter, reflecting its versatile, go-anywhere spirit and understated presence.



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

EAN	8059607080795
Mounting	Portable
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED Module
Number of lamps	1
Power (W)	2
Source flux (lm)	87
System flux (lm)	87

Physical

Color	Glossy Black
Length (in)	4.92
Net weight (lb)	1.65
Gross weight (lb)	3.42
Package height (in)	7.87
Package width (in)	7.87
Package length (in)	12.99
Package volume (in)	805.52
IP internal	54

Download

Mounting instructions [Download PDF](#)

Photometric Files

LDT / IES [Download LDT](#)


Technical Drawings

2D [Download ZIP](#)

3D [Download ZIP](#)



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2200-2700-3000
CRI>	90
LED Life / Failure Ratio	30000
Extreme cut off	No

Electrical


Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	5
Driver	Remote excluded
Dimmable	Yes
Dimming interface	Dimmer Integrated
Induction recharge Qi	No
Batteries inside	Yes
Battery type	LI-IO
Charging cycles guaranteed	1000
Charging min time	4
Charging socket/connector	USB-C

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class C



Non-replaceable light source




Replaceable control gear by an end-user

Spare Parts

01.

Bellhop TW Battery pack

RF38035

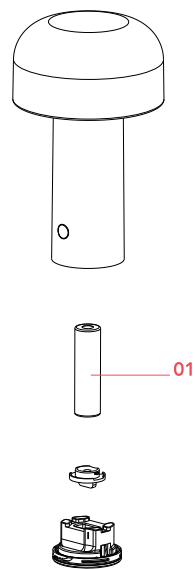

(*) The battery kit is only compatible with the new "TW" models. It is not backward compatible with older product versions.



RF38035

Bellhop TW Battery pack