FLOS

F003C31BU56 Matte Stainless Steel

Bellhop Wall Dimmable 1-10V

Designed by Edward Barber and Jay Osgerby, 2018



8W - 580lm - 3000K - CRI> 80

Wall light version of the Bellhop Outdoor Collection for diffuse light, made of extruded and die-cast aluminium or stainless steel. Direct wall installation. Each luminaire is equipped with 200 mm lenght cable for connection inside the luminaire body. Reccomended connection wit a 2 way terminal block 4 poles IP68 H2O Stop, to be ordered separately. 100-240V power supply integrated.

Designed by Edward Barber and Jay Osgerby, Bellhop Wall translates the iconic Bellhop silhouette into an outdoor setting. Evolving from the original lamp created in 2016 for the Design Museum in London, it combines the familiar bell-shaped diffuser with a more architectural form. This model expands the collection's versatility to a vast new sector, bringing soft, functional lighting with the same understated elegance that defines the family.

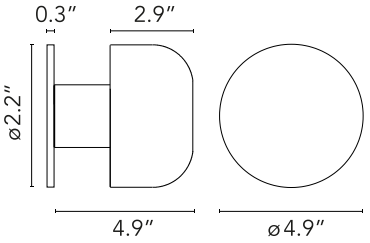

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

EAN	8054793833996
Environments	Outdoor wet location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Number of lamps	1
Power (W)	8
Source flux (lm)	816
System flux (lm)	580

Physical

Color	Matte Stainless Steel
Trim	No
Net weight (lb)	2.76
Gross weight (lb)	2.98
Package height (in)	7.48
Package width (in)	7.48
Package length (in)	5.32
Package volume (in)	297.43
IP internal	65
H2O stop	No
Drive Over	No

Download

Family spec sheet ZIP

Photometric Files

LDT / IES ZIP

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D



Replaceable (LED only) light source by a professional

Replaceable control gear by a professional

RG IEC 62471 | IP 65 | IK 10

Schematic light drawing



Luminous flux luminaire
580 lm

Photometric

Light distribution	Symmetric
CCT (K)	3000
CRI>	80

Electrical

Insulation class	I
Frequency (Hz)	60
Main voltage (Vac)	120
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 1-10V
Dimming interface	Dimmer Integrated