


Bellhop Wall Non Dimmable

Designed by Edward Barber and Jay Osgerby, 2018



Wall light version of the Bellhop Outdoor Collection for diffuse light, made of extruded and die-cast aluminium or stainless steel. Direct wall installation. Each luminaire is equipped with 200 mm lenght cable for connection inside the luminaire body. Reccomended connection wit a 2 way terminal block 4 poles IP68 H2O Stop, to be ordered separately. 100-240V power supply integrated.

Designed by Edward Barber and Jay Osgerby, Bellhop Wall translates the iconic Bellhop silhouette into an outdoor setting. Evolving from the original lamp created in 2016 for the Design Museum in London, it combines the familiar bell-shaped diffuser with a more architectural form. This model expands the collection's versatility to a vast new sector, bringing soft, functional lighting with the same understated elegance that defines the family.

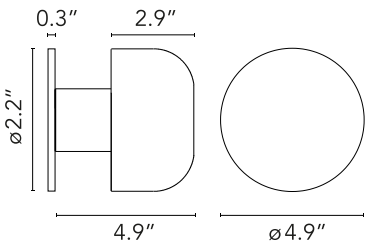

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

EAN	8054793188850
Mounting	Wall
Environments	Outdoor wet location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Number of lamps	1
Power (W)	8
Source flux (lm)	783
System flux (lm)	551

Physical

Color	Matte Stainless Steel
Trim	No
Orientation	Fixed
Net weight (lb)	2.76
Gross weight (lb)	2.98
Package height (in)	7.48
Package width (in)	7.48
Package length (in)	5.32
Package volume (in)	297.43
IP internal	65
H2O stop	No
Drive Over	No

Download

- Family spec sheet

ZIP
- Mounting instructions

ZIP

Photometric Files

- LDT / IES

ZIP

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D

LED

↔

LED

Replaceable (LED only) light source by a professional

200V


↔

200V

Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	80
Beam angle C0-180 (°)	85
Beam angle C90-270 (°)	85
Extreme cut off	No

Electrical

Insulation class	I
Frequency (Hz)	60
Main voltage (Vac)	120
Driver	Integrated
Dimmable	No
Dimming type	Non Dimmable
Dimming interface	Not Dimmable
Emergency type	No

Notes

We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.

During the installation and the maintenance of the fixtures it is important to be careful and avoid damages on the paint coating.

Damages on the coating exposed to outdoor conditions or water, could cause corrosion.

Chemical substances affect the anticorrosion covering protection.

For LED fixtures, there is evidence that most of the damages are connected to electrical effects related to the insulations, which cause destructive electrical discharges

These effects are frequently caused by:

- over voltage coming from the mains' network where fixture is connected.
- electrostatic discharge (ESD) coming from the environment.

The use of a protective device against the overvoltage on the electrical installation is warmly suggest this helps to reduce the intensity of some of these phenomenon and prevent irreversible damages. The selection of the type of device to be used must be adjust on the electrical plant.