

FLOS

03.2005.14A Black

Bon Jour Ø 145

Designed by Philippe Starck, 2016



Recessed luminaire with LED light source. Remote 220/240V power supply included.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

| | |
|------------------------|---------------------|
| Mounting | Semirecessed |
| Environments | Indoor dry location |
| Light source type | LED |
| Light sources included | Yes |
| LED type | LED array |
| Lamp category | LED |
| Number of lamps | 1 |
| System power (W) | 36 |
| Source flux (lm) | 3845 |
| Lumen Output (lm) | 695 |

Physical

| | |
|---------------------|-------|
| Colour | Black |
| Trim | Yes |
| Recessed depth (mm) | 205 |
| Bezel diameter (mm) | 145 |
| Net weight (kg) | 1.11 |
| Package volume (m3) | 0.01 |
| IP internal | 20 |
| IP external | 44 |



Download

[Mounting instructions](#) PDF

Photometric Files

[LDT / IES](#) ZIP

Technical Drawings


[2D](#) ZIP

[3D](#) ZIP

[Bim](#) ZIP



Schematic light drawing



Photometric


| | |
|------------------------|-----------|
| Lighting type | Direct |
| Light distribution | Symmetric |
| CCT (K) | 2700 |
| CRI> | 90 |
| Beam angle C0-180 (°) | 55 |
| Beam angle C90-270 (°) | 55 |
| UGR _L | <16 |

Electrical

| | |
|--------------------|---------------------------------------|
| Insulation class | II |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 110-240 |
| LED current (mA) | 900 |
| Power supply | Remote included |
| Dimmable | No |
| Dimming interface | Remote Dimmable (Dimmer Not Included) |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class G

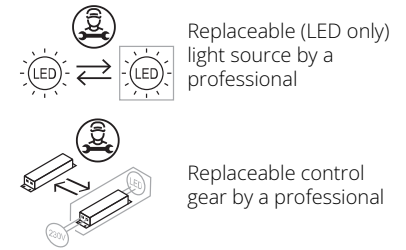

Notes

Pre-installation frame must be ordered separately

Accessories & Power Supply



REQUIRED
Frame

08.8975.00

Pre-installation frame



OPTIONAL
Filter

Optical

08.8977.00

Decorative screening accessory