


FLOS

 F011W30BU55 Brushed Stainless Steel

Captain Flint Outdoor W1 Dimmable 1-10V

Designed by Michael Anastassiades, 2015

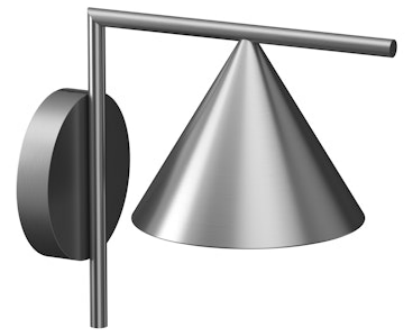

658lm - 3000K - CRI> 80 - Beam° 112

Wall-mounted lamp emitting diffused light. Fixed cone in painted and brushed aluminium. Features integrated 220–240 V on/off or 1–10 V/DALI dimmable electrical power. Plug & play electrical connection in the rose. IP68 connector for outdoor use included. 110 V version available upon request.

Designed by Michael Anastassiades, Captain Flint is a sleek and graceful design that embodies a sense of equilibrium, with the cone appearing to balance delicately on its point, creating a refined interplay between stability and movement. This outdoor wall-mounted version is the evolution of the original indoor floor design.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8054793217284
Mounting	Wall
Environments	Outdoor wet location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Number of lamps	1
System power (W)	9.5
Source flux (lm)	1133
System flux (lm)	658

Physical

Color	Brushed Stainless Steel
Orientation	Fixed
Length (in)	13.23
Net weight (lb)	4.63
Gross weight (lb)	5.09
Package height (in)	10.12
Package width (in)	15.98
Package length (in)	15.98
Package volume (in)	2585.16
IP internal	65



Download



Family spec sheet [↓ ZIP](#)
Mounting instructions [↓ ZIP](#)

Photometric Files


LDT / IES [↓ ZIP](#)

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

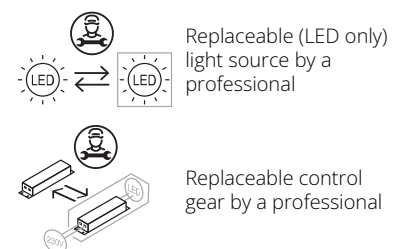

Schematic light drawing



Photometric

Light distribution	Symmetric
CCT (K)	3000
CRI>	80
Beam angle C0-180 (°)	112
Beam angle C90-270 (°)	112
Extreme cut off	No

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	110-277
Driver	Integrated
Dimmable	Yes
Dimming range (%)	1-100
Dimming interface	Dimmer Integrated
Precabled	NO
Emergency type	No
Batteries inside	No

Notes

110V version upon request.