

# FLOS

 F011W20AU55 Brushed Stainless Steel



## Captain Flint Outdoor W1

Designed by Michael Anastassiades, 2015

613lm - 2700K - CRI> 80 - Beam° 112

Wall-mounted lamp emitting diffused light. Fixed cone in painted and brushed aluminium. Features integrated 220–240 V on/off or 1–10 V/DALI dimmable electrical power. Plug & play electrical connection in the rose. IP68 connector for outdoor use included. 110 V version available upon request.

Designed by Michael Anastassiades, Captain Flint is a sleek and graceful design that embodies a sense of equilibrium, with the cone appearing to balance delicately on its point, creating a refined interplay between stability and movement. This outdoor wall-mounted version is the evolution of the original indoor floor design.

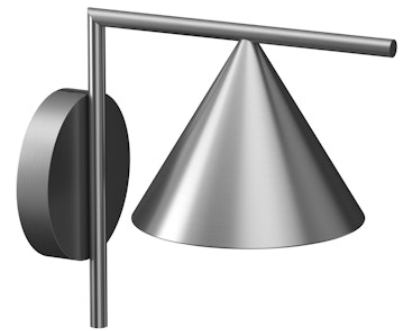

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

|                        |                      |
|------------------------|----------------------|
| EAN                    | 8054793216805        |
| Mounting               | Wall                 |
| Environments           | Outdoor wet location |
| Light Source Type      | LED                  |
| Light sources included | Yes                  |
| LED type               | LED array            |
| Number of lamps        | 1                    |
| System power (W)       | 9.5                  |
| Source flux (lm)       | 1055                 |
| System flux (lm)       | 613                  |

### Physical

|                     |                         |
|---------------------|-------------------------|
| Color               | Brushed Stainless Steel |
| Orientation         | Fixed                   |
| Length (in)         | 13.23                   |
| Net weight (lb)     | 4.63                    |
| Gross weight (lb)   | 5.09                    |
| Package height (in) | 10.12                   |
| Package width (in)  | 15.98                   |
| Package length (in) | 15.98                   |
| Package volume (in) | 2585.16                 |
| IP internal         | 65                      |

### Download



Family spec sheet [↓ ZIP](#)  
Mounting instructions [↓ ZIP](#)

### Photometric Files


LDT / IES [↓ LDT](#)

### Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

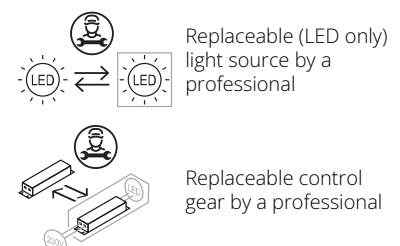

Schematic light drawing



Photometric

|                        |           |
|------------------------|-----------|
| Light distribution     | Symmetric |
| CCT (K)                | 2700      |
| CRI>                   | 80        |
| Beam angle C0-180 (°)  | 112       |
| Beam angle C90-270 (°) | 112       |
| Extreme cut off        | No        |

Electrical

|                    |            |
|--------------------|------------|
| Insulation class   | I          |
| Frequency (Hz)     | 50/60      |
| Main voltage (Vac) | 110-277    |
| Driver             | Integrated |
| Precabled          | NO         |
| Emergency type     | No         |
| Batteries inside   | No         |

Notes

110V version upon request.