


FLOS

F011W30A055 Brushed Stainless Steel

Captain Flint Outdoor W1


Designed by Michael Anastassiades, 2015

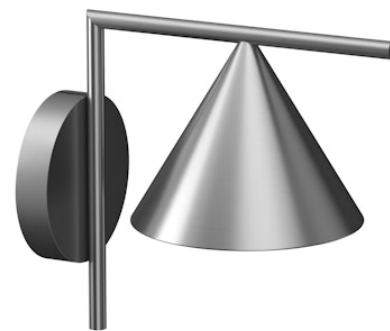

Luminaire for wall-mounting with diffuse light emission and fixed head. LED light source included. Integrated 220-240V ON/OFF or 1-10V/DALI dimmable electrical power. Connection is quickly ensured in the rose with the plug & play electrical connection and the IP68 connector included. Clamp bracket included. 110V version upon request.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

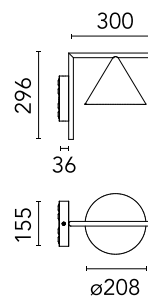

Main specifications

| | |
|------------------------|---------------|
| EAN | 8054793217048 |
| Mounting | Wall |
| Light source type | LED |
| Light sources included | Yes |
| LED type | LED array |
| Number of lamps | 1 |
| Power (W) | 10 |
| System power (W) | 9.5 |
| Source flux (lm) | 1026 |
| Lumen Output (lm) | 652 |

Physical

| | |
|---------------------|-------------------------|
| Colour | Brushed Stainless Steel |
| Trim | No |
| Orientation | Fixed |
| Spot diameter (mm) | 208 |
| Length (mm) | 336 |
| Net weight (kg) | 2.1 |
| Package height (mm) | 257 |
| Package width (mm) | 406 |
| Package length (mm) | 406 |
| Package volume (m3) | 0.04 |
| IP internal | 65 |
| Drive Over | No |

Download

[Mounting instructions](#)  ZIP

Photometric Files

[LDT / IES](#)  ZIP

Technical Drawings


[2D](#)  ZIP

[3D](#)  ZIP

[Bim](#)  ZIP



Schematic light drawing



| h(m) | E(lx) | D(m) |
|------|-------|-------|
| 1 | 225 | 3.05 |
| 2 | 56 | 6.11 |
| 3 | 25 | 9.16 |
| 4 | 14 | 12.22 |
| 5 | 9 | 15.27 |

Photometric

| | |
|------------------------|-----------|
| Lighting type | Direct |
| Light distribution | Symmetric |
| CCT (K) | 3000 |
| CRI> | 80 |
| Beam angle C0-180 (°) | 112 |
| Beam angle C90-270 (°) | 112 |
| Extreme cut off | No |

Electrical

| | |
|--------------------|--------------|
| Insulation class | I |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 220-240 |
| Power supply | Integrated |
| Power supply type | Non Dimmable |
| Precabled | NO |
| Emergency | No |
| Batteries inside | No |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Notes

110V version upon request.