

FLOS


F1856044 Anodized Champagne

Coordinates Ceiling 4

Designed by Michael Anastassiades, 2020

157W - 8830lm - 2700K - CRI> 95

Coordinates is a lighting system with diffuse light composed of horizontal and vertical luminaries arranged in a bright grid of various shapes and complexities. Each element is made of extruded anodized aluminium with a champagne finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the 1 ceiling models C4, its geometry was designed to be repeated to create large grids for custom installations. Each Coordinates configuration must include its own ceiling rose, whose integrated electronics allow for the use of different dimmer systems: push, 1-10, DALI. In the absence of these systems, the amount of light can be set during installation with the push system included in the rose. The related CI III version is also available for each configuration for installations with a remote power supply.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607001684
Mounting	Ceiling
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	157
Lumen Output (lm)	8830

Physical

Colour	Anodized Champagne
Length (mm)	1770
Net weight (kg)	8.1
Package volume (m3)	0.07
IP internal	20

Download

Mounting instructions [Download PDF](#)

Photometric Files

ULD [Download ZIP](#)

Technical Drawings

3D [Download ZIP](#)

[Bim](#) [Download ZIP](#)



Photometric


Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy
Labelling

This product contains a light source of energy efficiency class F

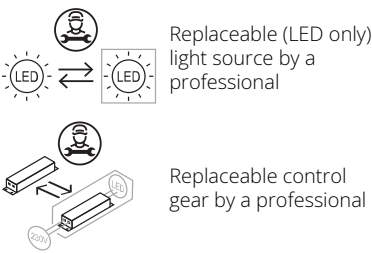

Spare Parts

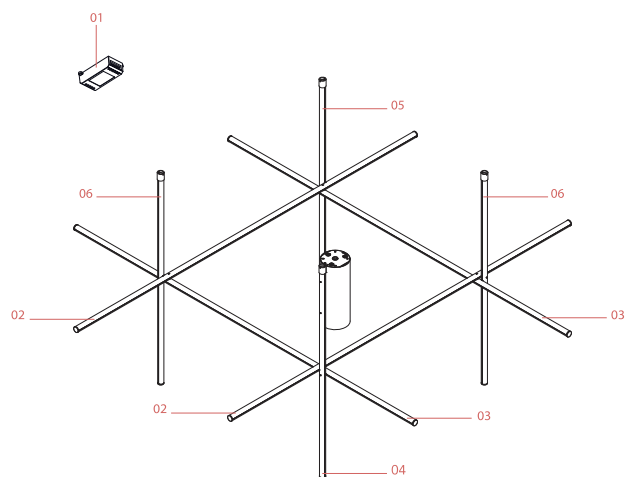

- | | | |
|-----|--|-----------|
| 01. | Led dimmer kit | RF0410300 |
| 02. | Coordinates Rod Assembly L1760
H-10 Anodized Champagne | RF30984 |
| 03. | Coordinates Rod Assembly L1760
H-11 Anodized Champagne | RF30985 |
| 04. | Coordinates Ceiling 4 Rod
Assembly L920 CA-07 Anodized
Champagne | RF30991 |
| 05. | Coordinates Ceiling 4 Rod
Assembly L920 C-08 Anodized
Champagne | RF30992 |
| 06. | Rod Assembly L920 C-09
Anodized Champagne | RF30993 |



RF0410300

Led dimmer kit



RF30984

Coordinates Rod Assembly L1760
H-10 Anodized Champagne



RF30985

Coordinates Rod Assembly L1760
H-11 Anodized Champagne



RF30991

Coordinates Ceiling 4 Rod
Assembly L920 CA-07 Anodized
Champagne



RF30992

Coordinates Ceiling 4 Rod
Assembly L920 C-08 Anodized
Champagne



RF30993

Rod Assembly L920 C-09
Anodized Champagne