

# FLOS

F1856044 Anodized Champagne

## Coordinates Ceiling 4

Designed by Michael Anastassiades, 2020

157W - 8830lm - 2700K - CRI> 95

Coordinates is a lighting system consisting of horizontal and vertical strip lights that form illuminated grid-like structures of various complexities. Each element is made of extruded anodized aluminum with a champagne finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the three ceiling models (C1 &ndash; C2 &ndash; C4), which may be combined with the respective Long versions for high ceilings (C1 Long, C2 Long, C4 Long). The 'Module C' is also available for large-scale installations. Available in two finishes: Champagne and Argent. Behind the design: This design evolved from a commission for the feature lighting of the main dining area of the historic Four Seasons restaurant in New York City. The restaurant relocated and opened in 2018 with the interiors designed by S&tilde;o Paolo-based architect Isay Weinfeld.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

### Main specifications

EAN	8059607001684
Mounting	Ceiling
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	157
System flux (lm)	8830

### Physical

Color	Anodized Champagne
Length (in)	69.68
Net weight (lb)	17.86
Gross weight (lb)	31.97
Package volume (in)	4079.57
IP internal	20



### Download

Mounting instructions [Download PDF](#)

### Photometric Files

ULD [Download ZIP](#)

### Technical Drawings

3D [Download ZIP](#)



Photometric


Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F

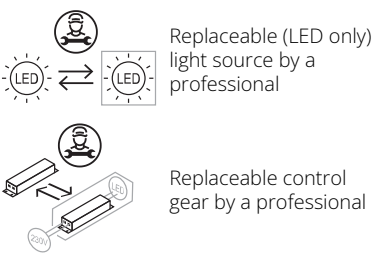

Spare Parts

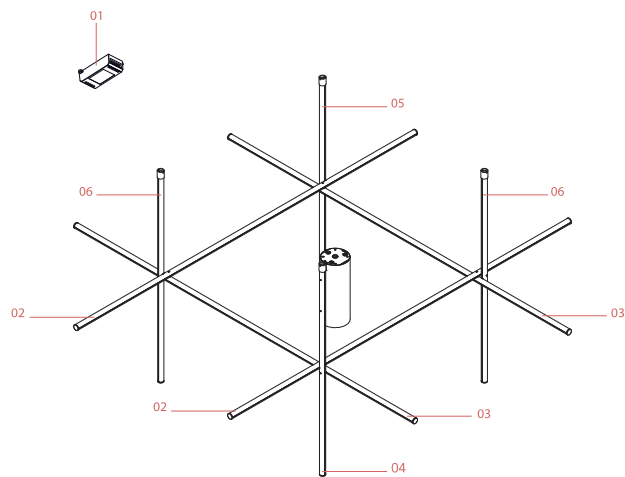

- |     |  |           |
|-----|--|-----------|
| 01. | Led dimmer kit   | RF0410300 |
| 02. | Coordinates Rod Assembly L1760<br>H-10 Anodized Champagne              | RF30984   |
| 03. | Coordinates Rod Assembly L1760<br>H-11 Anodized Champagne              | RF30985   |
| 04. | Coordinates Ceiling 4 Rod<br>Assembly L920 CA-07 Anodized<br>Champagne | RF30991   |
| 06. | Rod Assembly L920 C-09<br>Anodized Champagne                           | RF30993   |



RF0410300

Led dimmer kit



RF30984

Coordinates Rod Assembly L1760  
H-10 Anodized Champagne



RF30985

Coordinates Rod Assembly L1760  
H-11 Anodized Champagne



RF30991

Coordinates Ceiling 4 Rod  
Assembly L920 CA-07 Anodized  
Champagne



RF30993

Rod Assembly L920 C-09  
Anodized Champagne