

Coordinates Ceiling 4

Designed by Michael Anastassiades, 2020

157W - 8830lm - 2700K - CRI> 95

Ceiling-mounted lighting system emitting diffused light. Composed of horizontal and vertical luminaires arranged in a grid. Elements made of extruded anodised aluminium with a platinum optical silicone diffuser housing an integrated LED strip. Invisible electrical and mechanical connection. Each configuration includes a ceiling rose with integrated electronics for push, 1–10 V or DALI dimming.

Part of the Coordinates family by Michael Anastassiades, Coordinates Ceiling distils the system's illuminated grid into an architectural ceiling composition. Evolving from a commission for the historic Four Seasons restaurant in New York, Coordinates takes inspiration from the Cartesian grid, translating pure mathematical precision into light. Its modular, scalable system allows configurations ranging from minimal arrangements to complex installations. Elegant, imposing and expressive, it brings geometry to life within any space.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

EAN	8059607080856
Mounting	Ceiling
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	157
System flux (lm)	8830

Physical

Color	Argent
Length (in)	69.68
Net weight (lb)	17.86
Gross weight (lb)	31.97
Package volume (in)	4079.57
IP internal	20



Download

Mounting instructions [Download PDF](#)

Photometric Files

ULD [Download ZIP](#)

Technical Drawings

3D [Download ZIP](#)



Photometric

Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Spare Parts

00.

Coordinates Suspension 4 Rod
Assembly L1760 H-11 Argent


RF30919
01.

Led dimmer kit

RF35452
02.

Coordinates Suspension 4 Rod
Assembly L1760 H-10 Argent

RF30918

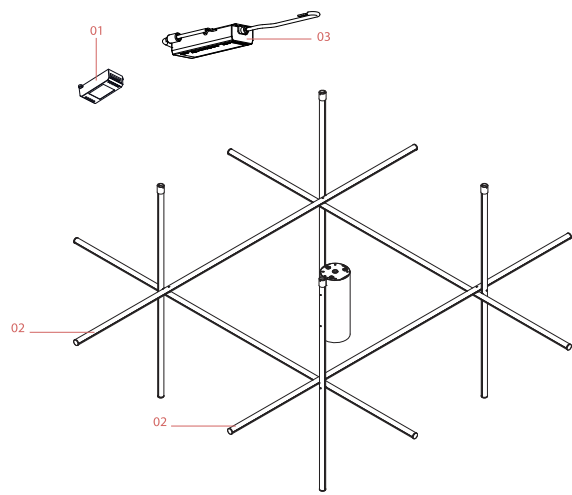



RF30919
Coordinates Suspension 4 Rod
Assembly L1760 H-11 Argent



RF35452
Led dimmer kit



RF30918
Coordinates Suspension 4 Rod
Assembly L1760 H-10 Argent