

# FLOS

F1880044 Anodized Champagne

## Coordinates Module Suspension

Designed by Michael Anastassiades, 2020




180W - 10230lm - 2700K - CRI> 90

Coordinates is a lighting system with diffuse light composed of horizontal and vertical luminaires arranged in a bright grid of various shapes and complexities. Each element is made of extruded anodized aluminium with a champagne finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the 4 hanging models (S1, S2, S3, S4) with 2.5-m cables. The 'S Module' is also available. Its geometry was designed to be repeated to create large grids for custom installations. Each Coordinates configuration includes its own ceiling rose, whose integrated electronics allow for the use of different dimmer systems: push, 1-10, DALI. In the absence of these systems, the amount of light can be set during installation with the push system included in the rose. The related CI III version is also available for each configuration for installations with a remote power supply.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

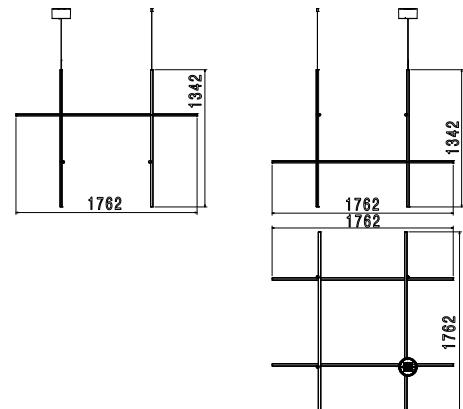

### Main specifications

EAN	8059607030820
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	180
Lumen Output (lm)	10230

### Physical

Colour	Anodized Champagne
Length (mm)	1770
Cord colour	Clear
Canopy colour	Anodized Champagne
Canopy length/diameter (mm)	181
Canopy height (mm)	95
Net weight (kg)	8.7
Package volume (m3)	0.06
IP internal	20

### Download

Mounting instructions

PDF

### Photometric Files

ULD

ZIP

### Technical Drawings

3D

ZIP

BIM

ZIP



## Photometric


Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	90
Extreme cut off	No

## Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

## Ecodesesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only)  
light source by a  
professional



Replaceable control  
gear by a professional

## Spare Parts

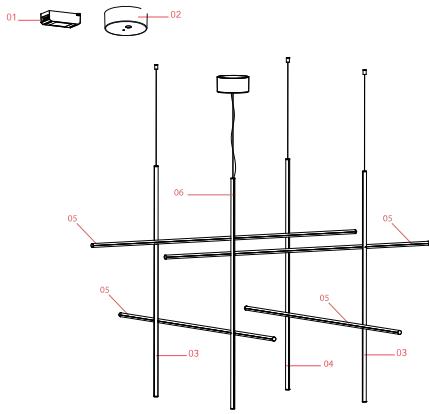

00.	Push button and cables assembly for dimmer	RF27318
01.	Led dimmer kit	RF34197
02.	Coordinates S Assembly Big Rose Anodized Champagne	RF1873144
03.	Coordinates S Rod Assembly L1340 S-29 Anodized Champagne	RF30988
04.	Coordinates S Rod Assembly L1340 S-30 Anodized Champagne	RF30989
05.	Coordinates S Rod Assembly L1760 H-31 Anodized Champagne	RF30990
06.	Coordinates S Rod Assembly L1340 SA-28 Anodized Champagne	RF31460



RF27318

Push button and cables assembly  
for dimmer



RF34197

Led dimmer kit



RF1873144

Coordinates S Assembly Big Rose  
Anodized Champagne



RF30988

Coordinates S Rod Assembly  
L1340 S-29 Anodized Champagne



RF30989

Coordinates S Rod Assembly  
L1340 S-30 Anodized Champagne



RF30990

Coordinates S Rod Assembly  
L1760 H-31 Anodized  
Champagne



RF31460

Coordinates S Rod Assembly  
L1340 SA-28 Anodized  
Champagne