


COORDINATES S3 UL SLV

Designed by Michael Anastassiades, 2020



71W - 3850lm - 2700K - CRI> 95

Coordinates is a lighting system consisting of horizontal and vertical strip lights that form illuminated grid-like structures of various complexities. This collection of standard chandeliers of pared-down configurations that can be used in any setting. Each suspended element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the four hanging models (S1, S2, S3, S4). The S Module is also available to create semi-custom designs for large-scale installations. Behind the design: This design evolved from a commission for the feature lighting of the main dining area of the historic Four Seasons restaurant in New York City. The restaurant relocated and opened in 2018 with the interiors designed by S˜o Paolo-based architect Isay Weinfeld.



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

EAN	8059607038420
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	71
System flux (lm)	3850

Physical

Color	Argent
Length (in)	30.71
Cord color	Black
Canopy color	Argent
Canopy height (in)	2.795
Net weight (lb)	7.05
Gross weight (lb)	14.99
Package volume (in)	2160.86
IP internal	20

Download

Mounting instructions [PDF](#)

Photometric Files

ULD [ZIP](#)

Technical Drawings

3D [ZIP](#)



Photometric


Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Accessories & Power Supply




OPTIONAL

RF27318

Push button and cables assembly
for dimmer

Spare Parts

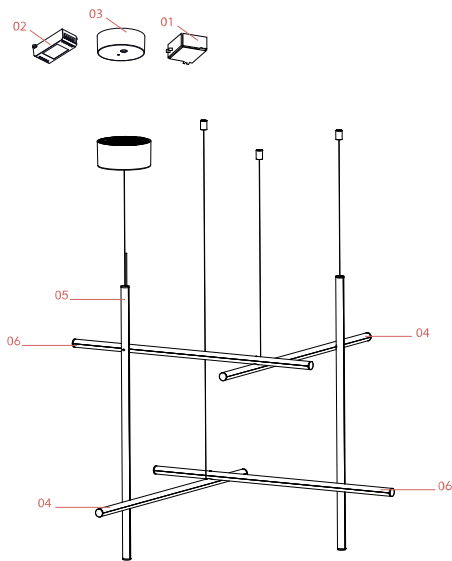

- | | | |
|-----|--|-----------|
| 01. | Power supply kit for Arrangements small & Noctambule | RF0410500 |
| 02. | Led dimmer kit | RF35452 |
| 03. | Assembly Rose for Coordinates Suspension Argent | RF1872133 |
| 04. | Coordinates Suspension S3 Rod Assembly L780 SH-03 Argent | RF30911 |
| 05. | Coordinates Suspension S3 Rod Assembly L780 SA-49 UL | RF30957 |
| 06. | Coordinates Suspension S3 Rod Assembly L780 H-02 Argent | RF30910 |
| 07. | Coordinates Suspension S3 Rod Assembly L780 S-04 Argent | RF30912 |




RF0410500

Power supply kit for
Arrangements small &
Noctambule



RF35452

Led dimmer kit




RF1872133

Assembly Rose for Coordinates
Suspension Argent



RF30911

Coordinates Suspension S3 Rod
Assembly L780 SH-03 Argent



RF30957

Coordinates Suspension S3 Rod
Assembly L780 SA-49 UL



RF30910

Coordinates Suspension S3 Rod
Assembly L780 H-02 Argent



RF30912

Coordinates Suspension S3 Rod
Assembly L780 S-04 Argent