

FLOS

F1842044 Anodized Champagne

Coordinates Suspension 1 CLIII

Designed by Michael Anastassiades, 2020




32W - 1920lm - 2700K - CRI> 95

Coordinates is a lighting system with diffuse light composed of horizontal and vertical luminaires arranged in a bright grid of various shapes and complexities. Each element is made of extruded anodized aluminium with a champagne finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the 4 hanging models (S1, S2, S3, S4) with 2.4-m cables. The 'S Module' is also available. Its geometry was designed to be repeated to create large grids for custom installations. Each Coordinates configuration includes its own ceiling rose, whose integrated electronics allow for the use of different dimmer systems: push, 1-10, DALI. In the absence of these systems, the amount of light can be set during installation with the push system included in the rose. The related CL III version is also available for each configuration for installations with a remote power supply.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

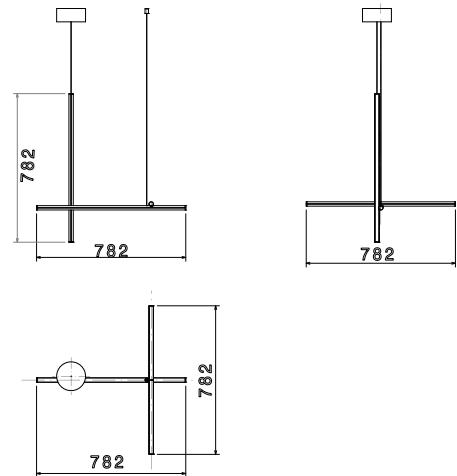

Main specifications

EAN	8059607032589
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	32
Lumen Output (lm)	1920

Physical

Colour	Anodized Champagne
Length (mm)	780
Cord colour	Clear
Canopy colour	Anodized Champagne
Canopy length/diameter (mm)	61
Canopy height (mm)	29
Net weight (kg)	1.2
Package volume (m3)	0.02
IP internal	20

Download

Mounting instructions

PDF

Photometric Files

ULD

ZIP


Technical Drawings

3D

ZIP

BIM

ZIP



Photometric


Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical

Insulation class	III
Main voltage (Vac)	48
Power supply	Remote excluded
Power supply type	Electronic 48V
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only)
light source by a
professional

Accessories & Power Supply



OPTIONAL

RF26994

12-48V Led Dimmer




OPTIONAL

RF29208

48Vdc 80W Power supply

Spare Parts

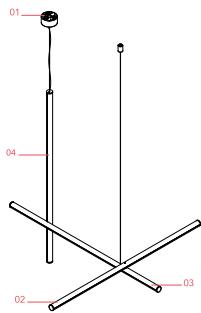

02.	Coordinates Suspension 1 Rod assembly L780 H-06 argent	RF31373
03.	Coordinates Suspension 3 Rod Assembly L780 SH-03 Anodized Champagne	RF31372
04.	Rod Assembly L780 SA-37 Anodized Champagne	RF31437



RF31373

Coordinates Suspension 1 Rod
assembly L780 H-06 argent



RF31372

Coordinates Suspension 3 Rod
Assembly L780 SH-03 Anodized
Champagne



RF31437

Rod Assembly L780 SA-37
Anodized Champagne