


Coordinates Suspension 1

Designed by Michael Anastassiades, 2020

37W - 1920lm - 2700K - CRI> 95

Coordinates is a lighting system with diffuse light composed of horizontal and vertical luminaries arranged in a bright grid of various shapes and complexities. Each element is made of extruded anodized aluminium with a champagne finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the 4 hanging models (S1, S2, S3, S4) with 2.4-m cables. The 'S Module' is also available. Its geometry was designed to be repeated to create large grids for custom installations. Each Coordinates configuration includes its own ceiling rose, whose integrated electronics allow for the use of different dimmer systems: push, 1-10, DALI. In the absence of these systems, the amount of light can be set during installation with the push system included in the rose. The related CI III version is also available for each configuration for installations with a remote power supply.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607001707
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	37
Lumen Output (lm)	1920

Physical

Colour	Anodized Champagne
Length (mm)	780
Cord colour	Clear
Canopy colour	Anodized Champagne
Canopy length/diameter (mm)	149
Canopy height (mm)	71
Net weight (kg)	2.1
Package volume (m3)	0.02
IP internal	20

Download

Mounting instructions [Download PDF](#)


Photometric Files

ULD [Download ZIP](#)

Technical Drawings

3D [Download ZIP](#)

[Bim](#) [Download ZIP](#)



Photometric

Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Spare Parts

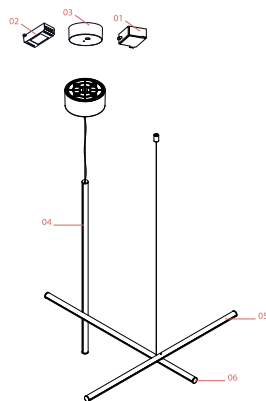

00.	Push button and cables assembly for dimmer	RF27318
01.	Power supply kit for Arrangements small & Noctambule	RF0410500
02.	Led dimmer kit	RF34197
03.	Coordinates S Ceiling rose cover Anodized Champagne	RF1872144
04.	Rod Assembly L780 SA-15 Anodized Champagne	RF31429
05.	Coordinates Suspension 1 Rod assembly L780 H-06 argent	RF31373
06.	Coordinates Suspension 3 Rod Assembly L780 SH-03 Anodized Champagne	RF31372



RF27318
Push button and cables assembly
for dimmer



RF0410500
Power supply kit for
Arrangements small &
Noctambule



RF34197
Led dimmer kit



RF1872144
Coordinates S Ceiling rose cover
Anodized Champagne



RF31429
Rod Assembly L780 SA-15
Anodized Champagne



RF31373
Coordinates Suspension 1 Rod
assembly L780 H-06 argent



RF31372
Coordinates Suspension 3 Rod
Assembly L780 SH-03 Anodized
Champagne