



## Coordinates Suspension 2 CLIII

Designed by Michael Anastassiades, 2020

50W - 2960lm - 2700K - CRI> 95

Coordinates is a lighting system with diffuse light composed of horizontal and vertical luminaries arranged in a bright grid of various shapes and complexities. Each element is made of extruded anodized aluminium with a champagne finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the 4 hanging models (S1, S2, S3, S4) with 2.4-m cables. The 'S Module' is also available. Its geometry was designed to be repeated to create large grids for custom installations. Each Coordinates configuration includes its own ceiling rose, whose integrated electronics allow for the use of different dimmer systems: push, 1-10, DALI. In the absence of these systems, the amount of light can be set during installation with the push system included in the rose. The related CI III version is also available for each configuration for installations with a remote power supply.

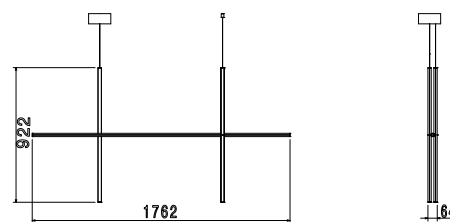

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

|                        |                     |
|------------------------|---------------------|
| EAN                    | 8059607038338       |
| Mounting               | Suspension          |
| Environments           | Indoor dry location |
| Light source type      | LED                 |
| Light sources included | Yes                 |
| LED type               | LED Module          |
| Power (W)              | 50                  |
| Lumen Output (lm)      | 2960                |

### Physical

|                             |        |
|-----------------------------|--------|
| Colour                      | Argent |
| Length (mm)                 | 1760   |
| Cord colour                 | Clear  |
| Canopy colour               | Argent |
| Canopy length/diameter (mm) | 61     |
| Canopy height (mm)          | 29     |
| Net weight (kg)             | 1.8    |
| Package volume (m3)         | 0.02   |
| IP internal                 | 20     |

### Download

Mounting instructions [Download PDF](#)


### Photometric Files

ULD [Download ZIP](#)

### Technical Drawings

3D [Download ZIP](#)

[Bim](#) [Download ZIP](#)



Photometric

|                    |            |
|--------------------|------------|
| Lighting type      | Total      |
| Light distribution | Asymmetric |
| CCT (K)            | 2700       |
| CRI>               | 95         |
| Extreme cut off    | No         |

Electrical

|                    |                 |
|--------------------|-----------------|
| Insulation class   | III             |
| Main voltage (Vac) | 48              |
| Power supply       | Remote excluded |
| Power supply type  | Electronic 48V  |
| Batteries inside   | No              |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Accessories & Power Supply



OPTIONAL

RF26994

12-48V Led Dimmer




OPTIONAL

RF29208

48Vdc 80W Power supply

Spare Parts

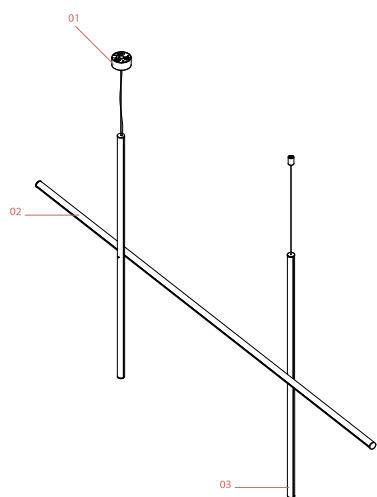

02.

Coordinates Suspension 2 Rod  
Assembly 1760 H-21 Argent

RF30929
03.

Coordinates Suspension 2 Rod  
Assembly L920 S-20 Argent

RF30928



RF30929  
Coordinates Suspension 2 Rod  
Assembly 1760 H-21 Argent



RF30928  
Coordinates Suspension 2 Rod  
Assembly L920 S-20 Argent