

FLOS

F1846044 Anodized Champagne

Coordinates Suspension 3 CLIII

Designed by Michael Anastassiades, 2020



64W - 3850lm - 2700K - CRI>95

Coordinates is a lighting system with diffuse light composed of horizontal and vertical luminaires arranged in a bright grid of various shapes and complexities. Each element is made of extruded anodized aluminium with a champagne finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the 4 hanging models (S1, S2, S3, S4) with 2.4-m cables. The 'S Module' is also available. Its geometry was designed to be repeated to create large grids for custom installations. Each Coordinates configuration includes its own ceiling rose, whose integrated electronics allow for the use of different dimmer systems: push, 1-10, DALI. In the absence of these systems, the amount of light can be set during installation with the push system included in the rose. The related CL III version is also available for each configuration for installations with a remote power supply.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607032602
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	64
Lumen Output (lm)	3850

Physical

Colour	Anodized Champagne
Length (mm)	1770
Cord colour	Clear
Canopy colour	Anodized Champagne
Canopy length/diameter (mm)	61
Canopy height (mm)	29
Net weight (kg)	2.3
Package volume (m3)	0.03
IP internal	20

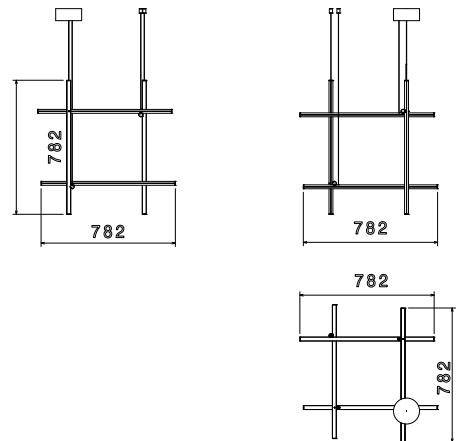

Download

Mounting instructions [PDF](#)


Photometric Files

ULD [ZIP](#)

Technical Drawings

3D [ZIP](#)

Bim [ZIP](#)



Photometric


Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical

Insulation class	III
Main voltage (Vac)	48
Power supply	Remote excluded
Power supply type	Electronic 48V
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only)
light source by a
professional

Accessories & Power Supply



OPTIONAL

RF26994

12-48V Led Dimmer




OPTIONAL

RF29209

48Vdc 180W Power supply

Spare Parts

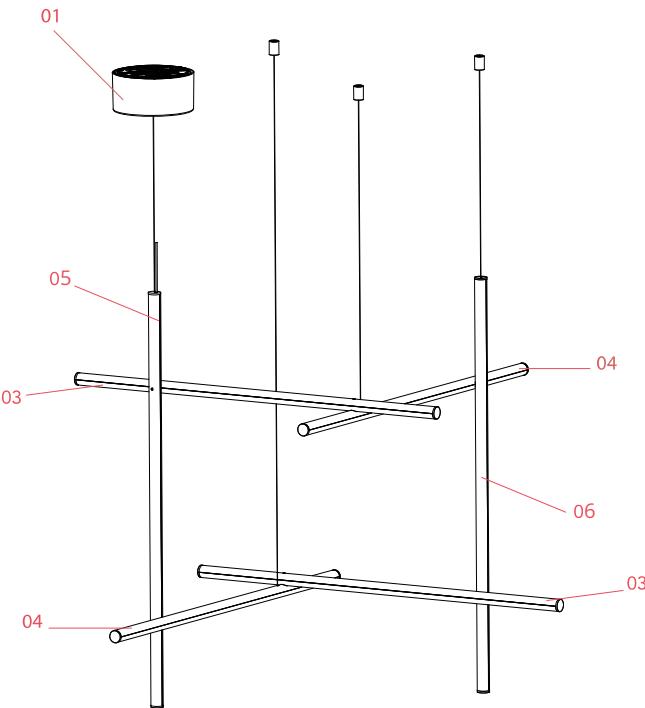

03.	Coordinates Suspension 3 Rod Assembly L780 H-02 Anodized Champagne	RF31449
04.	Coordinates Suspension 3 Rod Assembly L780 SH-03 Anodized Champagne	RF31372
05.	Coordinates Suspension 3 Rod Assembly L780 SA-39 Anodized Champagne	RF31452
06.	Coordinates Suspension 3 Rod Assembly L780 S-04 Anodized Champagne	RF31450



RF31449

Coordinates Suspension 3 Rod
Assembly L780 H-02 Anodized
Champagne

RF31372

Coordinates Suspension 3 Rod
Assembly L780 SH-03 Anodized
Champagne

RF31452

Coordinates Suspension 3 Rod
Assembly L780 SA-39 Anodized
Champagne

RF31450

Coordinates Suspension 3 Rod
Assembly L780 S-04 Anodized
Champagne