

FLOS

F1850044 Anodized Champagne


Coordinates Suspension 3

Designed by Michael Anastassiades, 2020



71W - 3850lm - 2700K - CRI>95

Coordinates is a lighting system with diffuse light composed of horizontal and vertical luminaires arranged in a bright grid of various shapes and complexities. Each element is made of extruded anodized aluminium with a champagne or argent finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the 4 hanging models (S3, S4) with 2.4-m cables. Each Coordinates configuration includes its own ceiling rose, whose integrated electronics allow for the use of different dimmer systems: push, 1-10, DALI. In the absence of these systems, the amount of light can be set during installation with the push system included in the rose.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607001653
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	71
Lumen Output (lm)	3850

Physical

Colour	Anodized Champagne
Length (mm)	780
Cord colour	Clear
Canopy colour	Anodized Champagne
Canopy length/diameter (mm)	149
Canopy height (mm)	71
Net weight (kg)	3.2
Package volume (m3)	0.04
IP internal	20

Download

Mounting instructions [PDF](#)


Photometric Files

ULD [ZIP](#)

Technical Drawings

3D [ZIP](#)

BIM [ZIP](#)



Photometric

Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No


Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy

Labelling

This product contains a light source of energy efficiency class F





Replaceable (LED only)
light source by a
professional



Replaceable control
gear by a professional

Spare Parts

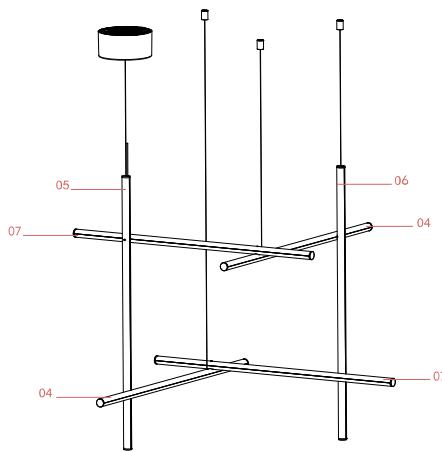

00.	Push button and cables assembly for dimmer	RF27318
01.	Power supply kit for Arrangements small & Noctambule	RF0410500
02.	Led dimmer kit	RF34197
03.	Coordinates S Ceiling rose cover Anodized Champagne	RF1872144
04.	Coordinates Suspension 3 Rod Assembly L780 SH-03 Anodized Champagne	RF31372
05.	Coordinates Suspension 3 Rod Assembly L780 SA-01 Anodized Champagne	RF31448
06.	Coordinates Suspension 3 Rod Assembly L780 S-04 Anodized Champagne	RF31450
07.	Coordinates Suspension 3 Rod Assembly L780 H-02 Anodized Champagne	RF31449



RF27318

Push button and cables assembly
for dimmer



RF0410500

Power supply kit for
Arrangements small &
Noctambule



RF34197

Led dimmer kit



RF1872144

Coordinates S Ceiling rose cover
Anodized Champagne



RF31372

Coordinates Suspension 3 Rod
Assembly L780 SH-03 Anodized
Champagne



RF31448

Coordinates Suspension 3 Rod
Assembly L780 SA-01 Anodized
Champagne



RF31450

Coordinates Suspension 3 Rod
Assembly L780 S-04 Anodized
Champagne



RF31449

Coordinates Suspension 3 Rod
Assembly L780 H-02 Anodized
Champagne