


Coordinates Suspension 3

Designed by Michael Anastassiades, 2020

71W - 3850lm - 2700K - CRI> 95

Coordinates is a lighting system consisting of horizontal and vertical strip lights that form illuminated grid-like structures of various complexities. This collection of standard chandeliers of pared-down configurations that can be used in any setting. Each suspended element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the four hanging models (S1, S2, S3, S4). The S Module is also available to create semi-custom designs for large-scale installations. Behind the design: This design evolved from a commission for the feature lighting of the main dining area of the historic Four Seasons restaurant in New York City. The restaurant relocated and opened in 2018 with the interiors designed by S˜o Paolo-based architect Isay Weinfeld.



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT


Main specifications

EAN	8059607034330
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	71
System flux (lm)	3850

Physical

Color	Anodized Champagne
Length (in)	30.71
Cord color	Black
Canopy color	Anodized Champagne
Canopy height (in)	2.795
Net weight (lb)	7.05
Gross weight (lb)	14.99
Package volume (in)	2160.86
IP internal	20

Download

Mounting instructions  PDF

Photometric Files

ULD  ZIP

Technical Drawings

3D  ZIP



Photometric


Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F

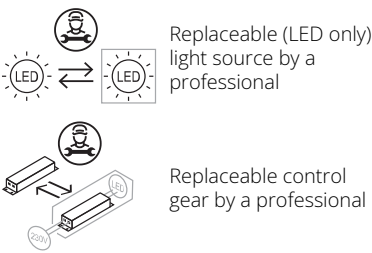

Replaceable (LED only) light source by a professional

Replaceable control gear by a professional

Accessories & Power Supply




OPTIONAL

RF27318

Push button and cables assembly
for dimmer

Spare Parts

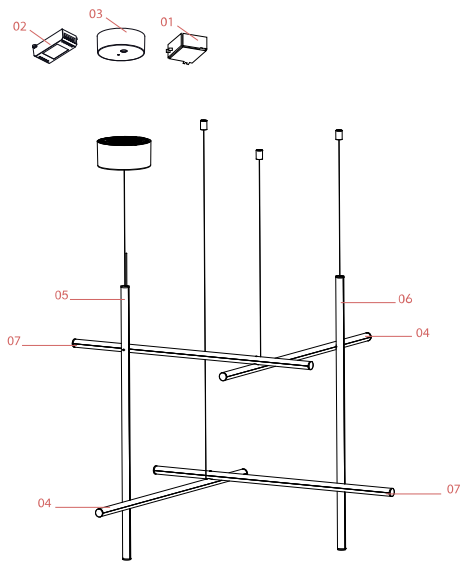

- | | | |
|-----|---|-----------|
| 01. | Power supply kit for Arrangements small & Noctambule | RF0410500 |
| 02. | Led dimmer kit | RF35452 |
| 03. | Coordinates S Ceiling rose cover Anodized Champagne | RF1872144 |
| 04. | Coordinates Suspension 3 Rod Assembly L780 SH-03 Anodized Champagne | RF31372 |
| 05. | Coordinates Suspension 3 Rod Assembly L780 SA-49 Anodized Champagne | RF31451 |
| 06. | Coordinates Suspension 3 Rod Assembly L780 S-04 Anodized Champagne | RF31450 |
| 07. | Coordinates Suspension 3 Rod Assembly L780 H-02 Anodized Champagne | RF31449 |



RF0410500

Power supply kit for
Arrangements small &
Noctambule



RF35452

Led dimmer kit



RF1872144

Coordinates S Ceiling rose cover
Anodized Champagne



RF31372

Coordinates Suspension 3 Rod
Assembly L780 SH-03 Anodized
Champagne



RF31451

Coordinates Suspension 3 Rod
Assembly L780 SA-49 Anodized
Champagne



RF31450

Coordinates Suspension 3 Rod
Assembly L780 S-04 Anodized
Champagne



RF31449

Coordinates Suspension 3 Rod
Assembly L780 H-02 Anodized
Champagne