


Coordinates Suspension 4 CLIII

Designed by Michael Anastassiades, 2020



147W - 8830lm - 2700K - CRI> 95

Coordinates is a lighting system with diffuse light composed of horizontal and vertical luminaries arranged in a bright grid of various shapes and complexities. Each element is made of extruded anodized aluminium with a champagne finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the 4 hanging models (S1, S2, S3, S4) with 2.4-m cables. The 'S Module' is also available. Its geometry was designed to be repeated to create large grids for custom installations. Each Coordinates configuration includes its own ceiling rose, whose integrated electronics allow for the use of different dimmer systems: push, 1-10, DALI. In the absence of these systems, the amount of light can be set during installation with the push system included in the rose. The related CI III version is also available for each configuration for installations with a remote power supply.

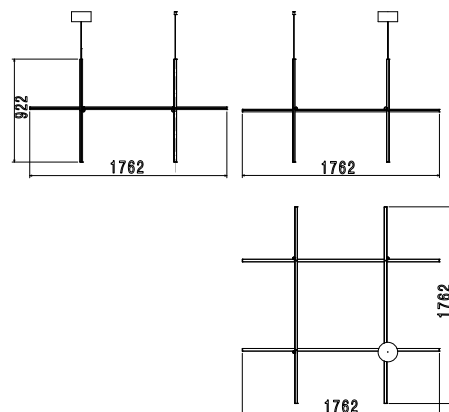

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607038376
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	147
Lumen Output (lm)	8830

Physical

Colour	Argent
Length (mm)	1770
Cord colour	Clear
Canopy colour	Argent
Canopy length/diameter (mm)	61
Canopy height (mm)	29
Net weight (kg)	5.2
Package volume (m3)	0.05
IP internal	20

Download

Mounting instructions



Photometric Files

ULD




Technical Drawings

3D



Bim





Photometric

Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical

Insulation class	III
Main voltage (Vac)	48
Power supply	Remote excluded
Power supply type	Electronic 48V
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only) light source by a professional

Accessories & Power Supply



OPTIONAL

RF26994

12-48V Led Dimmer



OPTIONAL

RF29209

48Vdc 180W Power supply

Spare Parts

02.

Coordinates Suspension 4 Rod
Assembly L920 S-13 Argent

RF30921
03.

Coordinates Rod Assembly L1760
H-10 Argent


RF30918
04.

Coordinates Suspension 4 Rod
Assembly L920 S-14 Argent

RF30922
05.

Coordinates Suspension Rod
Assembly L920 SA-40 Slv

RF30948

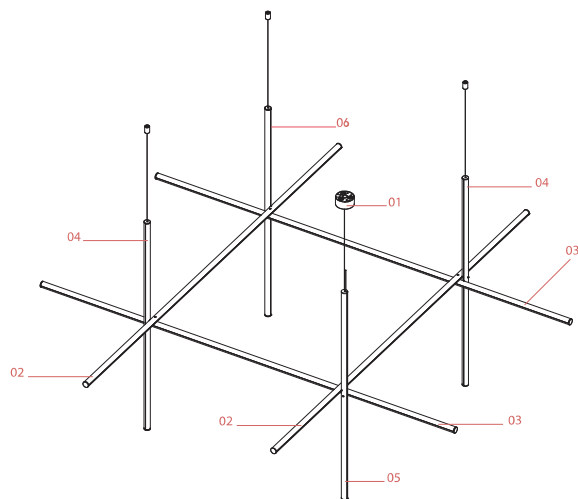



RF30921
Coordinates Suspension 4 Rod
Assembly L920 S-13 Argent



RF30918
Coordinates Rod Assembly L1760
H-10 Argent



RF30922
Coordinates Suspension 4 Rod
Assembly L920 S-14 Argent

FLOS

RF30948
Coordinates Suspension Rod
Assembly L920 SA-40 Slv