

FLOS

F1854044 Anodized Champagne


Coordinates Suspension 4

Designed by Michael Anastassiades, 2020



161W - 8830lm - 2700K - CRI> 95

Coordinates is a lighting system with diffuse light composed of horizontal and vertical luminaires arranged in a bright grid of various shapes and complexities. Each element is made of extruded anodized aluminium with a champagne or argent finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the 4 hanging models (S3, S4) with 2.4-m cables. Each Coordinates configuration includes its own ceiling rose, whose integrated electronics allow for the use of different dimmer systems: push, 1-10, DALI. In the absence of these systems, the amount of light can be set during installation with the push system included in the rose.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607001677
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	161
Lumen Output (lm)	8830

Physical

Colour	Anodized Champagne
Length (mm)	1762
Cord colour	Clear
Canopy colour	Anodized Champagne
Canopy length/diameter (mm)	181
Canopy height (mm)	95
Net weight (kg)	7.9
Package volume (m3)	0.06
IP internal	20

Download

Mounting instructions



Photometric Files

ULD



Technical Drawings

3D



BIM



Photometric

Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No


Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy

Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only)
light source by a
professional



Replaceable control
gear by a professional

Spare Parts

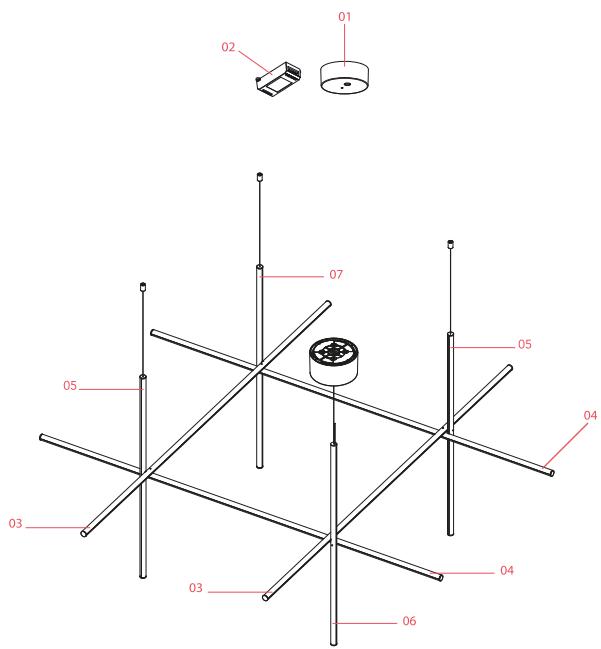

00.	Push button and cables assembly for dimmer	RF27318
01.	Coordinates S Assembly Big Rose Anodized Champagne	RF1873144
02.	Led dimmer kit	RF34197
03.	Coordinates Rod Assembly L1760 H-11 Anodized Champagne	RF30985
04.	Coordinates Rod Assembly L1760 H-10 Anodized Champagne	RF30984
05.	Coordinates Suspension 4 Rod Assembly L920 S-14 Anodized Champagne	RF30983
06.	Coordinates Suspension 4 Rod Assembly L920 S-13 Champagne	RF30982
07.	Coordinates Suspension 4 Rod Assembly L920 SA-12 Champagne	RF31454



RF27318

Push button and cables assembly
for dimmer



RF1873144

Coordinates S Assembly Big Rose
Anodized Champagne



RF34197

Led dimmer kit



RF30985

Coordinates Rod Assembly L1760
H-11 Anodized Champagne



RF30984

Coordinates Rod Assembly L1760
H-10 Anodized Champagne



RF30983

Coordinates Suspension 4 Rod
Assembly L920 S-14 Anodized
Champagne



RF30982

Coordinates Suspension 4 Rod
Assembly L920 S-13 Anodized
Champagne



RF31454

Coordinates Suspension 4 Rod
Assembly L920 SA-12 Anodized
Champagne