

## Coordinates Suspension 4

Designed by Michael Anastassiades, 2020

161W - 8830lm - 2700K - CRI> 95

Coordinates is a lighting system consisting of horizontal and vertical strip lights that form illuminated grid-like structures of various complexities. This collection of standard chandeliers of pared-down configurations that can be used in any setting. Each suspended element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the four hanging models (S1, S2, S3, S4). The S Module is also available to create semi-custom designs for large-scale installations. Behind the design: This design evolved from a commission for the feature lighting of the main dining area of the historic Four Seasons restaurant in New York City. The restaurant relocated and opened in 2018 with the interiors designed by S&tilde;o Paolo-based architect Isay Weinfeld.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

### Main specifications


EAN	8059607034354
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	161
System flux (lm)	8830

### Physical

Color	Anodized Champagne
Length (in)	69.68
Cord color	Black
Canopy color	Anodized Champagne
Canopy height (in)	3.740
Net weight (lb)	17.42
Gross weight (lb)	31.97
Package volume (in)	3827.42
IP internal	20



### Download

Mounting instructions  PDF

### Photometric Files

ULD  ZIP

### Technical Drawings

3D  ZIP



Photometric


Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy  
Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Accessories & Power Supply




OPTIONAL

RF27318

Push button and cables assembly  
for dimmer

Spare Parts

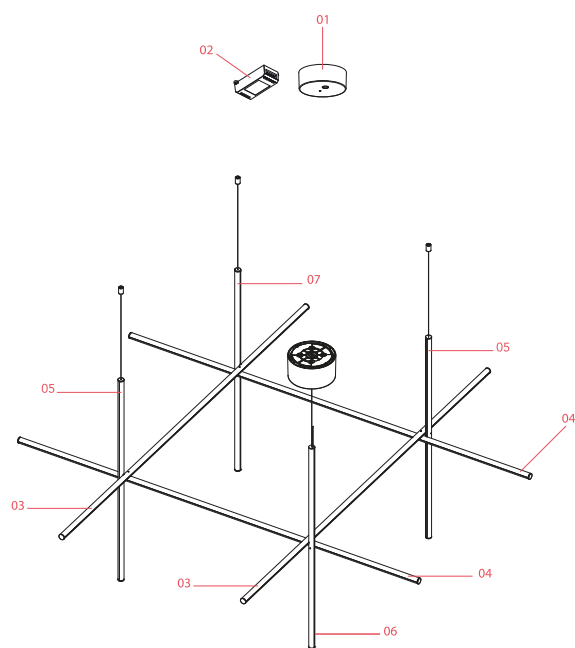

- |     |   |           |
|-----|---|-----------|
| 01. | Coordinates S Assembly Big Rose<br>Anodized Champagne                     | RF1873144 |
| 02. | Led dimmer kit  | RF35452   |
| 03. | Coordinates Rod Assembly L1760<br>H-11 Anodized Champagne                 | RF30985   |
| 04. | Coordinates Rod Assembly L1760<br>H-10 Anodized Champagne                 | RF30984   |
| 05. | Coordinates Suspension 4 Rod<br>Assembly L920 S-14 Anodized<br>Champagne  | RF30983   |
| 06. | Coordinates Suspension 4 Rod<br>Assembly L920 S-13 Champagne              | RF30982   |
| 07. | Coordinates Suspension 4 Rod<br>Assembly L920 SA-50 Anodized<br>Champagne | RF30267   |



RF1873144  
Coordinates S Assembly Big Rose  
Anodized Champagne



RF35452  
Led dimmer kit



RF30985  
Coordinates Rod Assembly L1760  
H-11 Anodized Champagne



RF30984  
Coordinates Rod Assembly L1760  
H-10 Anodized Champagne



RF30983  
Coordinates Suspension 4 Rod  
Assembly L920 S-14 Anodized  
Champagne



RF30982  
Coordinates Suspension 4 Rod  
Assembly L920 S-13 Champagne



RF30267  
Coordinates Suspension 4 Rod  
Assembly L920 SA-50 Anodized  
Champagne