

Coordinates Wall 1

Designed by Michael Anastassiades, 2020

21W - 961lm - 2700K - CRI> 90

Wall-mounted diffuse lighting device composed of a horizontal bar (model Wall 1) or vertical and horizontal bar (model W2). Each bar is composed of: extruded and processed aluminium body anodized in a champagne colour; diffuser in platinum optical silicone; integrated LED strip (CRI 90). Each model comes with its own rose, whose integrated electronics allow for the use of different dimmer systems.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

EAN	8059607035238
Mounting	Wall
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	21
System power (W)	21
Lumen Output (lm)	961

Physical

Colour	Anodized Champagne
Length (mm)	100
Net weight (kg)	0.8
Package height (mm)	145
Package width (mm)	290
Package length (mm)	890
Package volume (m3)	0.04
IP internal	20

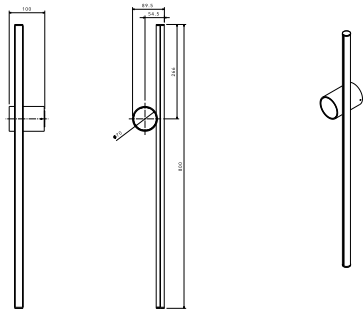

Download


- Mounting instructions [PDF](#)
- Dimmers or chargers compatible [PDF](#)

Photometric Files

- ULD [ZIP](#)
- LDT / IES [LDT](#)

Technical Drawings

- 3D [ZIP](#)
- Bim [ZIP](#)



Photometric


Light distribution	Asymmetric
CCT (K)	2700
CRI>	90
Extreme cut off	No

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Mains Cut Dimming
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No


Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F

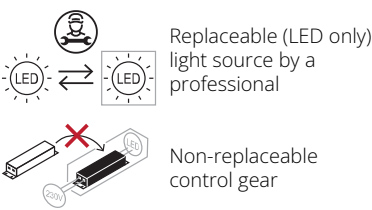


Spare Parts

01. Coordinates W1 Power supply assembly – New type RF37005

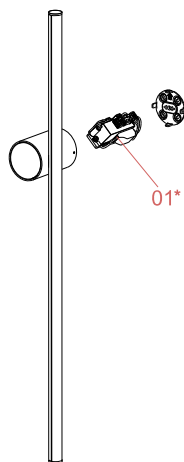

***ATTENTION:** This spare part is compatible only with the new product versions.

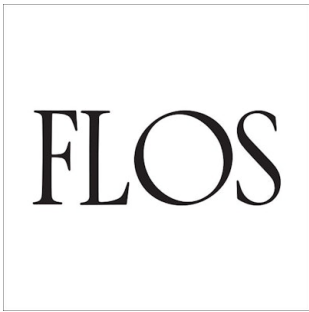

RF37005
Coordinates W1 Power supply
assembly – New type