

# FLOS

FA53906633-300 Anthracite

## Dooku 400 Double Top Pole Ø102 mm Symmetric Optic Dimmable Dali


Designed by FLOS Outdoor



LED source included. Integrated power supply 220-240V ON/OFF and dimmable 1-10V or DALI. Fixing bracket included. Equipped with a 400mm protruding neoprene cable section and IP68 connectors. Double socket for 102mm diameter post. The post must be ordered separately. Smart-City version available upon request.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

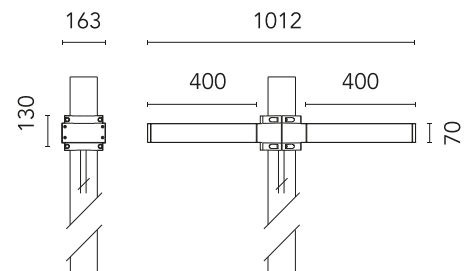

### Main specifications

EAN	8054793805634
Mounting	Pole Top
Power (W)	67
Source flux (lm)	18252
Lumen Output (lm)	15010

### Physical

Colour	Anthracite
Orientation	Fixed
Net weight (kg)	13.09
Package height (mm)	605
Package width (mm)	175
Package length (mm)	150
Package volume (m3)	0.02
IP internal	65

### Download

[Mounting instructions](#)  ZIP

### Photometric Files

[LDT / IES](#)  ZIP


### Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



## Schematic light drawing



Beam Angle: 121°

h(m)	E(lx)	D(m)
1	948	3.54
2	237	7.09
3	105	10.63
4	59	14.18
5	38	17.72

Luminous flux luminaire  
3631 lm

## Photometric

CCT (K) 3000

Beam angle C0-180 (°) 120

Beam angle C90-270 (°) 120

Extreme cut off No

## Electrical

Power supply type Dimmable DALI 1

Emergency No

## Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance