

# FLOS

FA53904133-300 Anthracite

## Dooku 400 Single Top Pole Ø76 mm Street Optic Dimmable Dali


Designed by FLOS Outdoor



LED source included. Integrated power supply 220-240V ON/OFF and dimmable 1-10V or DALI. Fixing bracket included. Equipped with a 400mm protruding neoprene cable section and IP68 connectors. Single socket for 76mm diameter post. The post must be ordered separately. Smart-City version available upon request.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

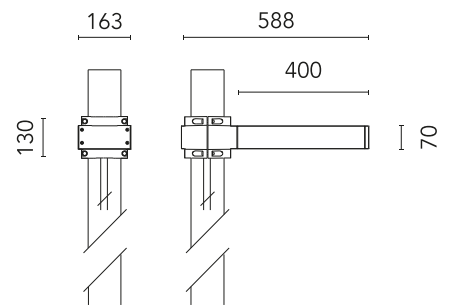

### Main specifications

EAN	8054793802169
Mounting	Pole Top
Power (W)	67
Source flux (lm)	18252
Lumen Output (lm)	15010

### Physical

Colour	Anthracite
Orientation	Fixed
Net weight (kg)	13.09
Package height (mm)	605
Package width (mm)	175
Package length (mm)	150
Package volume (m <sup>3</sup> )	0.02
IP internal	65

### Download

[Mounting instructions](#)  ZIP

### Photometric Files

[LDT / IES](#)  ZIP


### Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



## Schematic light drawing



Beam Angle: 61°

h(m)	E(lx)	D(m)
1	1193	1.38
2	298	2.76
3	133	4.14
4	75	5.52
5	48	6.90

## Photometric

Extreme cut off No

## Electrical

Power supply type Dimmable DALI 1

Emergency No

## Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

---